


Alle Rechte vorbehalten / All rights reserved

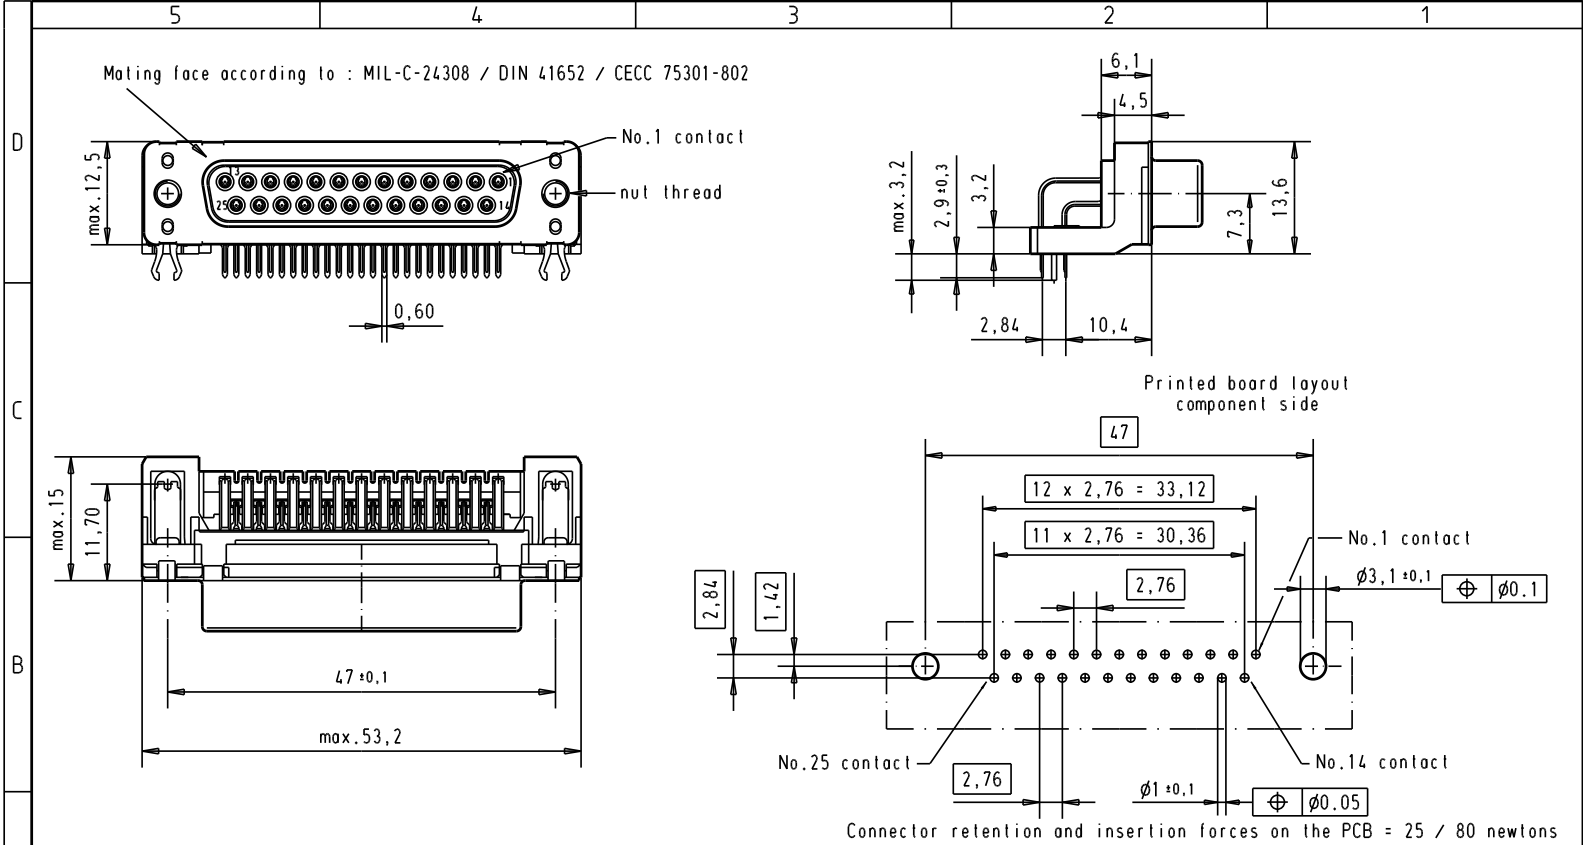

Connector retention and insertion forces on the PCB = 25 / 80 newtons

| | | | | | | | | | | | |
|----------------|------------|-------------------|-------|----------|------|-------------------------------|------|------|--|--|-------------------------------------|
| 09 66 357 3611 | M 3 | 1 | | | | | Del. | Name | <p>All Dim. in mm Orig. Size DIN A 4</p> | <p>D-Sub, high temperature, female, standard, 25 poles with solder pins 2,9 mm, nuts and grounding board lock.</p> | <p>Mößstab/ Scale 1.5:1</p> |
| 09 66 357 6611 | M 3 | 2 | | | | Detail: 05/03/02 | CV | | | | |
| 09 66 357 7611 | M 3 | 3 | | | | Insp. | | | | | |
| 09 66 357 3612 | 4-40 UNC | 1 | | | | Stand. | | | | | |
| 09 66 357 6612 | 4-40 UNC | 2 | 31892 | 05/05/04 | JH | HARTING EURL F-95972 Paris | | | <p>TB 0966357x61x</p> | <p>Blatt / Page 2 /</p> | |
| 09 66 357 7612 | 4-40 UNC | 3 | 29723 | 05/03/02 | CV | Sub. | | | | | |
| Part number | Nut thread | Performance level | Mod. | Del. | Name | | | | | | |