


DIN 41 612 · complementary to type R (HE 11)



Number of contacts

96, 64, 32

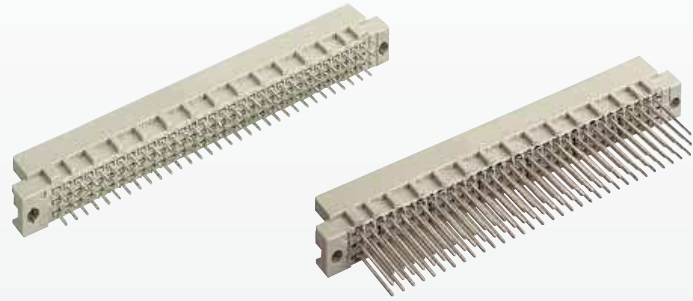


DIN Signal to 2 A

Male connectors

Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to IEC 60 603-2. Explanation chapter 00	
				3	2 1
Male connector with solder pins 2.5 mm	96		09 79 196 7902		09 79 196 6902
	64		09 79 164 7902		09 79 164 6902
	32		09 79 132 7902		09 79 132 6902
Male connector with solder pins 4.0 mm	96		09 79 196 7903		09 79 196 6903 09 79 396 6903 ^{b)}
	64		09 79 164 7903		09 79 164 6903 09 79 364 6903 ^{b)}
	32		09 79 132 7903		09 79 132 6903
Male connector with wrap posts 13 mm	96		09 79 196 7907		09 79 196 6907
	64		09 79 164 7907		09 79 164 6907
	32		09 79 132 7907		09 79 132 6907

Performance level 1 on request

Dimensions

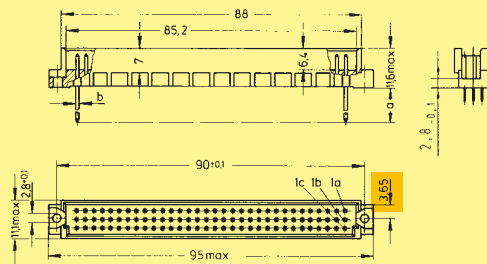



a	b
2.5 4	∅ 0.7

Solder pins

a	b
13	□ 0.6


Wrap posts

Panel cut out

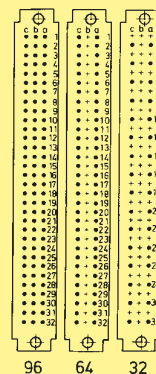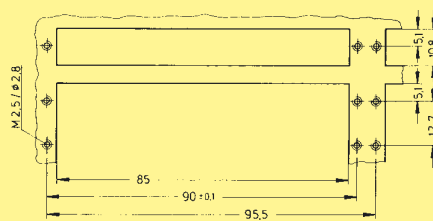

Contact arrangement
View from termination side

Board drillings Mounting side

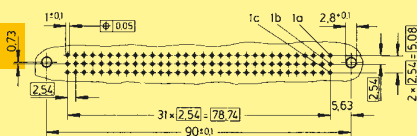

01
36

Dimensions in mm

Other contact arrangements on request

= deviating dimensions from standard male connectors (see page 01.34)

^{b)} Connectors with snap-in clips see chapter 00