


FO-55111-A

HONEYWELL  
PART NUMBER  
111SM2-T  
PRODUCT CODE  
TYJ0260

REV	DOCUMENT	CHANGED BY	CHECK
10	0038225	PRS 04APR08	BLR

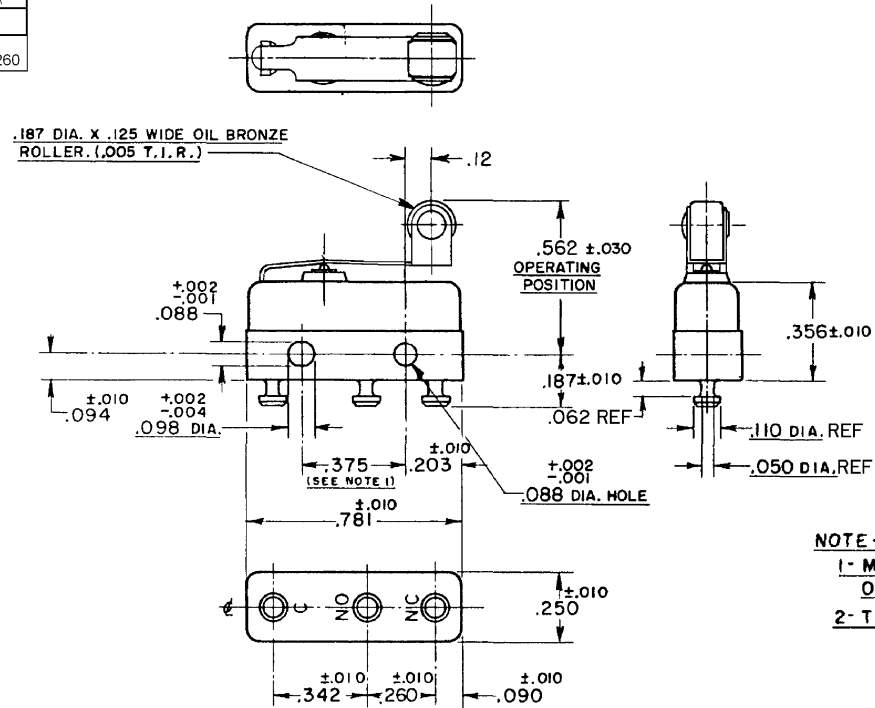

RELEASE NO. SR - 7730  
REPLACES

CHARACTERISTICS
OPERATING FORCE - - - 7 OZ MAX
RELEASE FORCE - - - - 2 OZ MIN
PRETRAVEL - - - - - .219 MAX
DIFFERENTIAL TRAVEL - - .025 MAX
OVERTRAVEL - - - - - .030 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT S P D T	
30 VOLTS DC RATING	
SEA LEVEL	50,000 FT
INDUCTIVE	3 AMP 2.5 AMP
RESISTIVE	5 AMP 5 AMP
MAXIMUM INRUSH 24 AMP	
KEMA CE	5A, 250V ~ T85 1E4
UL CSA	5A, 250 VAC ~

DESIGN UNITS: INCH	
TOLERANCES UNLESS NOTED:	
NO PLACE	X ±
ONE PLACE	.X ±
TWO PLACE	.XX ±
THREE PLACE	.XXX ±
FOUR PLACE	.XXXX ±
ANGLES	±
THIRD ANGLE PROJECTION	

DRAWN	VK	25 OCT 07
CHECK	RJ	25 OCT 07
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

<b>Honeywell</b>			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	111SM2-T	10
SCALE	-	WEIGHT .008 LB MAX	SHEET 1 OF 1

4

3

2

1