





MOLD-TO-POSITION PRODUCT
Minimums or set-up charges may apply. Call Samtec.



SCREW MOUNT DIP SOCKETS IC & ICS SERIES

Mates with:
AP, APS, APO,
APA, APE, APH

Highest reliability DIP sockets

IC and ICS series DIP sockets feature U.L. rated G.F. polyester body with mounting holes and use precision machined lead sockets for high reliability in the most demanding applications.

Specifications:

IC & ICS Insulator Material: Black Glass Filled Polyester
Flammability Rating: UL 94V-0
Insulation Resistance: 5000 megohm @ 500 VDC
Temperature Range: -55°C to +125°C
Withstanding Voltage: 1000 VRMS@60 Hz
Contact: BeCu
Shell: Brass except style K Phosphor Bronze
Plating: Au over 50µ" Ni or Sn over 100µ" Cu or 50µ" Ni
Current Rating: 1 amp continuous @ 100 VDC per contact
Contact Resistance: 10 milliohms @ 200 milliamperes
Socket Retention in Body: 5 lbs against barb
Lead Size Range: .015" to .022" DIA and most IC leads
Insertion Force: Standard = 9 oz avg, 16 oz max (.017" DIA probe); Low Insertion Force = 2.5 oz avg, 5.5 oz max (.018" DIA probe)
Withdrawal Force: Standard = 2.5 oz avg, 1.5 oz min (after 12 insertions with .017" DIA probe); Low Insertion Force = 2.0 oz avg, 0.35 oz min (after 12 insertions with .018" DIA probe)




TYPE SOCKET - **ROW SPACING & NO. OF CONTACTS**

IC
= IC Socket


ICS
= IC Socket

-S*, -A*, -J, or -K
= Printed Circuit
*For LIF Specify -ZS or -ZA

LEAD STYLE	X DIA	Y TAIL	Z
-S or -ZS	(0.51) .020	(3.18) .125	(7.62) 300
-A or -ZA	(0.51) .020	(4.57) .180	(8.89) 350
-J	(0.64) .025	(10.41) .410	(15.24) 600
-K	(0.89) .035	(12.95) .510	(17.86) 703



Style S, ZS, A, ZA & J Insertion Depth = .095" to .150"
Style S Component Part No. = SC-1P1
Style ZS Component Part No. = EZ-1P1
Style A Component Part No. = SC-6P1
Style ZA Component Part No. = EZ-6P1
Style J Component Part No. = SC-1P3
Option L Insertion Depth = .095" to .150"
Option L Component Part No. = SC-1L1 or EZ-1L1
Style K Insertion Depth = .125" to .170"
Style K Component Part No. = SC-2P1




Low Insertion Force (LIF) Contacts Available.

- 306 = .300 Row 6Contacts
- 308 = .300 Row 8 Contacts
- 310 = .300 Row 10 Contacts


Part No.	A Length	B Width
IC or ICS-306	(8.89) .350	(10.16) .400
IC or ICS-308	(11.43) .450	(10.16) .400
IC or ICS-310	(13.97) .550	(10.16) .400

* Mounting hole off center on 10 position.




- 314 = .300 Row 14 Contacts
- 316 = .300 Row 16 Contacts
- 318 = .300 Row 18 Contacts
- 320 = .300 Row 20 Contacts
- 324 = .300 Row 24 Contacts
- 422 = .400 Row 22 Contacts
- 424 = .400 Row 24 Contacts

Part No.	A Length	B Width	E Mnt Holes
IC or ICS-314	(17.78) .700	(10.16) .400	(10.16) .400
IC or ICS-316	(20.32) .800	(10.16) .400	(12.70) .500
IC or ICS-318	(22.86) .900	(10.16) .400	(15.24) .600
IC or ICS-320	(25.40) 1.000	(10.16) .400	(17.78) .700
IC or ICS-324	(30.48) 1.200	(10.16) .400	(22.86) .900
IC or ICS-422	(27.94) 1.100	(10.16) .400	(20.32) .800
IC-424	(30.48) 1.200	(12.70) .500	(22.86) .900

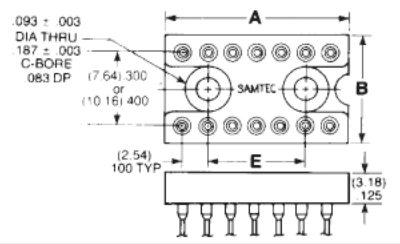

- 610 = .600 Row 10 Contacts
- 614 = .600 Row 14 Contacts
- 616 = .600 Row 16 Contacts
- 618 = .600 Row 18 Contacts

Part No.	A Length
IC-610	(12.70) .500
IC-614	(17.78) .700
IC-616	(20.32) .800
IC-618	(22.86) .900



Note:
Some sizes, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.


WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 • Fax: 812-948-5047
SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0 • Fax: +49 (0) 89 / 89460-299
SAMTEC SCANDINAVIA • Tel: +46-84477280 • Fax: +46-8420413
SAMTEC ASIA PACIFIC • Tel: 85 6745-5955 • Fax: 85 6841-1502
SAMTEC JAPAN • Tel: 045-475-1385 • Fax: 045-475-1340
SAMTEC SILICON VALLEY • Tel: 408-395-5900 • Fax: 408-395-1520
SAMTEC FRANCE • Tel: 01 60 95 06 60 • Fax: 01 60 95 06 61
SAMTEC CHINA • Tel: 86-21-61103766 • Fax: 86-21-53854047
SAMTEC INDIA • Tel: +91-80-3272 1612 • Fax: +91-80-4152 8187
SAMTEC TAIWAN • Tel: 886 02 2698-3367 • Fax: 886 02 8698-2159
SAMTEC UK • Tel: 01236 739292 • Fax: 01236 727113
SAMTEC ITALY • Tel: 39 039 6890337 • Fax: 39 039 6890315
SAMTEC SOUTH AFRICA • Tel: 27 11 4528112 • Fax: 27 86 6714432
SAMTEC ANZ • Tel: 613 9512 7747 • Fax: 613 9512 7745



MOLD-TO-POSITION PRODUCT

Minimums or set-up charges may apply. Call Samtec.



CO-314-SGG


LEAD STYLE

PLATING OPTION

OPTION
(Leave Blank for Standard Version)

-W

= Wire-Wrap
For LIF Specify -ZW



Shorter w/w tail lengths available. See OPTION.


Insertion Depth = .125" to .170"
Style W Component Part No. = SC-1W1(1)
Style ZW Component Part No. = EZ-1W1(1)
Style W-2 Component Part No. = SC-1W1(2)
Style ZW-2 Component Part No. = EZ-1W1(2)
Style W-3 Component Part No. = SC-1W1(3)
Style ZW-3 Component Part No. = EZ-1W1(3)

-E or -H

= Elevated
For LIF Specify -ZE or -ZH

LEAD STYLE	X DIA	W TAIL	Y	Z
-E or -ZE	(0.51) .020	(4.32) .170	(8.86) .349	(13.77) .543
-H or -ZH	(0.46) .018	(3.81) .150	(12.95) .510	(17.86) .703

Insertion Depth = .125" to .175"
Style E Component Part No. = SC-2P3
Style ZE Component Part No. = EZ-2P3
Style H Component Part No. = SC-2P2
Style ZH Component Part No. = EZ-2P2



GG

= 30µ" Gold Contact
10µ" Gold Shell

GT

= 30µ" Gold Contact
Tin Shell

TT

= Tin Contact and Shell
(-S, -ZS, -W, -ZW, -A, -H only)

ST

= 10µ" Gold Contact
Tin Shell
(-S & -ZS only)

-2

= (9.14) .360
Wire-Wrap Tail

Wire-Wrap Option

Requires Style -W or -ZW

-3


= (6.60) .260
Wire-Wrap Tail

Specify desired suffix for shorter Wire-Wrap tail.

-L

= Locking Socket

Requires Style -S or -ZS and .035"±.003" board hole.



-624 = .600 Row / 24 Contacts

-628 = .600 Row / 28 Contacts


-632 = .600 Row / 32 Contacts

-640 = .600 Row / 40 Contacts

-940 = .900 Row / 40 Contacts

-950 = .900 Row / 50 Contacts

-964 = .900 Row / 64 Contacts



Part No.	A Length	B Width
IC or ICS-624	(30.48) 1.200	(17.78) .700
IC or ICS-628	(35.56) 1.400	(17.78) .700
IC or ICS-632	(40.64) 1.600	(17.78) .700
IC or ICS-640	(50.80) 2.000	(17.78) .700
*IC-940		
*IC-950	(63.50) 2.500	(26.27) 1.050
IC-964	(81.28) 3.200	

*IC-940 and IC-950 are non-standard non-returnable.

†Mounting hole off center on 50 positions

CRYSTAL OSCILLATOR CO SERIES

SPECIFY PART NUMBER FROM CHART BELOW

OPTION
(Leave Blank for Standard Version)

Part Number	Termination Suffix*		Number of Contacts	Contact Finish	Shell Finish
	P.C.	W/W			
CO-314	-SGG	-WGG	4	Gold Gold Tin	Gold Tin Tin
	-SGT	-WGT			
	-STT	-WTT			
CO-316	-SGG	-WGG	4	Gold Gold Tin	Gold Tin Tin
	-SGT	-WGT			
	-STT	-WTT			
CO-624	-SGG	-WGG	4	Gold Gold Tin	Gold Tin Tin
	-SGT	-WGT			
	-STT	-WTT			

-2

= (9.14) .360
Wire-Wrap Tail

Wire-Wrap Option

Requires Style -W or -ZW

-3

= (6.60) .260
Wire-Wrap Tail


Specify desired suffix for shorter Wire-Wrap tail.

Crystal Oscillator

Accepts any component leads from .015" to .022" diameter. Low profile with precision machined lead sockets for high retention and reliability.

Specifications: CO

Same as IC Series.

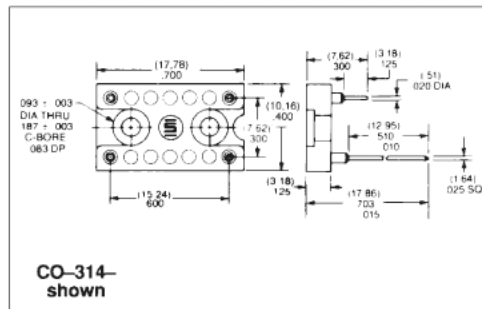

CO-314-shown

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 • Fax: 812-948-5047 SAMTEC SILICON VALLEY • Tel: 408-395-5900 • Fax: 408-395-1520 SAMTEC UK • Tel: 01236 739292 • Fax: 01236 727113
SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0 • Fax: +49 (0) 89 / 89460-299 SAMTEC FRANCE • Tel: 01 60 95 06 60 • Fax: 01 60 95 06 61 SAMTEC ITALY • Tel: 39 039 6890337 • Fax: 39 039 6890315

SAMTEC SCANDINAVIA • Tel: +46-84477280 • Fax: +46-87420413 SAMTEC ISRAEL • Tel: 972-3-7526600 • Fax: 972-3-7526690 SAMTEC INDIA • Tel: +91-80-3272 1612 • Fax: +91-80-4152 8187
SAMTEC ASIA PACIFIC • Tel: 85 6745-5955 • Fax: 85 6741-1502 SAMTEC JAPAN • Tel: 045-475-1385 • Fax: 045-475-1340 SAMTEC CHINA • Tel: 86-21-61103766 • Fax: 86-21-53854047 SAMTEC TAIWAN • Tel: 886 02 2698-3367 • Fax: 886 02 8698-2159
Downloaded from Datasheet.su : 82-31-717-5685 • Fax: 82-31-717-5681 SAMTEC SOUTH AFRICA • Tel: 27 11 4528112 • Fax: 27 86 6714432 SAMTEC ANZ • Tel: 613 9512 7747 • Fax: 613 9512 7745