







This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

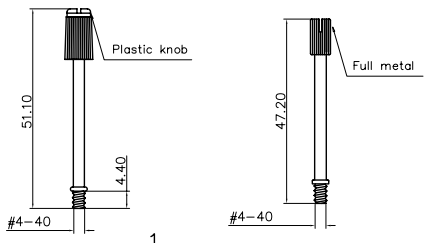

Cable strain relief

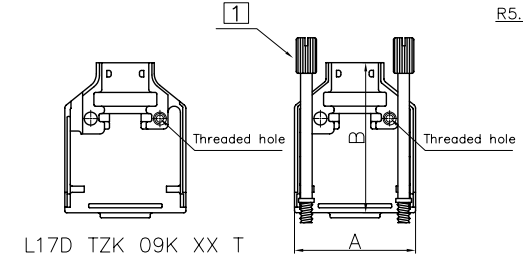

Thumb screw



Screw

Part Number	A	B	Part Number
L17D TZK 09K FM T	31 (1.220")	38.3 (1.508")	L17D TZK 09K T
L17D TZK 15K FM T	39.5 (1.555")	40.5 (1.594")	L17D TZK 15K T
L17D TZK 25K FM T	53.4 (2.102")	48.2 (1.897")	L17D TZK 25K T
L17D TZK 37K FM T	70 (2.755)	52.2 (2.055")	L17D TZK 37K T

Customer drawing


REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1			06/06/08	

D-SUB TECHNICAL DATA

Material and finish:
 Shell: die-cast, nickel plated
 Thumb screws: with metal knob, nickel plated
 Screws: Steel, blue chromate plating, Philips head
 Cable strain relief: Plastic UL94 V-0
 Temperature range: -40°C to 120°C
 Cable diameter: 4.0-13.0mm
 Attenuation factor: >40 dB between 30 MHz and 1 GHz

PRODUCT CODE

L 17DTZK XX K XX T

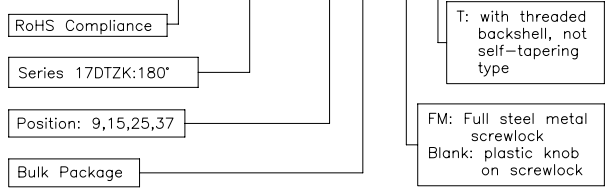

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE
U.S.	METRIC	DRAWN	Summa	06/06/08
X +/-	0.50	CHECKED	tk.wong	06/06/08
XX +/-	0.30			
XXX +/-	0.20			
FRACTIONS +/-	2'			
ANGLES +/-				

FOR MATERIALS AND FINISHES SEE NOTES

REMOVE SHARP EDGES

DIMENSIONS IN INCHES

ANGLE OF PROJECTION

SCALE NONE

Amphenol®	
TITLE Metal Hood DTZK series	
SIZE A4	DRAWING NO. C L17D TZK XXX XX T
SCALE NONE	REV. 1
SHEET 1 OF 4	

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent. It and no right is granted to disclose or to use any information in this document.


REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1			06/06/08	

D-SUB TECHNICAL DATA

Material and finish:
 Shell: die-cast, nickel plated
 Thumb screws: with metal knob, nickel plated
 Screws: Steel, blue chromate plating, Philips head
 Cable strain relief: Plastic UL94 V-0
 Temperature range: -40°C to 120°C
 Cable diameter: 4.0-13.0mm
 Attenuation factor: >40 dB between 30 MHz and 1 GHz


PRODUCT CODE

L 17DTZK XX K XX T

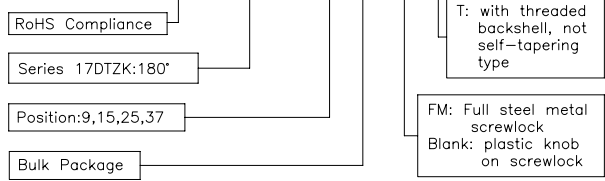

UNLESS OTHERWISE SPECIFIED	APPROVAL		DATE
TOLERANCES			
	U.S.	METRIC	
X	+/-	0.50	DRAWN <i>Suming Li</i> 06/06/08
.XX	+/-	0.30	CHECKED <i>lik.wong</i> 06/06/08
.XXX	+/-	0.20	
FRACTIONS	+/-		
ANGLES	+/-	2'	
FOR MATERIALS AND FINISHES SEE NOTES			
REMOVE SHARP EDGES	DRAWING FILE :		
DIMENSIONS		ANGLE OF PROJECTION	
INCHES		FIRST ANGLE	
MILLIMETER		MM	

Amphenol®		
TITLE Metal Hood DTZK series		
SIZE	DRAWING NO.	REV.
A4	C L17D TZK XXX XX T	1
SCALE	NONE	SHEET 2 OF 4

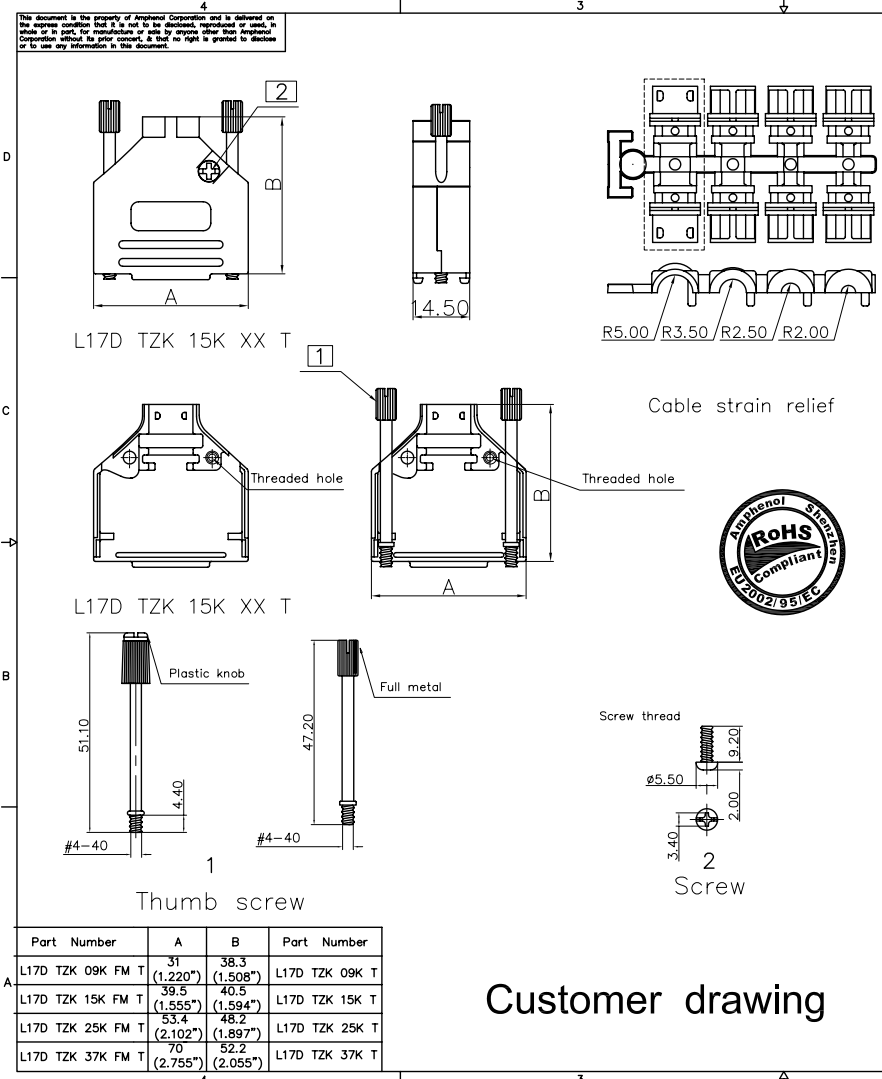

Part Number	A	B	Part Number
L17D TZK 09K FM T	31 (1.220")	38.3 (1.508")	L17D TZK 09K T
L17D TZK 15K FM T	39.5 (1.555")	40.5 (1.594")	L17D TZK 15K T
L17D TZK 25K FM T	53.4 (2.102")	48.2 (1.897")	L17D TZK 25K T
L17D TZK 37K FM T	70 (2.755")	52.2 (2.055")	L17D TZK 37K T

Customer drawing

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent. All right is granted to disclose or to use any information in this document.

REVISIONS




SYM	ECN	DESCRIPTION	DATE	APPROVED
1			06/06/08	

D-SUB TECHNICAL DATA

Material and finish:
 Shell: die-cast, nickel plated
 Thumb screws: with metal knob, nickel plated
 Screws: Steel, blue chromate plating, Philips head
 Cable strain relief: Plastic UL94 V-0
 Temperature range: -40°C to 120°C
 Cable diameter: 4.0-13.0mm
 Attenuation factor: >40 dB between 30 MHz and 1 GHz

PRODUCT CODE

L 17DTZK XX K XX T

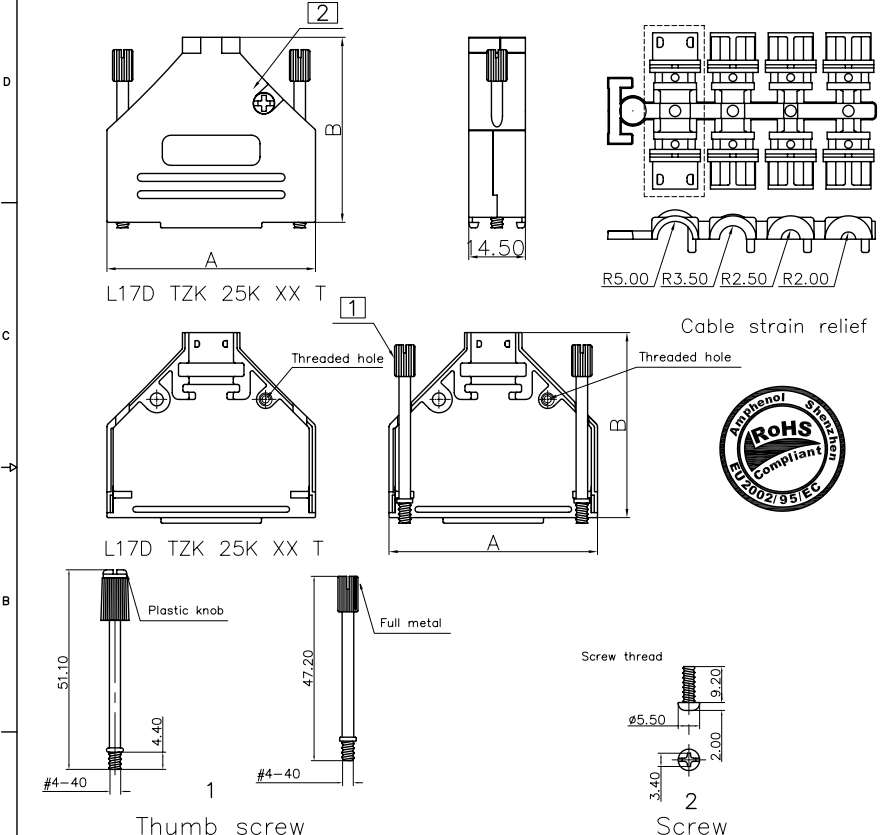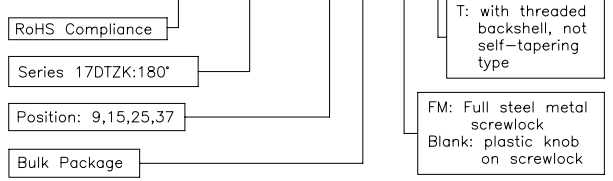


Part Number	A	B	Part Number
L17D TZK 09K FM T	31 (1.220")	38.3 (1.508")	L17D TZK 09K T
L17D TZK 15K FM T	39.5 (1.555")	40.5 (1.594")	L17D TZK 15K T
L17D TZK 25K FM T	53.4 (2.102")	48.2 (1.897")	L17D TZK 25K T
L17D TZK 37K FM T	70 (2.755")	52.2 (2.055")	L17D TZK 37K T

Customer drawing


UNLESS OTHERWISE SPECIFIED	APPROVAL	DATE
TOLERANCES	DRAWN	06/06/08
U.S.	Summa	
METRIC	CHECKED	06/06/08
X +/- 0.50	CHECKED	06/06/08
.XX +/- 0.30		
.XXX +/- 0.20		
FRACTIONS +/-		
ANGLES +/-		
2'		
FOR MATERIALS AND FINISHES	DRAWING FILE :	
SEE NOTES		
REMOVE SHARP EDGES	ANGLE OF PROJECTION	
DIMENSIONS		
U.S.		
INCHES		
METRIC		
MM		

Amphenol®		
TITLE		
Metal Hood DTZK series		
SIZE	DRAWING NO.	REV.
A4	C L17D TZK XXX XX T	1
SCALE	NONE	SHEET 3 OF 4


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent. All rights are granted to disclose or to use any information in this document.




L17D TZK 37K XX T

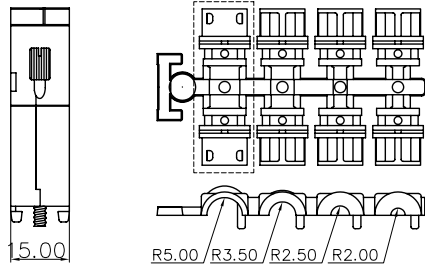


Cable strain relief

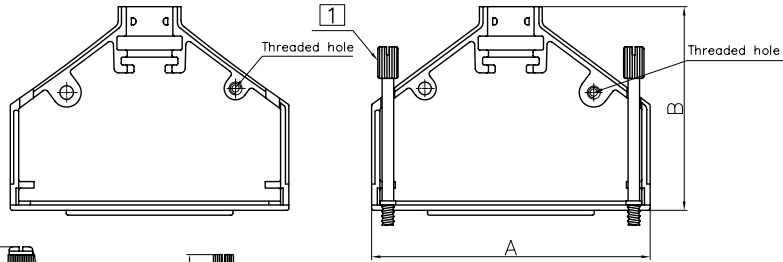

L17D TZK 37K XX T

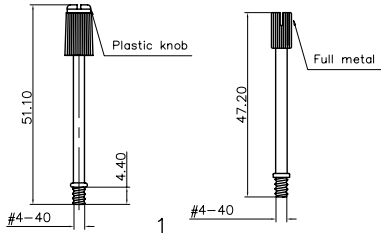

Thumb screw



Screw



Part Number	A	B	Part Number
L17D TZK 09K FM T	31 (1.220")	38.3 (1.508")	L17D TZK 09K T
L17D TZK 15K FM T	39.5 (1.555")	40.5 (1.594")	L17D TZK 15K T
L17D TZK 25K FM T	53.4 (2.102")	48.2 (1.897")	L17D TZK 25K T
L17D TZK 37K FM T	70 (2.755")	52.2 (2.055")	L17D TZK 37K T

Customer drawing

REVISIONS

SYM	ECN	DESCRIPTION	DATE	APPROVED
1			06/06/08	

D-SUB TECHNICAL DATA

Material and finish:
 Shell: die-cast, nickel plated
 Thumb screws: with metal knob, nickel plated
 Screws: Steel, blue chromate plating, Philips head
 Cable strain relief: Plastic UL94 V-0
 Temperature range: -40°C to 120°C
 Cable diameter: 4.0-13.0mm
 Attenuation factor: >40 dB between 30 MHz and 1 GHz

PRODUCT CODE

L 17DTZK XX K XX T

RoHS Compliance

Series 17DTZK:180°

Position:9,15,25,37

Bulk Package

T: with threaded backshell, not self-tapering type

FM: Full steel metal screwlock
 Blank: plastic knob on screwlock

UNLESS OTHERWISE SPECIFIED	APPROVAL	DATE
TOOLERANCES	DRAWN Suming IA	06/06/08
U.S. METRIC	CHECKED ikk.wong	06/06/08
X +/- 0.50		
XX +/- 0.30		
XXX +/- 0.20		
FRACTIONS +/-		
ANGLES +/-		
2'		
FOR MATERIALS AND FINISHES	DRAWING FILE :	
SEE NOTES		
REMOVE SHARP EDGES	ANGLE OF PROJECTION	
DIMENSIONS		
U.S. INCHES		
METRIC MM		

Amphenol®		
TITLE Metal Hood DTZK series		
SIZE	DRAWING NO.	REV.
A4	C L17D TZK XXX XX T	1
SCALE	NONE	SHEET 4 OF 4