


Fig. 1

- Standard solder tail receptacles can be mounted as a low profile receptacle or by the solder tail for use in smaller diameter holes.
- Series 712 uses MM #0255 pins. See page 136 for details.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 218 for details.
- Insulators are high temp. thermoplastic.

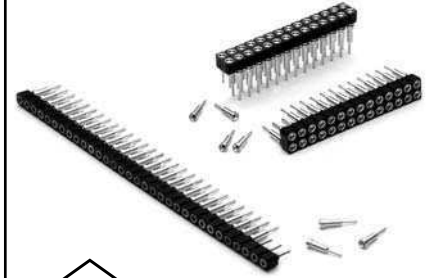

Ordering Information

| | |
|---------------|--|
| Fig. 1 | Single Row (0,71 OR 1,4 min. mounting holes) |
| | <p>712-XX-1__-41-001000</p> <p>Specify # of pins → 01-64</p> |
| Fig. 2 | Double Row (0,71 OR 1,4 min. mounting holes) |
| | <p>712-XX-2__-41-001000</p> <p>Specify # of pins → 02-64</p> |

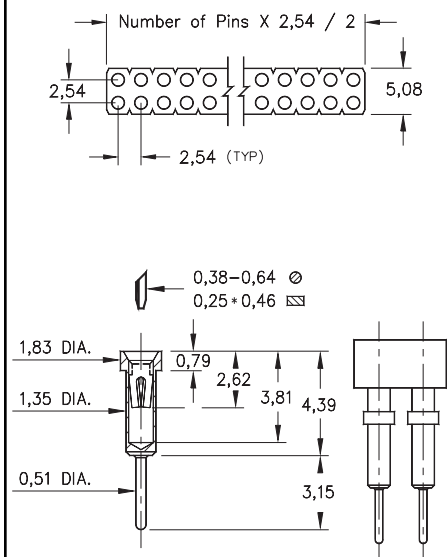


Fig. 2

For Electrical, Mechanical & Environmental Data, See pg. 4

XX=Plating Code See Below

For RoHS compliance select \diamond plating code.

| | | | |
|--------------------------|-----------------|--------------------|-----------------|
| SPECIFY PLATING CODE XX= | 13 \diamond | 93 | 43 \diamond |
| Sleeve (Pin) | 0,25 μ m Au | 5,08 μ m Sn/Pb | 5,08 μ m Sn |
| Contact (Clip) | 0,76 μ m Au | 0,76 μ m Au | 0,76 μ m Au |