


- Special lock-down feature prevents floating of socket during soldering.
- Open insulator with ladder construction.
- Sockets are XY stackable.
- Socket pins feature closed end construction eliminating any solder wicking problems.

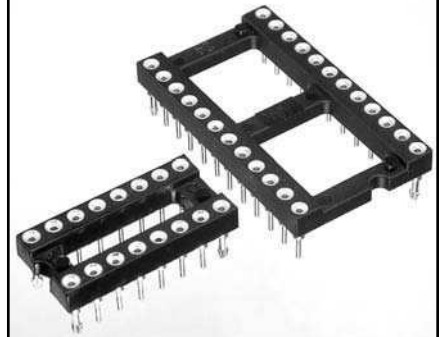

Total number of pins	Pin Spacing			Quantity per tube	Ordering Information
	A	B	C		

Total number of pins	A	B	C	Quantity per tube
6	0.3	0.3	0.4	67
8	0.4	0.3	0.4	50
14	0.7	0.3	0.4	28
16	0.8	0.3	0.4	25
18	0.9	0.3	0.4	22
20	1.0	0.3	0.4	20
24	1.2	0.3	0.4	16
28	1.4	0.3	0.4	14
22	1.1	0.4	0.5	18
24	1.2	0.6	0.7	16
28	1.4	0.6	0.7	14
32	1.6	0.6	0.7	12
40	2.0	0.6	0.7	10
48	2.4	0.6	0.7	8
64	3.2	0.9	1.0	6

**XX= Plating Code
See Below**

For RoHS compliance, select \diamond plating code. For the all gold option (XX=13) also change part number from 101-XX-XXX-41-56X000 to 101-13-XXX-41-56X100



101-XX-306-41-56X000
101-XX-308-41-56X000
101-XX-314-41-56X000
101-XX-316-41-56X000
101-XX-318-41-56X000
101-XX-320-41-56X000
101-XX-324-41-56X000
101-XX-328-41-56X000
101-XX-422-41-56X000
101-XX-624-41-56X000
101-XX-628-41-56X000
101-XX-632-41-56X000
101-XX-640-41-56X000
101-XX-648-41-56X000
101-XX-964-41-56X000

Clinch Pins:
Two Opposite Corner Pins **X = 0**
Four Corner Pins **X = 8**

SPECIFY PLATING CODE XX=	13 \diamond	93	43 \diamond
Sleeve (Pin)	10 μ " Au	200 μ " Sn/Pb	200 μ " Sn
Contact (Clip)	30 μ " Au	30 μ " Au	30 μ " Au

Downloaded from Datasheet.su