

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0740313001](#)
Status: **Active**
Overview: [vhdm_h](#)
Description: 2.00mm (.079") Pitch VHDM® Board-to-Board Daughter card Receptacle, Right Angle, 6 Circuits, 6-Row, Tin/Lead

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)


General

Product Family	Backplane Connectors
Series	74031
Application	Daughtercard
Component Type	PCB Receptacle
Overview	vhdm_h
Product Name	VHDM® - H Series
Style	N/A

Physical

Circuits (Loaded)	6
Circuits (maximum)	6
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Guide to Mating Part	No
Keying to Mating Part	None
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin-Lead
Material - Resin	High Temperature Thermoplastic
Number of Columns	1
Number of Pairs	Open Pin Field
Number of Rows	6
Orientation	Right Angle
PC Tail Length (in)	0.072 In
PC Tail Length (mm)	1.83 mm
PCB Locator	No
PCB Retention	None
PCB Thickness Recommended (in)	0.062 In
PCB Thickness Recommended (mm)	1.57 mm
Packaging Type	Tray
Pitch - Mating Interface (in)	0.079 In
Pitch - Mating Interface (mm)	2.00 mm
Pitch - Term. Interface (in)	0.089 In
Pitch - Term. Interface (mm)	2.25 mm
Plating min: Mating (µin)	30
Plating min: Mating (µm)	0.75
Plating min: Termination (µin)	30
Plating min: Termination (µm)	0.75
Polarized to PCB	Yes
Stackable	Yes
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-55°C to +85°C
Termination Interface: Style	Through Hole - Compliant Pin

Electrical

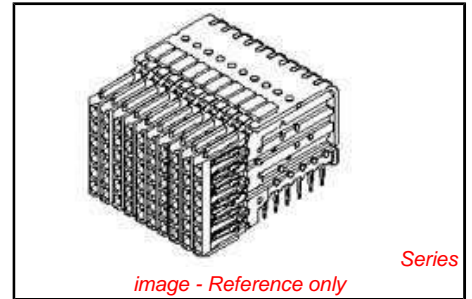

EU RoHS **China RoHS**

RoHS Compliant by Exemption

REACH SVHC

Not Reviewed

Halogen-Free

Status

Halogen-Free

Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.



Search Parts in this Series
[74031Series](#)

Current - Maximum per Contact	1A
Data Rate	6.25 Gbps
Real Signals (per 25mm)	75
Voltage - Maximum	120V AC (RMS)/DC

Material Info

Reference - Drawing Numbers







Sales Drawing SD-74031-005

VHDM and Very High Density Metric are trademarks of Amphenol Corporation

This document was generated on 05/19/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

WAFER NUMBER	CONTACT PLATING DESCRIPTION	WAFER PLASTIC COLOR	TAIL PLATING DESCRIPTION
74031-3001	30µN GOLD	BLACK	TIN/LEAD
74031-3051	50µN GOLD W/LUBE	GRAY	TIN/LEAD
74031-4001	30µN GOLD	BLACK	MATTE TIN

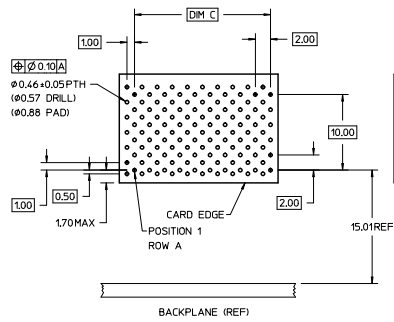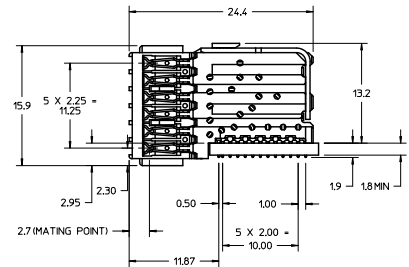

NUMBER OF SIGNAL WAFERS	A	C
10	20.0	18.00
25	50.0	48.00

- NOTES:
1. MATERIALS: HOUSING - LCP, GLASS FILLED, UL94V-0, TERMINALS - HIGH PERFORMANCE COPPER ALLOY.
 2. FINISH: SELECTIVE GOLD IN CONTACT AREA, SELECTIVE TIN/LEAD OR MATTE TIN ON PCB TAILS NICKEL OVERALL.
 3. REFER TO MOLEX PRODUCT SPECIFICATION PS-74031-999 FOR PERFORMANCE SPECIFICATIONS.
 4. SIGNAL WAFERS SUPPLIED ON STAINLESS STEEL STIFFENER ON CUSTOM DC LAYOUTS ONLY.

INITIAL RELEASE E.C. MO. 4/22/09 DRAWN: JONIAK 20/00/05 CHKD: MELTON 20/00/08 APPR: SMILLER 20/00/09	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE MM ONLY	SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
	$\nabla=0$ $\nabla=0$ $\nabla=0$	4 PLACES ±--- INCH 3 PLACES ±--- INCH 2 PLACES ±.25 INCH 1 PLACE ±0.38 INCH ANGULAR ±1/2°	DRAWN BY: SDANNELLEY CHECKED BY: J. MELTON APPROVED BY: SMILLER DATE: 2010/02/26 DATE: 2010/02/26 DATE: 2010/03/09	TITLE VHDM-H 6R DAUGHTERCARD SIGNAL WAFER SALES DRAWING	MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-74031-005	SHEET NO. 1 OF 1
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	MOLEX INCORPORATED						