

SAW Filter for Land Mobile Radio System


For Industrial Use

■ Features

- A filter with low insertion loss.
- Compact and light.

Pb Free


RoHS Compliant
Directive 2002/95/EC

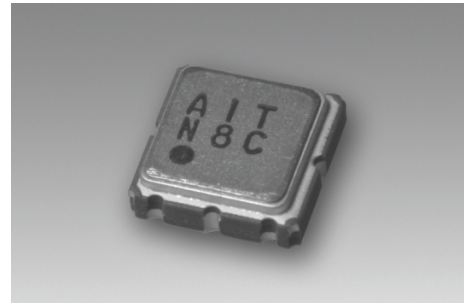

■ Specifications

Model	WF995C0365CD		
Item	min.	typ.	max.
Nominal frequency : f ₀ (MHz)	-	365	-
Maximal insertion loss (dB) at 360 to 370 MHz	-	2.0	3.0
Pass-band ripple (dB) at 360 to 370 MHz	-	0.8	2.0
VSWR at 360 to 370 MHz	-	1.7	2.0
Guaranteed attenuation (dB) (from the throughlevel)	325.8 MHz	27	60
	325.8 to 355 MHz	10	35
	378 to 400 MHz	10	20
	431 to 452 MHz	27	60
Operating temperature range (°C)	-30 to +70		
Terminating impedance (Ω)	50		

■ Dimensions

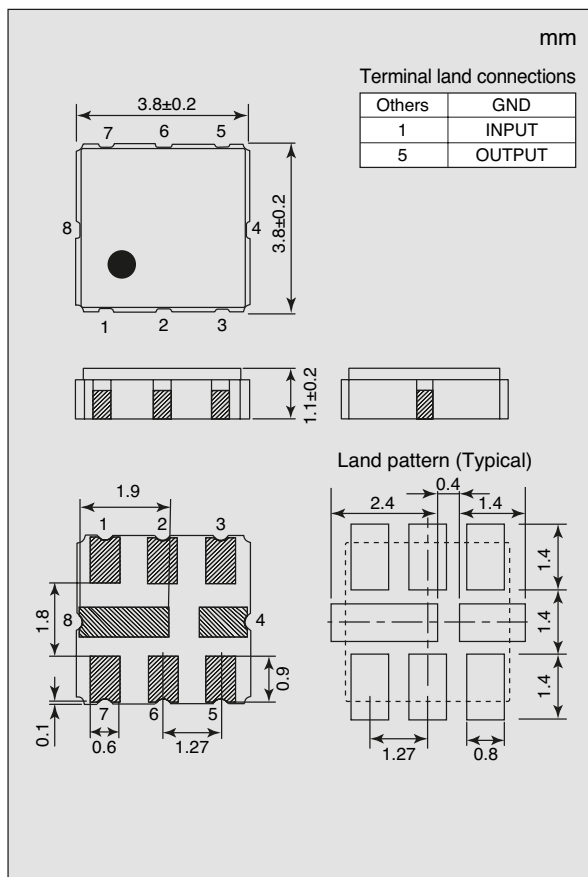

■ Characteristics

