

SAW Filter for ISDB-T


For Industrial Use

■ Features

- SAW filter with double notches.
- Compact and light. (1.4x1.1x0.5mm)
- Low loss and high attenuation.

Pb Free

RoHS Compliant
Directive 2002/95/EC

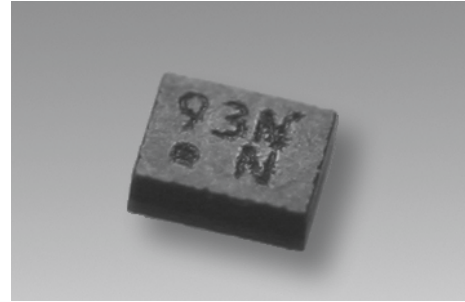

■ Specifications

Model	WFA63D0827FF			
Item		min.	typ.	max.
Passband width (MHz)		470	-	770
Maximal insertion loss (dB)	470 to 710 MHz	-	1.4	1.8
	710 to 770 MHz	-	2.0	2.5
Return loss (dB)	470 to 710 MHz	10	17	-
	824 to 830 MHz	40	43	-
Guaranteed attenuation (dB) (from the throughlevel)	898 to 925 MHz	40	42	-
	1920 to 1980 MHz	35	44	-
Operating temperature range (°C)		-25 to +85		
Terminating impedance (Ω)		50		

■ Dimensions

