

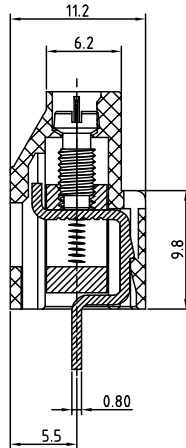


N=NUMBER OF POLES

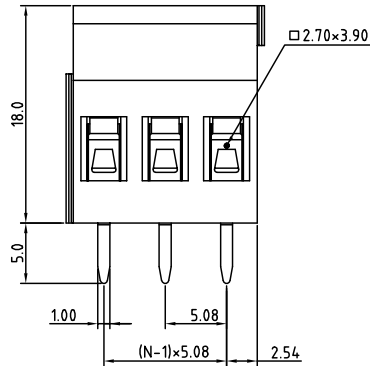

P.C.B LAYOUT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Terminal body (metal housing): Brass(CuZn)
- Terminal screw: Steel Zinc plating "-" slot type
- Contacts: Brass
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 15A
- Wire range: Solid wire(AWG): 12-30
Stranded wire(AWG): 12-30
- Torque(Lb-In): 4.3
- Screw: M2.5
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:

RoHS Compliant

PART NUMBER:

OSTEKXX2150

No. of Poles 02: 2 Poles 03: 3 Poles 24: 24 Poles	COLOR 0: Black 5: Green (Standard) 6: Blue 8: Grey
--	--



TITLE		OSTEK 5.08mm Series	
PART NO.	OSTEKXX2150	DWG NO.	OSTEKXX2150.DWG
APPROVED	CHECKED	DESIGNED	DRAWN
Shi Jun 2006.10.23	Shi Jun 2006.10.23	Aaron 2006.10.23	Aaron 2006.10.23
SHEET: 01/01		UNIT: mm SCALE: NONE	
REV: B		Tolerance X. ±0.50 X.X ±0.30 X.XX ±0.10 X" ±1"	