


# S2AB thru S2MB

## SURFACE MOUNT STANDARD RECOVERY RECTIFIER

VOLTAGE - 50 TO 1000 VOLTS CURRENT - 2.0 AMPERES



SMB/DO-214AA

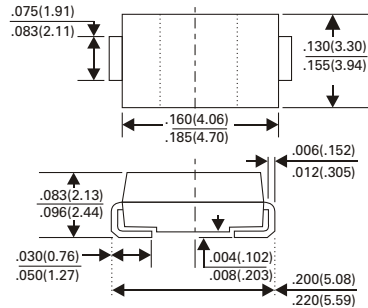

Dimensions in inches and (millimeters)

### FEATURES

- For surface mount applications
- Glass passivated junction
- Low profile package
- Built-in strain relief
- Easy pick and place
- Low forward voltage drop
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- High temperature soldering : 250°C/10 seconds at terminls

### MECHANICAL DATA

Case : JEDEC DO-214AA molded plastic  
 Terminals : Solder plated, solderable per MIL-STD-202, Method 208  
 Polarity : Color band denotes cathode end  
 Standard Package : 12mm tape (EIA STD EIA-481)  
 Weight : 0.003 ounce, 0.093gram

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified  
 Single phase, half wave, 60Hz, resistive or inductive load  
 For capacitive load, derate current by 20%

	SYMBOL	S2AB	S2BB	S2DB	S2GB	S2JB	S2KB	S2MB	UNITS
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current at $T_L = 100^\circ\text{C}$	$I_{(AV)}$	2.0							Amps
Peak Forward Surge Current 8.3mm Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method)	$I_{FSM}$	50							Amps
Maximum Instantaneous Forward Voltage at 2.0A	$V_F$	1.1							Volts
Maximum DC Reverse Current $T_A = 25^\circ\text{C}$ at Rated DC Blocking Voltage $T_A = 125^\circ\text{C}$	$I_R$	5 125							$\mu\text{A}$
Typical Junction Capacitance (NOTE 1)	$C_J$	30							pF
Maximum Thermal Resistance (NOTE 2)	$R_{\theta JA}$ $R_{\theta JL}$	53 16							$^\circ\text{C} / \text{W}$
Operating and Storage Temperature Range	$T_J$ $T_{STG}$	-55 to +150							$^\circ\text{C}$

NOTES :

1. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts
2. The thermal resistance from junction to ambient and junction to lead P.C.B. mounted on 0.27x0.27" (7.0x7.0mm) copper pad areas

# S2AB thru S2MB

## SURFACE MOUNT STANDARD RECOVERY RECTIFIER

### RATINGS AND CHARACTERISTIC CURVES S2AB THRU S2MB

Fig. 1 - FORWARD CURRENT DERATING CURVE

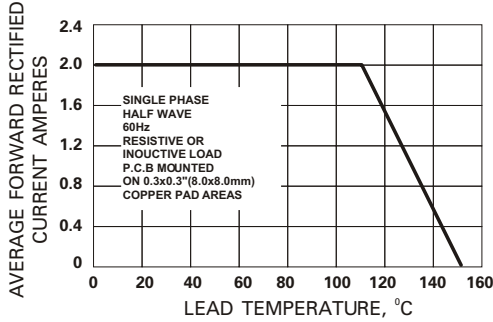


Fig. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

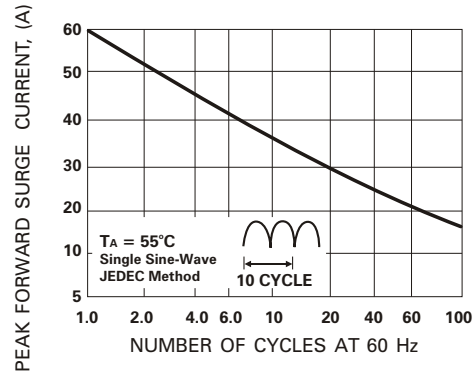


Fig. 3 - TYPICAL REVERSE CHARACTERISTICS

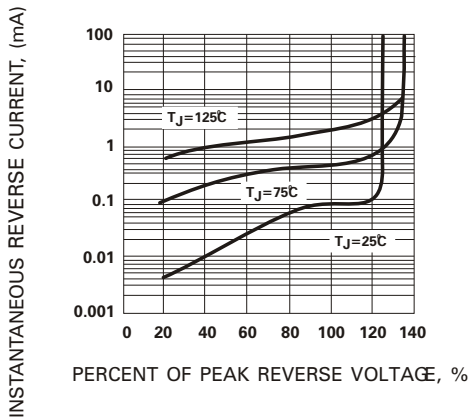


Fig. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

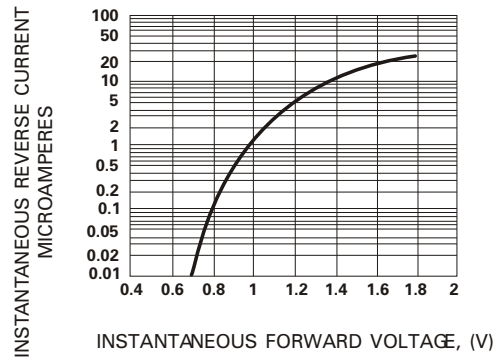


Fig. 5 - TRANSIENT THERMAL IMPEDANCE

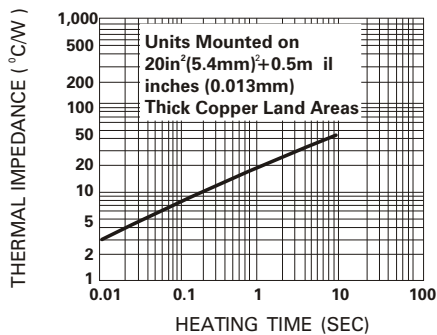


Fig. 6 - TYPICAL JUNCTION CAPACITANCE

