


BS,C ,200178,002,07

GEN. ST.	01	02	03	04	05	06	07	08	0D	50	60	70	80	90	REV.	DATE	DESCRIPTION	BY	C'K'D'																			
INT. ST.	10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	75	76	81	82	83	84	88	04	08/03/00	TABLE UPDATED WITH CATALOG	K.N			
																																	05	06/24/03	ADD 'S30' PLATING	R.Ch		
																																		06	09/01/03	MODIFICATION DESCRIPTION 'S30' PLATING	R.Ch	
																																		07	22/01/04	MODIFICATION DESCRIPTION 'D70' PLATING DELETE 'S30' PLATING'	R.Ch	

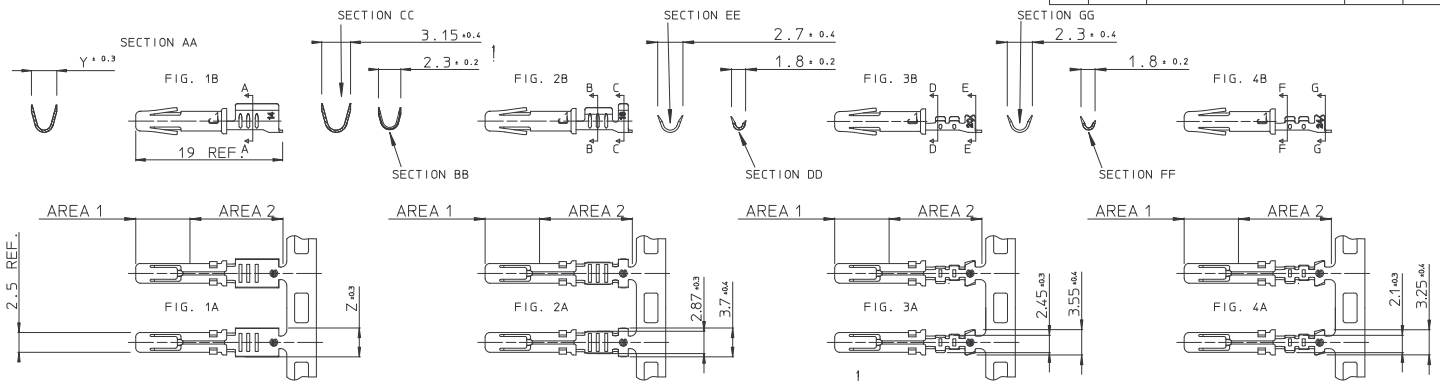

FEMALE CONTACT CAT. N°.	FIG.	Z	Y	WIRE SIZE		WIRE INSUL. DIAM. IN MM.	WIRE STRIP LENGTH IN MM.	HAND CRIMP M8ND/Y8ND DIE SET	TOOLING HANDTOOL FOR LOOSE PIECE	AUTOMATIC LEFT SIDE APPLICATOR (NOT INCLUDED)	CRIMP TOOLING STRIPPER UNIT	EXTRACTION TOOL
				AWG	MM²							
SC24M1* SC24ML1*	4A 4B			26/24	0.13/0.25	0.89/1.58	4.0	N24RT11	Y16SCM2	MLS0318B		
SC20M1* SC20ML1*	3A 3B			22/20	0.35/0.50	1.17/2.08	4.0	N20RT29		MLS0555A		
SC16M11* SC16ML11*	2A 2B			18/16	0.80/1.50	3.0	4.65	N16RT26	Y14SCM	MLS0356A	SC10S1	RX2025GE1
SC16M1* SC16ML1*	1A 1B	2.87	2.3	18/16	0.80/1.50	2.0/3.0	6.35	N16RT24		MLS1579		
SC14M1* SC14ML1*	1A 1B	3.3	3.3	14	2.0	3.0	6.35	N14RT13		MLS1047		

CONSTRUCTION

CONTACT BODY : HIGH CONDUCTIVITY COPPER ALLOY.
 OUTER SPRING : STAINLESS STEEL.
 * PLATING : S6 = 0.75 µ GOLD MIN. OVER 2 µ Ni (AREA 1)
 : GOLD FLASH OVER 2 µ Ni (AREA 2)
 : D70 = GOLD FASH OVER 2 µ Ni (AREA 1)
 : TK6 = 2-5 µ Sn PRE-PLATED (AREA 1 + AREA 2)

PACKING CONTACTS ON STRIP : 3000 PCS. PER REEL. E.G. SC16M11*
 PACKING LOOSE PIECE CONTACTS : 100 PCS PER STD. PACKING. E.G. SC16ML11*
 CONNECTOR ACCOMMODATION

THESE CONTACTS CAN BE USED IN ANY CONTACT POSITION IN ANY CONNECTOR IN THE TRIM TRIO INTERCONNECTION SYSTEM : MSM RECTANGULAR CONN., SMS QIKMATE CONN., UT BANTAM CONN. AND METALOK BANTAM CONN..

THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY. NOT USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT. AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE

DIT IS ONZE EIGENDOM EN MAG NIET NAGEMAKT. HEROPKRIJFT OVERGEMAKT AAN DERDEN. NIET VOOR FABRIKATIE GEBRUIKT WORDEN. ZONDER ONZE SCHRIFTELIJKE TOELATING. BIJ NIET GEBRUIK IS TERUGSENDING VERPLICHT.

PERFORMANCE CHARACTERISTICS

CURRENT RATING : 13 A
 CONTACT RESISTANCE : ≤ 6 m Ohm
 OPERATING VOLTAGE : 750 V RMS
 CONTACT RETENTION IN BODY : 65 N MIN.
 INDIVIDUAL INSERTION FORCE : 3.5 N MAX.
 INDIVIDUAL WITHDRAWAL FORCE : 0.55 N MIN.

RELEASED FOR PRODUCTION

1DEC ±0.2 1DEC 2DEC ±0.1 2DEC ANGLES ±1° HOEKEN	APPR. DRAFT CHECKED	DATE 11-06-86	SIGN. R.Verbeek	FEMALE FORMED TWO PIECE CONTACT CAT. No. SC--M--
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.	PROD. MGR. PR. ENG. MGR. PR. MGT. MGR.			SOURIAU Route Nationale 23 72470 CHAMPAGNE
ALL DIMENSIONS IN MM ALLE AFMETINGEN IN MM	REFERENCES / REFERENTIES			SCALE
				BS,C ,200178,002,07 DRAWING No. CUSTOMER DRAWING

8 7 6 5 4 3 2 1