




SPC
TECHNOLOGY

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.
SPC-F005.DWG

REVISIONS

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
			AMU	03-08-10	MRE	07-08-10	XXX	17-08-10

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

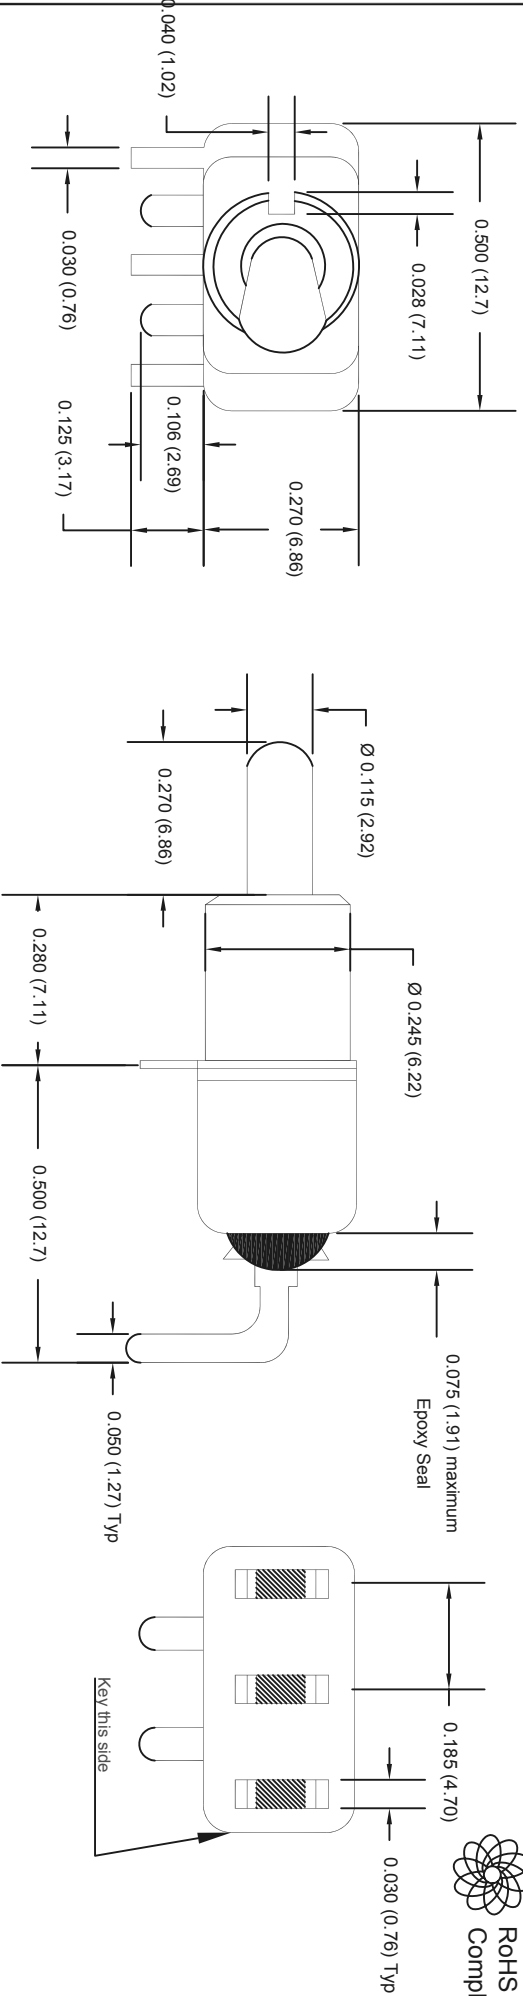


NOTES:

- Rating: 0.4 Volt-Amps (VA) maximum at 20V maximum AC or DC
- Contact Material:
Contact Surface: Brass with gold plate over nickel plate
Body: Brass with gold plate over nickel plate
- Center Terminal:
Contact Surface: Brass with gold plate over nickel plate
Body: Brass with gold plate over nickel plate
- Electrical Life: 50,000 make-and-break cycles at full load
- Contact Resistance:
10 milliohm maximum
Initial at 2 to 4 VDC, 100 millamp
- Operating Temperature: -30°C to 85°C
- Toggle Handle: Brass, chrome plated
- Bushing: Brass, nickel plated
- Housing: Stainless Steel
- Case: Melamine or diallyl phthalate (DAP)
- UL Listed
- Insulation Resistance: 1000 Megohms minimum
- Dielectric Strength: 1000 V RMS at sea level.

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:


UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.



Part Number Table

Description	Part Number
PC Mounted Toggle Switch - SPDT	SPC21250

Dimensions : Inches (mm)

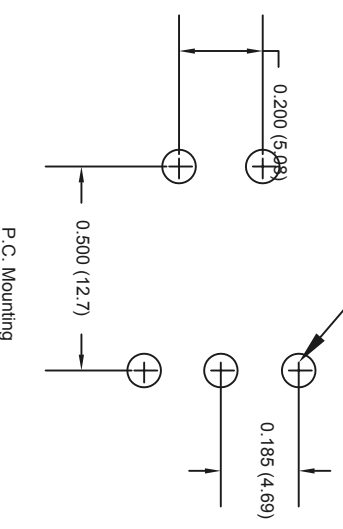

DRAWING TITLE:
PC Mounted Toggle Switch - SPDT

DRAWN BY:	AMU	DATE:	03-08-10	SIZE:	XXX	DWG. NO.:	XXX	ELECTRONIC FILE:	50N344	REV:	A
CHECKED BY:	MRE	DATE:	07-08-10	SCALE:	NTS	U.O.M.:	INCHES [mm]	SHEET:	1	OF	1
APPROVED BY:	XXX	DATE:	17-08-10								