



SPC  
TECHNOLOGY




ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS



DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
			AMU	02-08-10	MRE	07-08-10	XXX	16-08-10

DOC. NO. SPC-F005 \* Effective: 7/8/02 \* DCP No: 1398

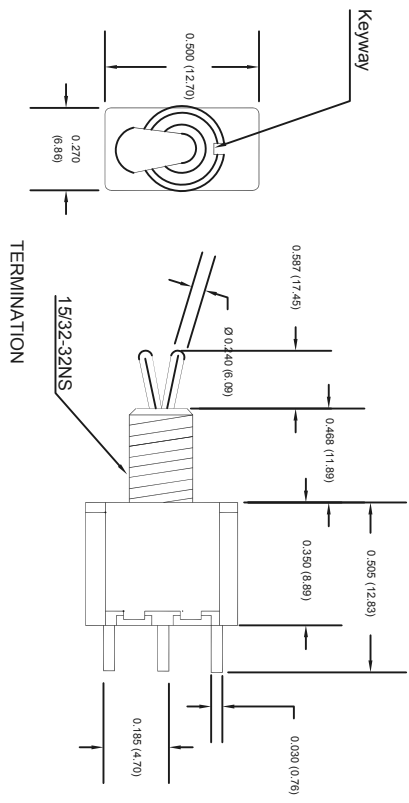

Notes:

- Rating: 5 Amps with resistive load at 120 VAC or 28 VDC
- 2 Amps with resistive load at 250 VAC
- Contact Material: Contact Surface: Coin silver
- Body: Coin silver or silver plated brass
- Center Terminal: Contact Surface: Brass, silver plated
- Body: Brass, silver plated
- Electrical Life: 50,000 make-and-break cycles at full load
- Contact Resistance: 10 milliohm maximum
- Initial at 2 to 4 VDC 100 millilamp
- Operating Temperature: -30°C to 85°C
- UL Listed
- Includes: Hex nut, lock washer and locking ring
- Insulation Resistance: 1000 Mega ohms minimum
- Dielectric Strength: 1000 V RMS at sea level
- Materials: Toggle Handle: Brass, chrome plated
- Bushing: Brass, nickel plated
- Housing: Stainless steel
- Case: Melamine or diallyl phthalate (DAP)

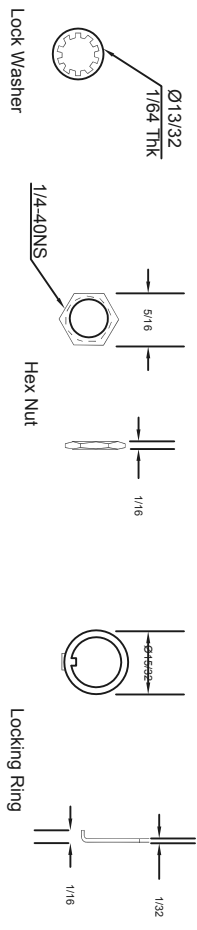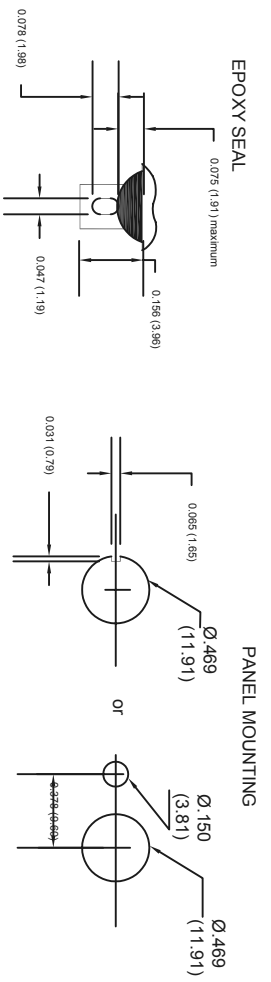

Dimensions : Inches (mm)

Part Number Table

Description	Part Number
Toggle Switch, SPDT	SPC21276

TOLERANCES: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWING TITLE: Toggle Switch, SPDT

DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

DRAWN BY:	DATE:
AMU	02-08-10
CHECKED BY:	DATE:
MRE	07-08-10
APPROVED BY:	DATE:
XXX	16-08-10

SIZE	DWG. NO.	ELECTRONIC FILE
XXX	XXX	50N287
SCALE:	NTS	U.O.M.: INCHES [mm]
SHEET:	1	OF 1