




SPC
TECHNOLOGY

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS		DOC. NO. SPC-F005	* Effective: 7/8/02	* DCP No: 1398				
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
			Veena	06-08-10	Jagan	18-08-10	XXX	20-08-10

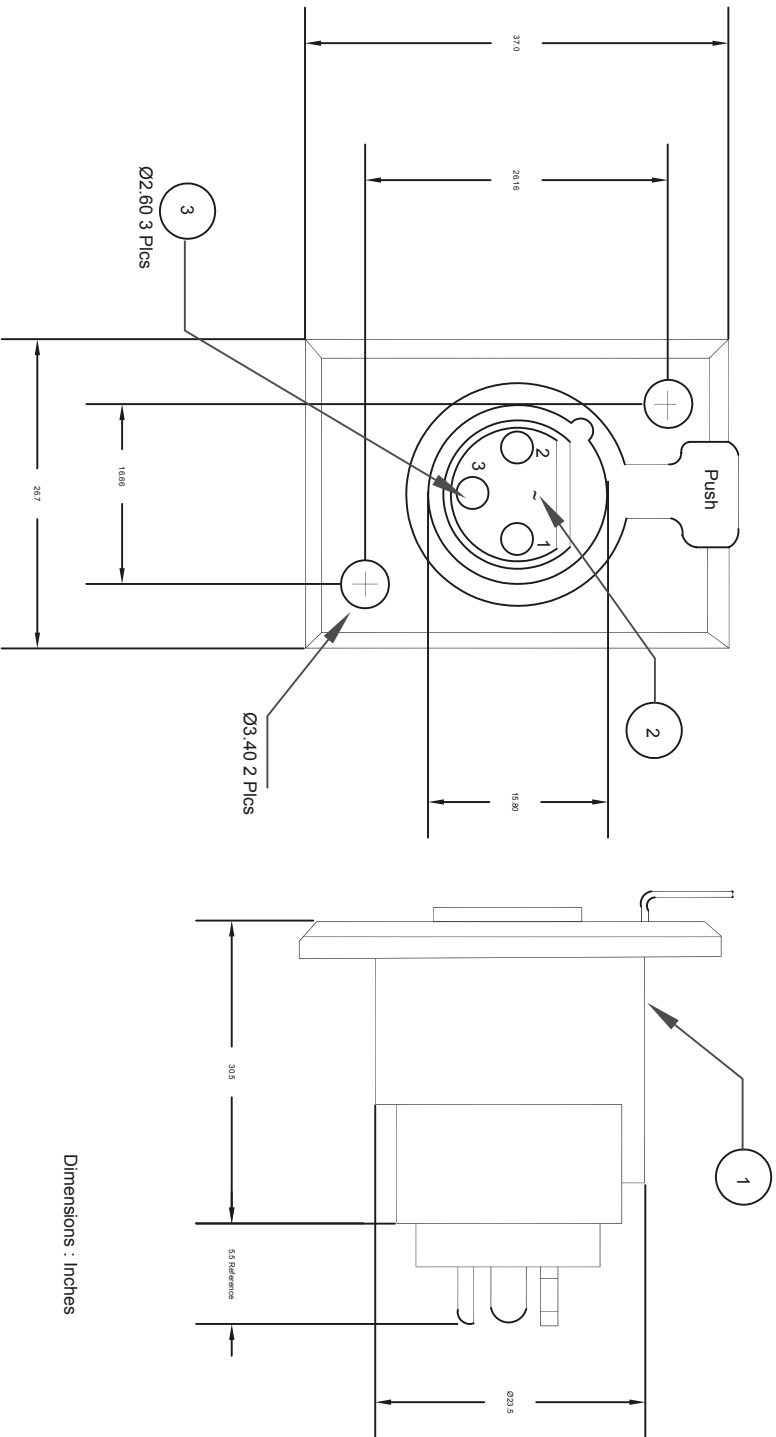

Specifications:

Electrical:

Contact Rating: 15A at 125 VAC
 Contact Resistance: 5 milliohms max.
 Insulation Resistance: 5000 megohms min. at 500 VDC
 Dielectric Strength: 1400 VAC
 Capacitance: 4pF max.

Mechanical:

Insertion Force: 1.0 to 8.0kg
 Withdrawal Force: 1.0 to 8.0kg

Environmental:

Operating Temperature: -55°C to 70°C

Dimensions : Inches

Item	Part	Material/Finish
1	Housing	Zinc Die Cast; Black Finish
2	Insert Insulator	PP0-1, UL94V-0, Gray
3	Socket	Phos, Bronze, Silver Plated

Part Number Table

Description	Part Number
3-Pin XLR Receptacle, Female	SPC21438

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	Veena	DATE:	06-08-10
CHECKED BY:	Jagan	DATE:	18-08-10
APPROVED BY:	XXX	DATE:	20-08-10

DRAWING TITLE: **3-Pin XLR Receptacle, Female**

SIZE	DWG. NO.	ELECTRONIC FILE	REV
XXX	XXX	84N1116	A
SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1

DISCLAIMER:
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.