


Example: I25E - C16

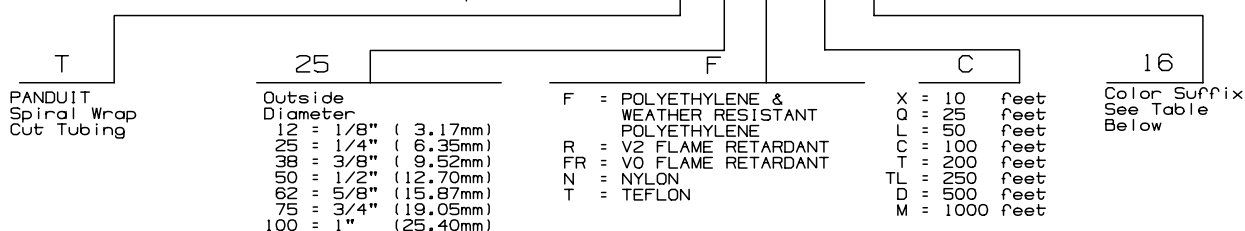

COLOR	COLOR SUFFIX	MATERIAL						
		POLYETHYLENE	WEATHER RESISTANT POLYETHYLENE	FLAME RETARDANT POLYETHYLENE V2 RATING	FLAME RETARDANT POLYETHYLENE V0 RATING	NYLON	WEATHER RESISTANT NYLON	TEFLON
NATURAL (CLEAR)	LEAVE BLANK	X		NATURAL COLOR IS WHITE	NATURAL COLOR IS WHITE	X		X
WEATHER RESISTANT BLACK	0		X				X	
BROWN	1	X						
RED	2							
ORANGE	3	X						
YELLOW	4	X						
GREEN	5	X						
BLUE	6	X						
PURPLE	7	X						
GRAY	8	X						
WHITE	10	X						
PINK	16	X						
BLACK	20			X	X			


"B" Nominal

See Note 3

CAD FILENAME/LAYERS

G00239HA_DC_SPIRA

PANDUIT CORP.

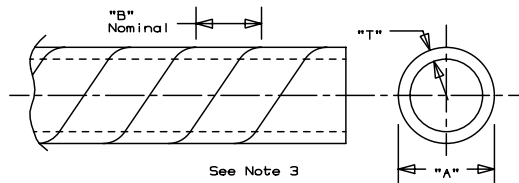

Notes:

1. Refer to Panduit Catalogs for any additional information.
2. For roll sizes larger than 10 ft., splicing may occur. For additional information, contact Product Management at 1-800-777-3300 ext. 7432.
3. Refer to Panduit Catalogs for dimensional data.
4. Colors are stocked for 1/4" and 1/2" Polyethylene. Other sizes available, consult factory.

R	12-4-00	JAD		INITIAL RELEASE	GB0239HA	R				DATE 12-4-00
REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP		CHK'D	

SEE TABLE

DRAWING NO.

GB0239HA

DWG
A
SIZE

CAD FILENAME/LAYERS

G00239HA_DC_SPIRALWRP_00

PANDUIT

CORP.

TINLEY PARK, ILLINOIS

SPIRAL WRAP

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± 0.05 (1.3) (.XXX) ± 0.010 (0.25)
(.XX) ± 0.02 (0.5) ANGLES $\pm 5^\circ$

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY IAD

1AD	MAT'L:
-----	--------

SCALE	NONE
-------	------

DATE 12-1-00

SEE TABLE

DRAWING NO.

	CHK'D
--	-------

DRAWING NO.

GB02294A


GB02294A

DING

A

Spiral Wrapping

Ordering Information — Spiral Wrapping

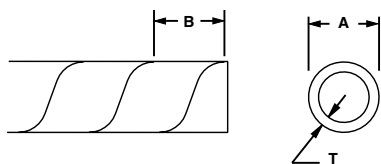




Ordering Information — Spiral Wrapping

Part Number	Material	Color	A In. (mm)	B In. (mm)	T In. (mm)	Bundle Size In. (mm)	Length	Std. Pkg. Qty*
T12F-C	Polyethylene	Natural	0.125" (3.2)	0.218" (5.5)	0.03" (.76)	1/16" (1.6) – 1/2" (12.7)	100' (30.5M)	1 Pkg.
T19F-C		Natural	0.188" (4.8)	0.250" (6.4)	0.035" (0.89)	1/8" (3.2) - 1" (25.4)	100' (30.5M)	1 Pkg.
T25F-X		Natural	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) – 2" (50.8)	10' (3.0M)	1 Pkg.
T25F-C		Natural	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) – 2" (50.8)	100' (30.5M)	1 Pkg.
T25F-C1		Brown	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) – 2" (50.8)	100' (30.5M)	1 Pkg.
T25F-C10		White	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) – 2" (50.8)	100' (30.5M)	1 Pkg.
T25F-C16		Pink	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) – 2" (50.8)	100' (30.5M)	1 Pkg.
T25F-C2		Red	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) – 2" (50.8)	100' (30.5M)	1 Pkg.
T25F-C3		Orange	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) – 2" (50.8)	100' (30.5M)	1 Pkg.
T25F-C4		Yellow	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) – 2" (50.8)	100' (30.5M)	1 Pkg.
T25F-C5		Green	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) – 2" (50.8)	100' (30.5M)	1 Pkg.
T25F-C6		Blue	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) – 2" (50.8)	100' (30.5M)	1 Pkg.
T25F-C7		Purple	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) – 2" (50.8)	100' (30.5M)	1 Pkg.
T25F-C8		Gray	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) – 2" (50.8)	100' (30.5M)	1 Pkg.
T38F-C		Natural	0.375" (9.5)	0.437" (11.1)	0.055" (1.4)	5/16" (7.9) – 3" (76.2)	100' (30.5M)	1 Pkg.
T50F-X		Natural	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) – 4" (101.6)	10' (3.0M)	1 Pkg.
T50F-C		Natural	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) – 4" (101.6)	100' (30.5M)	1 Pkg.
T50F-C1		Brown	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) – 4" (101.6)	100' (30.5M)	1 Pkg.
T50F-C10		White	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) – 4" (101.6)	100' (30.5M)	1 Pkg.
T50F-C16		Pink	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) – 4" (101.6)	100' (30.5M)	1 Pkg.
T50F-C2		Red	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) – 4" (101.6)	100' (30.5M)	1 Pkg.
T50F-C3		Orange	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) – 4" (101.6)	100' (30.5M)	1 Pkg.
T50F-C4		Yellow	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) – 4" (101.6)	100' (30.5M)	1 Pkg.
T50F-C5		Green	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) – 4" (101.6)	100' (30.5M)	1 Pkg.
T50F-C6		Blue	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) – 4" (101.6)	100' (30.5M)	1 Pkg.
T50F-C7		Purple	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) – 4" (101.6)	100' (30.5M)	1 Pkg.
T50F-C8		Gray	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) – 4" (101.6)	100' (30.5M)	1 Pkg.
T62F-C	Weather Resistant Polyethylene	Natural	0.625" (15.9)	0.625" (15.9)	0.062" (1.57)	1/2" (12.7) – 4 1/2" (114.3)	100' (30.5M)	1 Pkg.
T75F-C		Natural	0.75" (19.1)	0.875" (22.2)	0.065" (1.65)	5/8" (15.9) – 5" (127)	100' (30.5M)	1 Pkg.
T100F-C		Natural	1" (25.4)	1.125" (28.6)	0.07" (1.78)	7/8" (22.2) – 6" (152.4)	100' (30.5M)	1 Pkg.
T12F-C0		Black	0.125" (3.2)	0.218" (5.5)	0.03" (.76)	1/16" (1.6) – 1/2" (12.7)	100' (30.5M)	1 Pkg.
T19F-X0		Black	0.188" (4.8)	0.250" (6.4)	0.035" (0.89)	1/8" (3.2) - 1" (25.4)	10' (3.0M)	1 Pkg.
T25F-X0		Black	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) – 2" (50.8)	10' (3.0M)	1 Pkg.
T25F-C0		Black	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) – 2" (50.8)	100' (30.5M)	1 Pkg.
T38F-C0		Black	0.375" (9.5)	0.437" (11.1)	0.055" (1.4)	5/16" (7.9) – 3" (76.2)	100' (30.5M)	1 Pkg.
T50F-X0		Black	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) – 4" (101.6)	10' (3.0M)	1 Pkg.
T50F-C0		Black	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) – 4" (101.6)	100' (30.5M)	1 Pkg.
T62F-C0		Black	0.625" (15.9)	0.625" (15.9)	0.062" (1.57)	1/2" (12.7) – 4 1/2" (114.3)	100' (30.5M)	1 Pkg.
T75F-C0		Black	0.75" (19.1)	0.875" (22.2)	0.065" (1.65)	5/8" (15.9) – 5" (127)	100' (30.5M)	1 Pkg.
T100F-C0		Black	1" (25.4)	1.125" (28.6)	0.07" (1.78)	7/8" (22.2) – 6" (152.4)	100' (30.5M)	1 Pkg.

*Order in multiples of Std. Pkg. Qty.

NOTE: Custom cut-to-length sizes are available upon request. Contact factory for details.

Spiral Wrapping



Ordering Information — Spiral Wrapping

Part Number	Material	Color	A In. (mm)	B In. (mm)	T In. (mm)	Bundle Size In. (mm)	Length	Std. Pkg. Qty*
T12R-C	Flame Retardant Polyethylene (U.L. V2)	White	0.125" (3.2)	0.218" (5.5)	0.03" (.76)	1/16" (1.6) – 1/2" (12.7)	100' (30.5M)	1 Pkg.
T19R-C		White	0.188" (4.8)	0.250" (6.4)	0.035" (0.89)	1/8" (3.2) – 1" (25.4)	100' (30.5M)	1 Pkg.
T25R-C		White	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) – 2" (50.8)	100' (30.5M)	1 Pkg.
T25R-C20		Black	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) – 2" (50.8)	100' (30.5M)	1 Pkg.
T38R-C		White	0.375" (9.5)	0.437" (11.1)	0.055" (1.4)	5/16" (7.9) – 3" (76.2)	100' (30.5M)	1 Pkg.
T50R-C		White	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) – 4" (101.6)	100' (30.5M)	1 Pkg.
T62R-C		White	0.625" (15.9)	0.625" (15.9)	0.062" (1.57)	1/2" (12.7) – 4 1/2" (114.3)	100' (30.5M)	1 Pkg.
T75R-C		White	0.75" (19.1)	0.875" (22.2)	0.065" (1.65)	5/8" (15.9) – 5" (127)	100' (30.5M)	1 Pkg.
T100R-C		White	1" (25.4)	1.125" (28.6)	0.07" (1.78)	7/8" (22.2) – 6" (152.4)	100' (30.5M)	1 Pkg.
T12FR-C	Flame Retardant Polyethylene (U.L. V0)	White	0.125" (3.2)	0.218" (5.5)	0.03" (.76)	1/16" (1.6) – 1/2" (12.7)	100' (30.5M)	1 Pkg.
T12FR-C20		Black	0.125" (3.2)	0.218" (5.5)	0.03" (.76)	1/16" (1.6) – 1/2" (12.7)	100' (30.5M)	1 Pkg.
T19FR-C		White	0.188" (4.8)	0.250" (6.4)	0.032" (0.81)	1/8" (3.2) – 1" (25.4)	100' (30.5M)	1 Pkg.
T19FR-C20		Black	0.188" (4.8)	0.250" (6.4)	0.032" (0.81)	1/8" (3.2) – 1" (25.4)	100' (30.5M)	1 Pkg.
T25FR-C		White	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) – 2" (50.8)	100' (30.5M)	1 Pkg.
T25FR-C20		Black	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) – 2" (50.8)	100' (30.5M)	1 Pkg.
T38FR-C		White	0.375" (9.5)	0.437" (11.1)	0.055" (1.4)	5/16" (7.9) – 3" (76.2)	100' (30.5M)	1 Pkg.
T38FR-C20		Black	0.375" (9.5)	0.437" (11.1)	0.055" (1.4)	5/16" (7.9) – 3" (76.2)	100' (30.5M)	1 Pkg.
T50FR-C		White	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) – 4" (101.6)	100' (30.5M)	1 Pkg.
T50FR-C20		Black	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) – 4" (101.6)	100' (30.5M)	1 Pkg.
T62FR-C		White	0.625" (15.9)	0.625" (15.9)	0.062" (1.57)	1/2" (12.7) – 4 1/2" (114.3)	100' (30.5M)	1 Pkg.
T62FR-C20		Black	0.625" (15.9)	0.625" (15.9)	0.062" (1.57)	1/2" (12.7) – 4 1/2" (114.3)	100' (30.5M)	1 Pkg.
T75FR-C		White	0.75" (19.1)	0.875" (22.2)	0.065" (1.65)	5/8" (15.9) – 5" (127)	100' (30.5M)	1 Pkg.
T75FR-C20		Black	0.75" (19.1)	0.875" (22.2)	0.065" (1.65)	5/8" (15.9) – 5" (127)	100' (30.5M)	1 Pkg.
T100FR-C		White	1" (25.4)	1.125" (28.6)	0.07" (1.78)	7/8" (22.2) – 6" (152.4)	100' (30.5M)	1 Pkg.
T100FR-C20		Black	1" (25.4)	1.125" (28.6)	0.07" (1.78)	7/8" (22.2) – 6" (152.4)	100' (30.5M)	1 Pkg.
T12N-C	Nylon (Black Nylon is weather resistant)	Natural	0.125" (3.2)	0.218" (5.5)	0.015" (.38)	1/16" (1.6) – 1/2" (12.7)	100' (30.5M)	1 Pkg.
T12N-C0		Black	0.125" (3.2)	0.218" (5.5)	0.015" (.38)	1/16" (1.6) – 1/2" (12.7)	100' (30.5M)	1 Pkg.
T19N-C		Natural	0.188" (4.8)	0.250" (6.4)	0.020" (0.51)	1/8" (3.2) – 1" (25.4)	100' (30.5M)	1 Pkg.
T19N-C0		Black	0.188" (4.8)	0.250" (6.4)	0.020" (0.51)	1/8" (3.2) – 1" (25.4)	100' (30.5M)	1 Pkg.
T25N-C		Natural	0.25" (6.4)	0.375" (9.5)	0.023" (.58)	3/16" (4.8) – 2" (50.8)	100' (30.5M)	1 Pkg.
T25N-C0		Black	0.25" (6.4)	0.375" (9.5)	0.023" (.58)	3/16" (4.8) – 2" (50.8)	100' (30.5M)	1 Pkg.
T38N-C		Natural	0.375" (9.5)	0.437" (11.1)	0.03" (.76)	5/16" (7.9) – 3" (76.2)	100' (30.5M)	1 Pkg.
T38N-C0		Black	0.375" (9.5)	0.437" (11.1)	0.03" (.76)	5/16" (7.9) – 3" (76.2)	100' (30.5M)	1 Pkg.
T50N-C		Natural	0.5" (12.7)	0.5" (12.7)	0.032" (.81)	3/8" (9.5) – 4" (101.6)	100' (30.5M)	1 Pkg.
T50N-C0		Black	0.5" (12.7)	0.5" (12.7)	0.032" (.81)	3/8" (9.5) – 4" (101.6)	100' (30.5M)	1 Pkg.
T62N-C		Natural	0.625" (15.9)	0.625" (15.9)	0.035" (.89)	1/2" (12.7) – 4 1/2" (114.3)	100' (30.5M)	1 Pkg.
T62N-C0		Black	0.625" (15.9)	0.625" (15.9)	0.035" (.89)	1/2" (12.7) – 4 1/2" (114.3)	100' (30.5M)	1 Pkg.
T75N-C		Natural	0.75" (19.1)	0.875" (22.2)	0.4" (1.01)	5/8" (15.9) – 5" (127)	100' (30.5M)	1 Pkg.
T75N-C0		Black	0.75" (19.1)	0.875" (22.2)	0.4" (1.01)	5/8" (15.9) – 5" (127)	100' (30.5M)	1 Pkg.
T100N-C		Natural	1" (25.4)	1.125" (28.6)	0.045" (1.0)	7/8" (22.2) – 6" (152.4)	100' (30.5M)	1 Pkg.
T100N-C0		Black	1" (25.4)	1.125" (28.6)	0.045" (1.0)	7/8" (22.2) – 6" (152.4)	100' (30.5M)	1 Pkg.
T12T-C	PTFE‡	Natural	0.125" (3.2)	0.218" (5.5)	0.02" (.5)	1/16" (1.6) – 1/2" (12.7)	100' (30.5M)	1 Pkg.
T19T-C		Natural	0.188" (4.8)	0.250" (6.4)	0.03" (.76)	1/8" (3.2) – 1" (25.4)	100' (30.5M)	1 Pkg.
T25T-L		Natural	0.25" (6.4)	0.375" (9.5)	0.03" (.76)	3/16" (4.8) – 2" (50.8)	50' (15.2M)	1 Pkg.
T50T-Q		Natural	0.5" (12.7)	0.5" (12.7)	0.03" (.76)	3/8" (9.5) – 4" (101.6)	25' (7.6M)	1 Pkg.
T62T-Q		Natural	0.625" (15.9)	0.625" (15.9)	0.03" (.76)	1/2" (12.7) – 4 1/2" (114.3)	25' (7.6M)	1 Pkg.
T75T-X		Natural	0.75" (19.1)	0.875" (22.2)	0.03" (.76)	5/8" (15.9) – 5" (127)	10' (3.0M)	1 Pkg.
T100T-X		Natural	1" (25.4)	1.125" (28.6)	0.04" (1.01)	7/8" (22.2) – 6" (152.4)	10' (3.0M)	1 Pkg.

*Order in multiples of Std. Pkg. Qty.

‡ PTFE or equivalent fluorocarbon PTFE material is used. PTFE is a registered trademark of E.I. DuPont Co.

NOTE: Custom cut-to-length sizes are available upon request. Contact factory for details.