

C1632X7R0J225M115AC

--- Multilayer Ceramic Chip Capacitor (MLCC) ---




Application & Main Feature

Commercial Grade (Low ESL Reverse Geometry)

Series

C1632 [EIA CC0612]

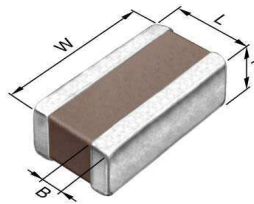

Dimensions

L 1.60mm +/-0.2mm
 W 3.20mm +/-0.2mm
 T 1.15mm +/-0.15mm
 B 0.20mm Min.

Temperature Characteristic

X7R (-55 to 125 degC +/-15%)

Rated Voltage

0J (6.3Vdc)

Capacitance

2.2uF

Capacitance Tolerance

M (+/-20%)

Dissipation Factor

5% Max.


Insulation Resistance

45Mohm Min.


AEC-Q200

Not Applicable


|Z|, ESR vs. Freq. Characteristics

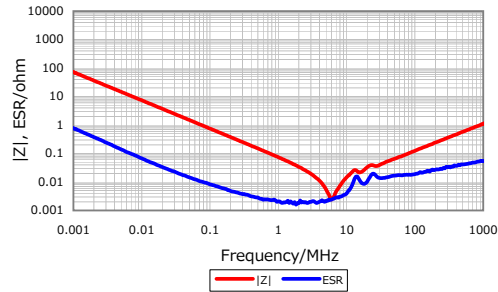


Cap. vs. Freq. Characteristic

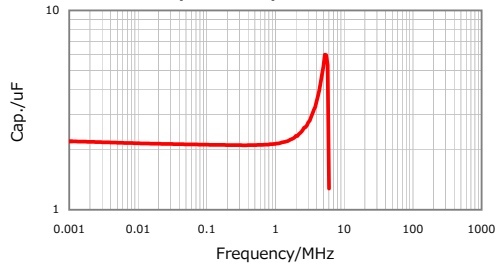


DC Bias Characteristic

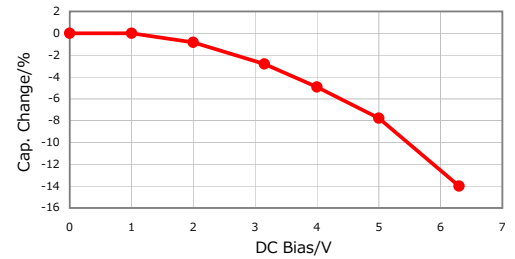

Temperature Characteristic

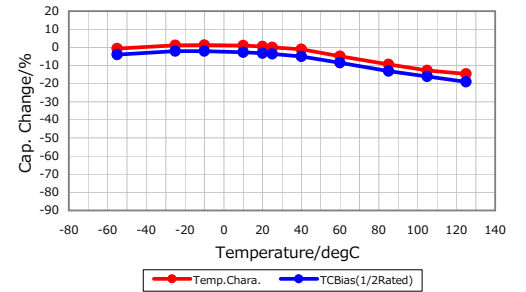

Ripple Temperature Rise Characteristic

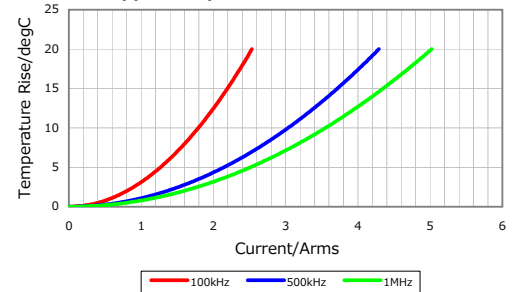

Characterization Sheet



⚠ All specifications are subject to change without notice.

December 22, 2012