

# C2012X6S1A106K085AC

--- Multilayer Ceramic Chip Capacitor (MLCC) ---



## Application & Main Feature

Commercial Grade ( General (Up to 50V) )

## Series

C2012 [EIA CC0805]



## Dimensions

L 2.00mm +/-0.2mm  
 W 1.25mm +/-0.2mm  
 T 0.85mm +/-0.15mm  
 B 0.20mm Min.  
 G 0.50mm Min.

## Temperature Characteristic

X6S (-55 to 105 degC +/-22%)

## Rated Voltage

1A (10Vdc)

## Capacitance

10uF

## Capacitance Tolerance

K (+/-10%)

## Dissipation Factor

10% Max.


## Insulation Resistance

10Mohm Min.


## AEC-Q200

Not Applicable


**|Z|, ESR vs. Freq. Characteristics**

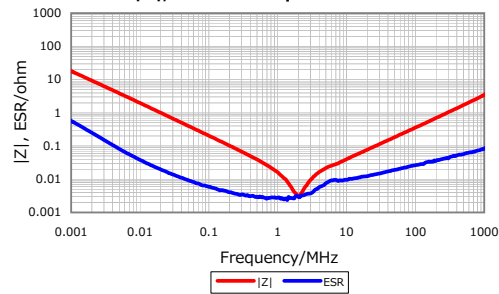


**Cap. vs. Freq. Characteristic**

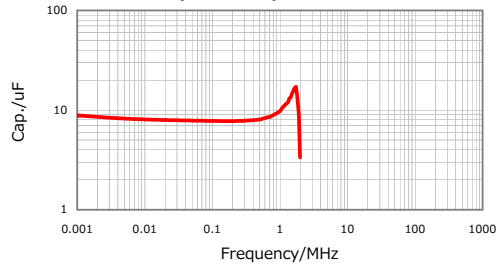


**DC Bias Characteristic**

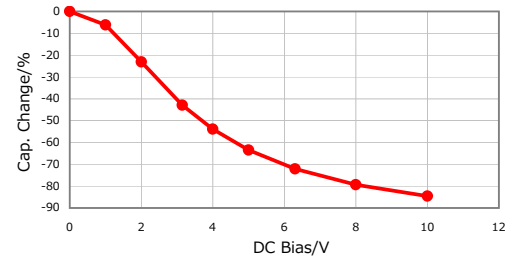

**Temperature Characteristic**

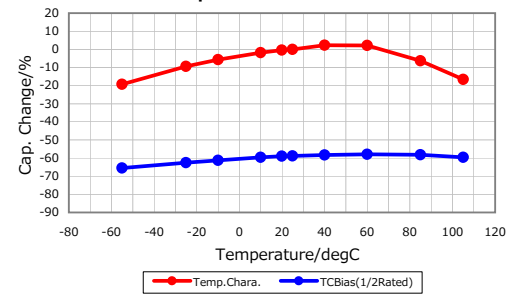

**Ripple Temperature Rise Characteristic**

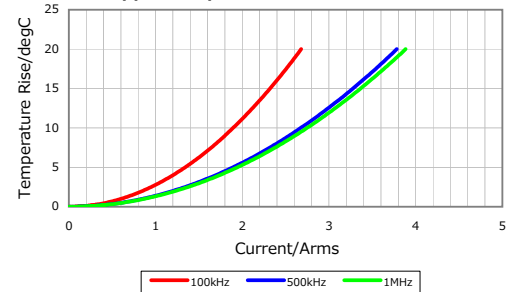

Characterization Sheet



All specifications are subject to change without notice.

December 22, 2012