



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © Copyright BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LUC		DST		REVISIONS			
P	DR	DATE	DESCRIPTION	DATE	BY	APP	
G			ECO-09-015847	07JUL09	AG	RZ	

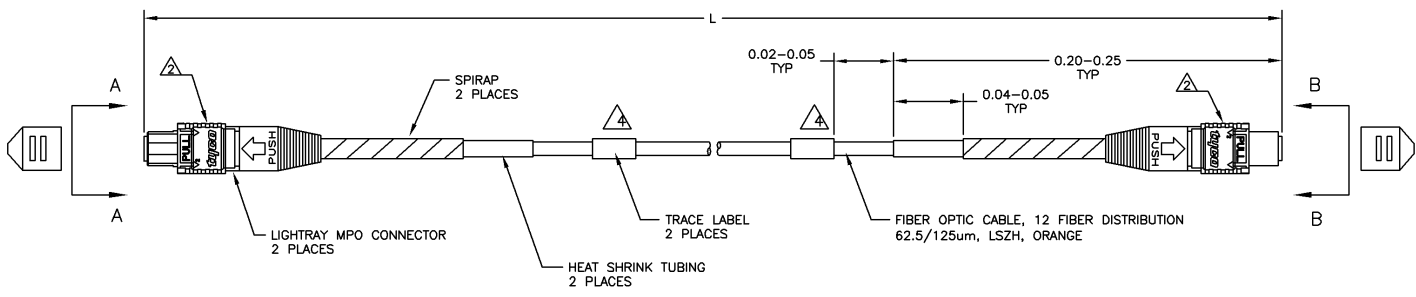

PAIRS FLIPPED

FIBER #	COLOR
1	BLUE
2	ORANGE
3	GREEN
4	BROWN
5	SLATE
6	WHITE
7	RED
8	BLACK
9	YELLOW
10	VIOLET
11	ROSE
12	AQUA



FIBER #	COLOR
1	ORANGE
2	BLUE
3	BROWN
4	GREEN
5	WHITE
6	SLATE
7	BLACK
8	RED
9	VIOLET
10	YELLOW
11	AQUA
12	ROSE

- LOSS OF CABLE ASSEMBLY < 0.6 dB PER IEC61300-3-4 @850nm
 PLUS CABLE ATTENUATION 3.5dB/KM.
 LOSS OF CABLE ASSEMBLY <1.5dB OFL @1300nm
 PLUS CABLE ATTENUATION 1.5dB/KM.
 RETURN LOSS > 20dB @1300nm.

⚠ WHITE MARK ON CONNECTOR BODY INDICATES FIBER 1 SIDE.

⚠ PRINT THE LABEL FOR THE OTHER PARTS AS SHOWN:



- LSZH CABLE SHALL COMPLY WITH THE FOLLOWING REQUIREMENTS:
 - FIRE PROPAGATION: IEC 60332-2 OR -1
 - SMOKE EMISSION: IEC 601034
 - ACID GAS EMISSION: IEC 60754
 - TOXICITY: NES 713


LIGHTRAY CONNECTOR FIBER PATH

THIS DRAWING IS A CONTROLLED DOCUMENT.		DR: SHI BI YUN 10ND05	TYCO Tyco Electronics Corporation Shanghai, China
DIMENSIONS: METRIC		DR: ALLEN GUMP 10ND05	NAME: Electronics
TOLERANCES UNLESS OTHERWISE SPECIFIED:		DR: RICHARD ZHAO 10ND05	PROJECT SPEC: MPO TO MPO TRUNK OM1 12F LSZH P/FLIPPED
0 P/C	±	APPLICATION SPEC	SCALE: 00779 C=1568663
1 P/C	±	HEIGHT	RESTRICTED TO: 1
2 P/C	±	CUSTOMER DRAWING	SCALE: NTS SHEET 1 OF 2 REV: C

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

PART NUMBER	"L" (meter)	
	Min	Max
0-1568663-1	10.00	10.30
0-1568663-2	20.00	20.40
0-1568663-3	30.00	30.60
0-1568663-4	40.00	40.80
0-1568663-5	50.00	51.00
0-1568663-6	60.00	61.20
0-1568663-7	70.00	71.40
0-1568663-8	80.00	83.00
0-1568663-9	90.00	93.00
1-1568663-0	100.00	103.00
1-1568663-1	110.00	115.5
1-1568663-2	120.00	126.0
1-1568663-3	130.00	136.5
1-1568663-4	140.00	147.0
1-1568663-5	150.00	157.5
1-1568663-6	160.00	168.0
1-1568663-7	170.00	178.5
1-1568663-8	180.00	189.0
1-1568663-9	190.00	199.5
2-1568663-0	200.00	210.0
2-1568663-1	210.00	220.5
2-1568663-2	220.00	231.0
2-1568663-3	230.00	241.5
2-1568663-4	240.00	252.0
2-1568663-5	250.00	262.5
2-1568663-6	260.00	273.0
2-1568663-7	270.00	283.5
2-1568663-8	280.00	294.0
2-1568663-9	290.00	304.5
3-1568663-0	300.00	315.0
4-1568663-1	15.00	15.30
4-1568663-2	25.00	25.50
4-1568663-3	35.00	35.70
4-1568663-5	55.00	56.10
4-1568663-6	65.00	66.30

LOC	DST	REVISIONS					
		P	DATE	DESCRIPTION	DATE	BY	APPD
HG	-	-	-	SEE SHEET 1	-	-	-

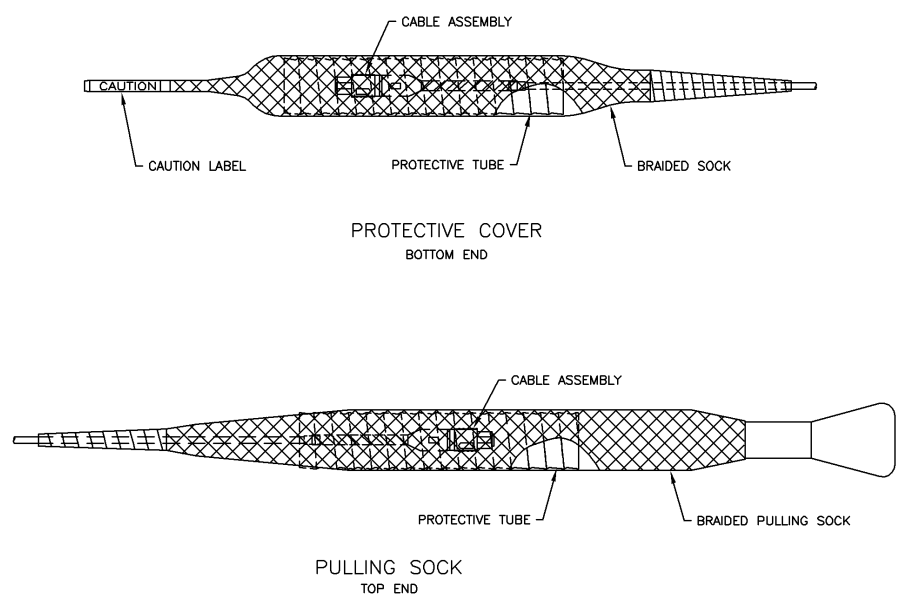

THIS DRAWING IS A CONTROLLED DOCUMENT.		DR: SHI BI YUN 104005	TYCO Tyco Electronics Corporation
DIMENSIONS: METRIC		DR: ALLEN GUMP 104005	Electronics Shanghai, China
TOLERANCES UNLESS OTHERWISE SPECIFIED:		DR: RICHARD ZHAO 104005	NAME: MPO TO MPO TRUNK OM1 12F LSZH P/FLIPPED
0 P/C	± .005	PRODUCT SPEC	APPLICATION SPEC
1 P/C	± .005	APPLICATION SPEC	WEIGHT
2 P/C	± .005	WEIGHT	RESTRICTED TO
3 P/C	± .005	CUSTOMER DRAWING	SCALE: NTS
4 P/C	± .005		SHEET 2 OF 2
MATERIAL	FINISH		REV C

AMP 3307-7 REV 31MAR2000

1568663