
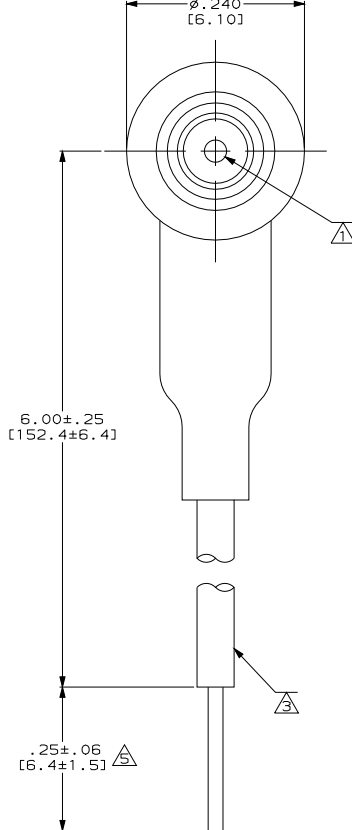


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
DF	50			C		REACTIVATE, OH14-0329-05 CT	7-21-05	DE

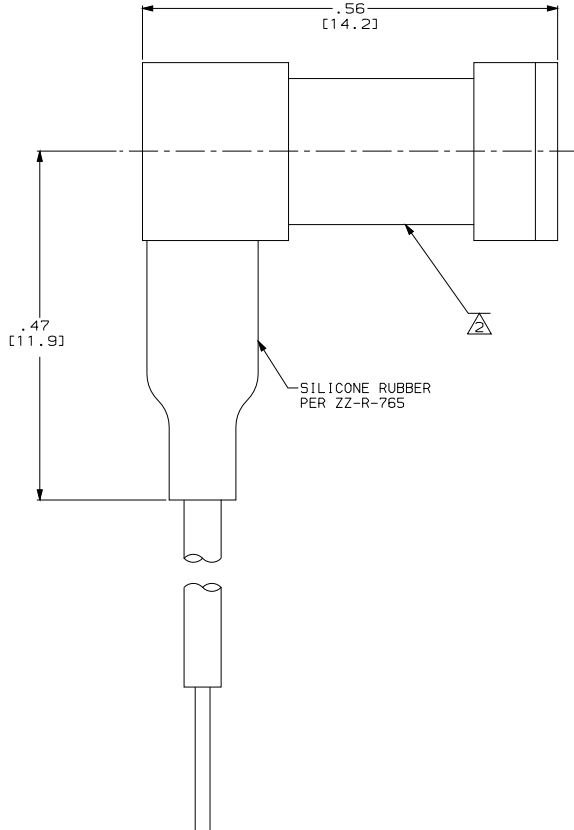

- 1 SIZE 22 PIN CONTACT: .030 [0.76] DIA  
MAT'L: BRASS PER QQ-B-626.
- 2 RECEPTACLE HOUSING:  
MAT'L: GLASS FILLED POLYETHERIMIDE RESIN.
- 3 CONDUCTOR:  
24 (19/36) AWG SILVER PLATED COPPER  
INSULATION: SILICONE COATED FEP, Ø.060 ± .005 [1.52 ± 0.13]
- 4. OPERATING TEMP: -55°C TO +125°C  
TEST VOLTAGE: 18 KVDC AT 70,000 FT. ALTITUDE.  
OPERATING VOLTAGE: 12 KVDC AT 70,000 FT ALTITUDE.
- 5 PIGTAIL IS SOLDER DIPPED.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm] TOLERANCES ON: 2 PLC DEC ± .02 [0.5] 3 PLC DEC ± .005 [0.13] ANGLES ± -	DR 5-3-93 C. C. THOMAS
MATERIAL SEE CALLOUTS	CHK 1-11-95 D. EABY
FINISH SEE CALLOUTS	APPD 1-11-95 D. EABY
	RLSE 9-3-02 C. C. THOMAS
	PRODUCT SPEC -
	APPLICATION SPEC -
	WEIGHT -

<b>AMP</b> AMP Incorporated Harrisburg, PA 17105-3608			
NAME RCPT. ASSY, MICRO SUB-MINIATURE, RIGHT ANGLE, LGH			
SIZE	CAGE CODE	DRAWING NO	
©	00779	©-448659	
SCALE 10:1	SHEET		1 OF 1

CUSTOMER DRAWING