
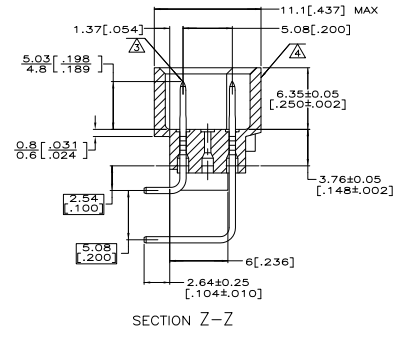
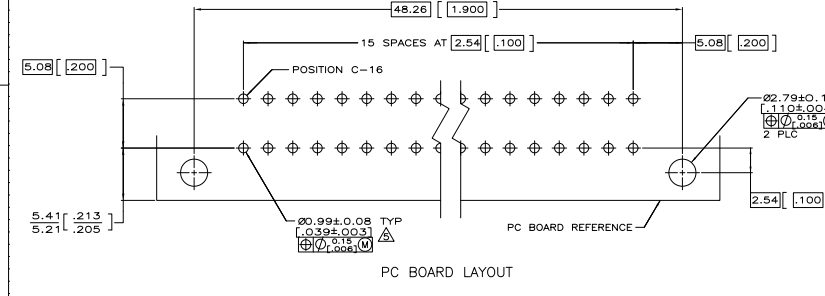
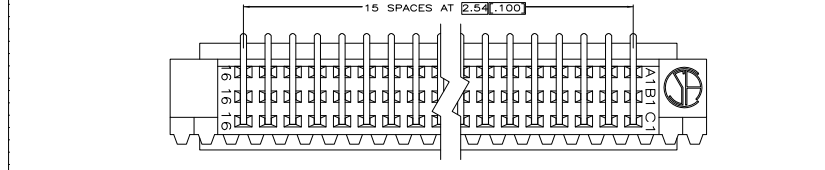
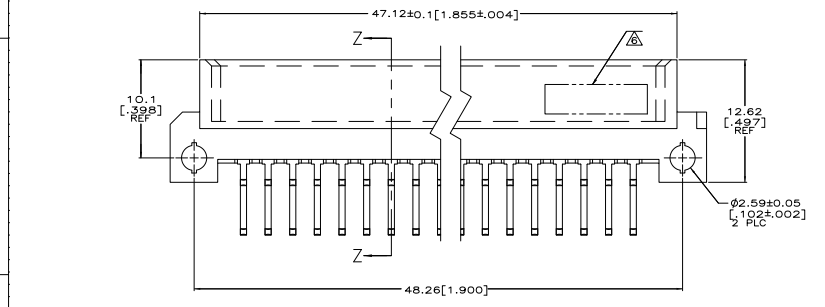


REV	DATE	DESCRIPTION	BY	CHK	APP
AD 25					
01		REVISED FOR ECO-07-018157			

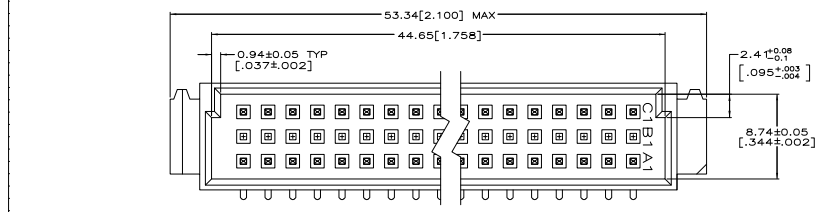

- △ HOUSING MATERIAL: GLASS-FILLED POLYMER.
- △ POST MATERIAL: COPPER ALLOY.
- △ POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- △ MARKING ON THIS SIDE.
- △ RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- △ [PART NUMBER, DATE CODE] MARKED THIS APPROXIMATE AREA.

1-16	X	-	X	32	5650946-5
POSITIONS LOADED	C	B	A	NO. OF LOADED POSITIONS	ASSY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		REV	DATE	DESCRIPTION	BY	CHK	APP
INCHES	MILLIMETERS						
1/16	1.5875						
1/8	3.175						
3/16	4.7625						
1/4	6.35						
5/16	7.9375						
3/8	9.525						
7/16	11.1125						
1/2	12.7						
5/8	15.875						
3/4	19.05						
7/8	22.225						
1	25.4						
1 1/8	31.75						
1 1/4	38.1						
1 3/8	44.45						
1 1/2	50.8						
1 5/8	57.15						
1 3/4	63.5						
1 7/8	69.85						
2	76.2						
2 1/8	82.55						
2 1/4	88.9						
2 3/8	95.25						
2 1/2	101.6						
2 5/8	107.95						
2 3/4	114.3						
2 7/8	120.65						
3	127						
3 1/8	133.35						
3 1/4	139.7						
3 3/8	146.05						
3 1/2	152.4						
3 5/8	158.75						
3 3/4	165.1						
3 7/8	171.45						
4	177.8						
4 1/8	184.15						
4 1/4	190.5						
4 3/8	196.85						
4 1/2	203.2						
4 5/8	209.55						
4 3/4	215.9						
4 7/8	222.25						
5	228.6						
5 1/8	234.95						
5 1/4	241.3						
5 3/8	247.65						
5 1/2	254						
5 5/8	260.35						
5 3/4	266.7						
5 7/8	273.05						
6	279.4						
6 1/8	285.75						
6 1/4	292.1						
6 3/8	298.45						
6 1/2	304.8						
6 5/8	311.15						
6 3/4	317.5						
6 7/8	323.85						
7	330.2						
7 1/8	336.55						
7 1/4	342.9						
7 3/8	349.25						
7 1/2	355.6						
7 5/8	361.95						
7 3/4	368.3						
7 7/8	374.65						
8	381						
8 1/8	387.35						
8 1/4	393.7						
8 3/8	400.05						
8 1/2	406.4						
8 5/8	412.75						
8 3/4	419.1						
8 7/8	425.45						
9	431.8						
9 1/8	438.15						
9 1/4	444.5						
9 3/8	450.85						
9 1/2	457.2						
9 5/8	463.55						
9 3/4	469.9						
9 7/8	476.25						
10	482.6						
10 1/8	488.95						
10 1/4	495.3						
10 3/8	501.65						
10 1/2	508						
10 5/8	514.35						
10 3/4	520.7						
10 7/8	527.05						
11	533.4						
11 1/8	539.75						
11 1/4	546.1						
11 3/8	552.45						
11 1/2	558.8						
11 5/8	565.15						
11 3/4	571.5						
11 7/8	577.85						
12	584.2						
12 1/8	590.55						
12 1/4	596.9						
12 3/8	603.25						
12 1/2	609.6						
12 5/8	615.95						
12 3/4	622.3						
12 7/8	628.65						
13	635						
13 1/8	641.35						
13 1/4	647.7						
13 3/8	654.05						
13 1/2	660.4						
13 5/8	666.75						
13 3/4	673.1						
13 7/8	679.45						
14	685.8						
14 1/8	692.15						
14 1/4	698.5						
14 3/8	704.85						
14 1/2	711.2						
14 5/8	717.55						
14 3/4	723.9						
14 7/8	730.25						
15	736.6						
15 1/8	742.95						
15 1/4	749.3						
15 3/8	755.65						
15 1/2	762						
15 5/8	768.35						
15 3/4	774.7						
15 7/8	781.05						
16	787.4						
16 1/8	793.75						
16 1/4	800.1						
16 3/8	806.45						
16 1/2	812.8						
16 5/8	819.15						
16 3/4	825.5						
16 7/8	831.85						
17	838.2						
17 1/8	844.55						
17 1/4	850.9						
17 3/8	857.25						
17 1/2	863.6						
17 5/8	869.95						
17 3/4	876.3						
17 7/8	882.65						
18	889						
18 1/8	895.35						
18 1/4	901.7						
18 3/8	908.05						
18 1/2	914.4						
18 5/8	920.75						
18 3/4	927.1						
18 7/8	933.45						
19	939.8						
19 1/8	946.15						
19 1/4	952.5						
19 3/8	958.85						
19 1/2	965.2						
19 5/8	971.55						
19 3/4	977.9						
19 7/8	984.25						
20	990.6						