
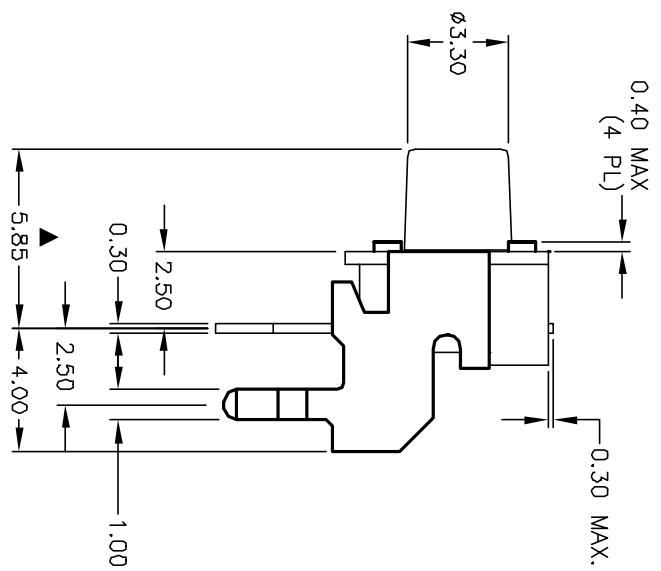
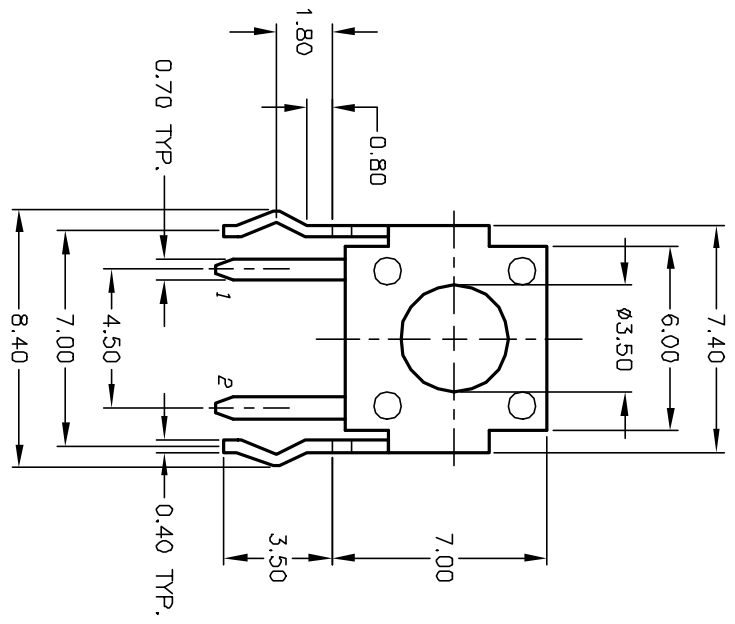


RECOMMENDED P.C.B. LAYOUT



- NOTES:
1. ALL DIMENSIONS IN MM
  2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
  3. TERM. NOS. FOR REF. ONLY
  4. RATING: 50mA, @12V DC
  5. TRAVEL: 0.25±0.1mm
  6. OPERATING FORCE: 160±50gf
  7. CONTACT RESISTANCE: 100 milliohms Max.
  8. ELECTRICAL LIFE: 100,000 CYCLES MIN.
  9. DESIGNATE MAJOR DIMENSIONS
  10. MATERIAL: PPS (STEM & BODY) TO WITHSTAND IR REFLOW TEMP. OF 260°C MAX. FOR 30 SECONDS

REV.	ECN No.	ADD	TEMPERATURE NOTE	DATE	CHKD
C	11844	ADD	TEMPERATURE NOTE	11/28/01	CJB

TITLE	SCALE	DATE	DR	DWG	REV
TL 1105 X F160 Q (94 VQ)	4:1	2/19/01	CJB	P020230	C

