
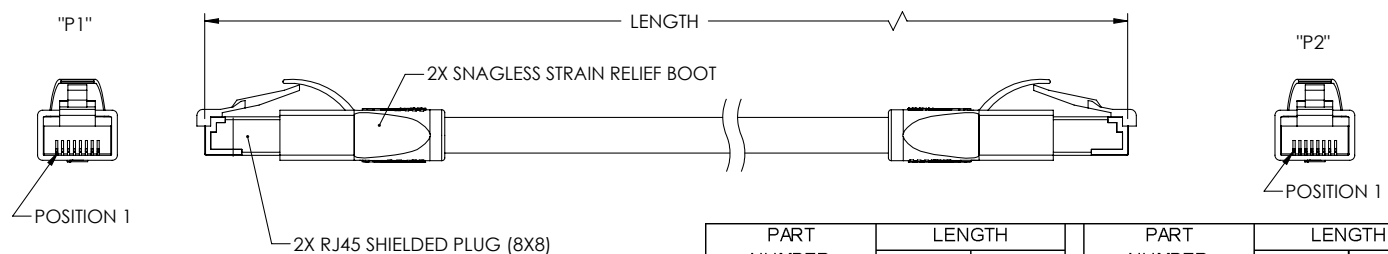


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
G	ECN 3639: REMOVED SPOOL FROM PACKAGING NOTE	10/14/08	D. FRISIELLO
H	ECN 4174: CN RELEASE	8/10/09	D. CASTRO



PART NUMBER	LENGTH		PART NUMBER	LENGTH	
	FEET	METERS		FEET	METERS
TRD695SZ-1	1.0	0.31	TRD695SZ-50	50.0	15.24
TRD695SZ-2	2.0	0.61	TRD695SZ-60	60.0	18.29
TRD695SZ-3	3.0	0.91	TRD695SZ-75	75.0	22.86
TRD695SZ-5	5.0	1.52	TRD695SZ-80	80.0	24.38
TRD695SZ-7	7.0	2.13	TRD695SZ-90	90.0	27.43
TRD695SZ-10	10.0	3.05	TRD695SZ-100	100.0	30.48
TRD695SZ-15	15.0	4.57	TRD695SZ-150	150.0	45.72
TRD695SZ-20	20.0	6.10	TRD695SZ-200	200.0	60.96
TRD695SZ-25	25.0	7.62	TRD695SZ-250	250.0	76.20
TRD695SZ-30	30.0	9.14	TRD695SZ-300	300.0	91.44
TRD695SZ-40	40.0	12.19			

NOTES:
MATERIAL:
 PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0
 CONTACTS: PHOSPHOR BRONZE
 CABLE JACKET: LOW SMOKE, ZERO HALOGEN, LIGHT GRAY: RAL #7035.
 PLUG SHIELDING: BRASS
 SNAGLESS BOOT: LSZH, BLACK

FINISH:
 CONTACTS: 50 μINCHES GOLD PLATED IN CONTACT AREA
 OVER 100 μINCHES NICKEL PLATE OVERALL
 PLUG SHIELDING: NICKEL PLATED

CABLE CHARACTERISTICS:
 SHIELDED, FOUR TWISTED PAIR, CAT 6 MODULAR CABLE
 CONDUCTORS: 26 AWG STRANDED COPPER,
 SHIELDING: ALUMINUM/ POLYESTER

MISCELLANEOUS:
 ASSEMBLY WIRED PER TIA/EIA 568B SEQUENCE
 DRAIN WIRE TIED TO CONNECTOR SHELLS
 PLUG CONFORMS TO TIA-1096
 CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
 CABLE ASSEMBLY TO BE INDIVIDUALLY PACKAGED IN A POLYBAG.

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 > 12 [305] ≤ 60 [1524] = +2 [51] / -0 > 60 [1524] ≤ 120 [3048] = +4 [102] / -0 > 120 [3048] ≤ 300 [7620] = +6 [152] / -0 > 300 [7620] = +5% / -0%	DRAWN BY D. PARHAM	03/15/2006	
ALL OTHER DIMENSIONAL TOLERANCES: $X = \pm .2$ $XX = \pm .02$ $XXX = \pm .005$	CHECKED BY J. KIEZULAS	03/16/2006	
PROJECTION	C. MCCORMICK	03/16/2006	CATEGORY MODULAR PRODUCT DESCRIPTION CATEGORY 6 SHIELDED LSZH PATCH CORD
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A FSCM NO. 43321 DWG. NO. TRD695SZ REV. H SCALE: NONE CAD FILE: TRD695SZ.LDDRW SHEET 1 OF 1