


**MARKETING SALES DRAWING**  
**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**

Electrical Testing  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.

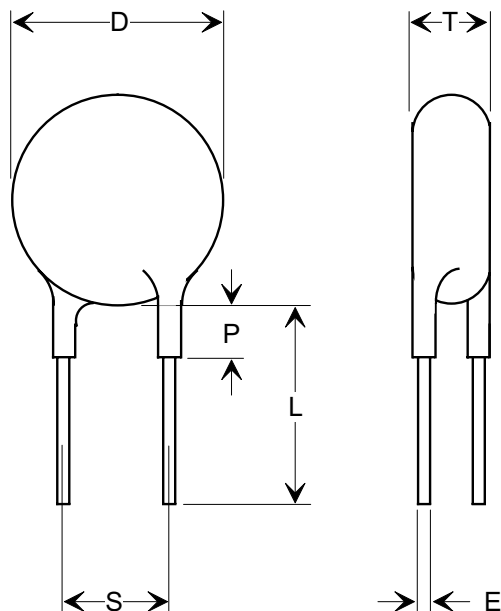

**SPECIFICATIONS**

TUSONIX PART NO.	0808-540-X7W0-352M	
D (Diameter):	.360	
T (Thickness):	.156	
S (Lead Wire Spacing):	.250 ±.031	
L (Lead Wire Length):	1.5 MIN.	
E (Lead Wire Diameter):	.025 (22 AWG.)	
P (Coating on Leads Max.):	.125 MAX.	
Capacitance Value:	3500 pF	
Capacitance Tolerance:	± 20%	
Temperature Coefficient:	X7W	
Voltage:	Working:	1 KVDC
	Test:	1750 VDC
	Life:	1500 VDC
Marking:	TMK, CAP, TOL, TC	

NOTE:  
PART TO BE DUREZ COATED,  
NO WAX IMPREGNATION, WITH  
A JET SEAL OVERCOAT.

<b>REVISION RECORD</b>	0	<b>--TOLERANCES--</b> Unless Otherwise Specified	Title	
	Original Release		<b>DISC</b>	Drawn S.M. 10-06-97
	C.O.			Approved J.Mc. 10-06-97
			<b>TUSONIX</b> TUCSON, ARIZONA	<b>A</b>