
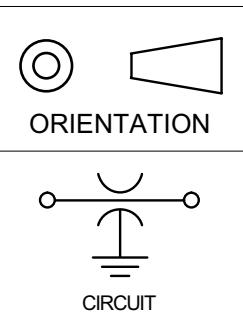


**MARKETING SALES DRAWING**  
**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**

This drawing is the property of  
 Tusonix, Inc., and may not be  
 used, reproduced, published or  
 disclosed to others without ex-  
 pressed authorization by Tusonix Inc.

Electrical Testing  
 per Tusonix standard  
 test plans and Mil-Std-202  
 Test Methods.

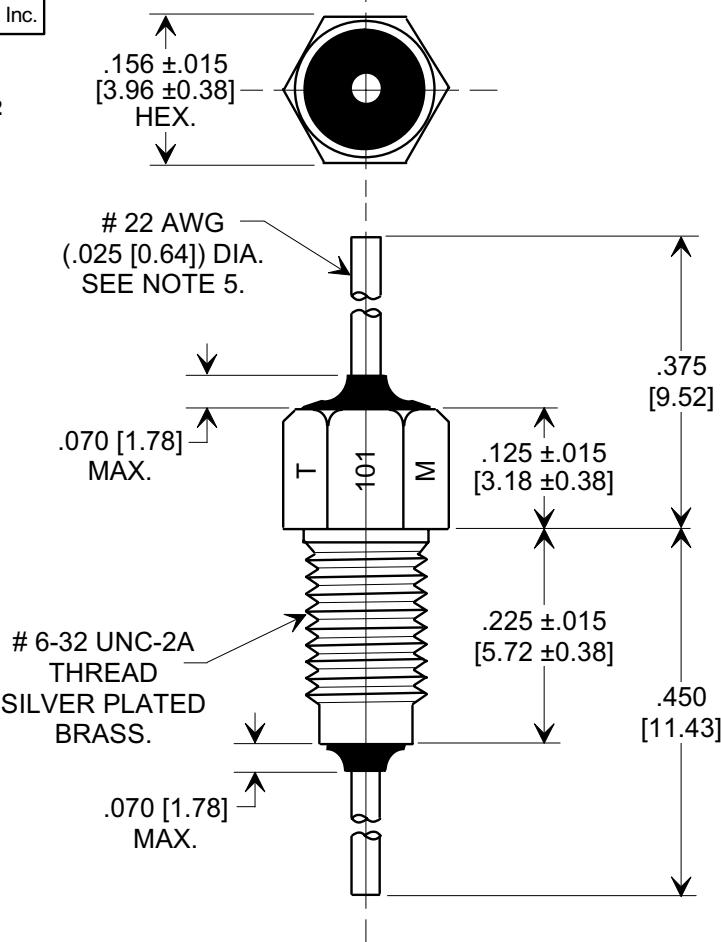

NOTES:

1. SUPPLIED WITH SILVER PLATED HEX NUT AND INTERNAL TOOTH LOCK WASHER.
2. MOUNTING TORQUE NOT TO EXCEED 5 lb - in. MAX. [.565 N-m]
3. TUSONIX STANDARD PART NUMBER: 2430-003-X5F0-101M.  
TUSONIX RoHS COMPLIANT PART NUMBER: 2430-003-X5F0-101M LF.  
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
4. PART MARKING: STANDARD: BLACK INK FOR TRADEMARK AND CAP. CODE.  
RoHS PART: GREEN FOR TRADEMARK AND CAP. CODE.
5. LEAD: STANDARD PART, 60/40 SOLDER PLATED. RoHS PART, SILVER PLATED.

**SPECIFICATIONS**

TUSONIX STYLE:	2430-003
Capacitance:	100 pF
Tolerance:	±20 %
Temp. Coefficient:	X5F
Operating Temp.:	-55°C TO 85°C
Working Voltage:	200 VDC
I.R. MIN. @ 100 (VDC)	10 G Ω
DWV	600 VDC

REVISION RECORD	0		--TOLERANCES-- Unless Otherwise Specified	Title
	C.O. 20020416-2-01		DECIMAL ± .031 [0.79]	
	1		ANGLES ±	Drawn S.M. 04-16-02 Scale 5 X
	20060602-2-02			Approved T.C. 04-16-02
			<b>TUSONIX</b> TUCSON, ARIZONA	A 2430-003-X5F0-101M