




Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []



16 AWG (.051) [1.29]
SILVER PLATED,
COPPER

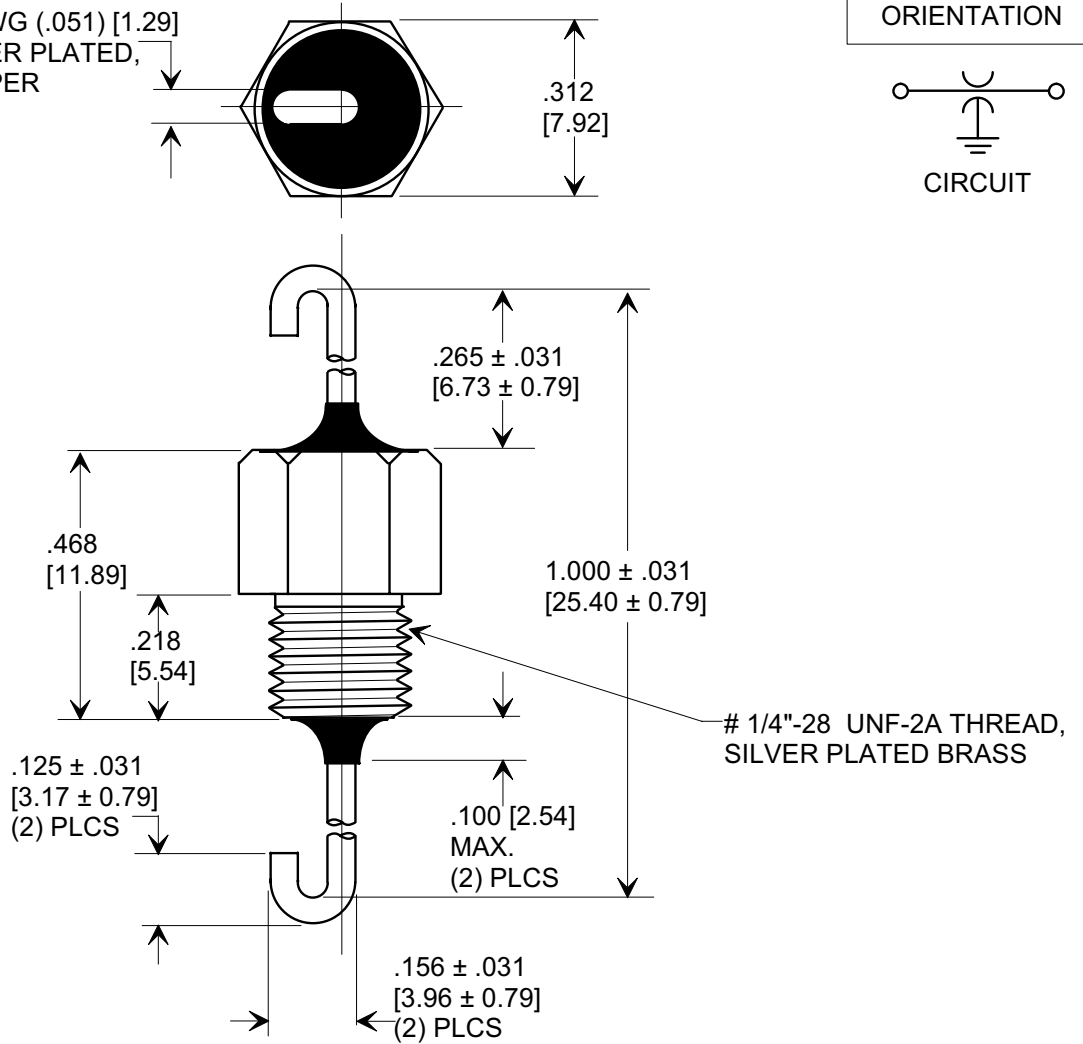

SPECIFICATIONS

Style No:	2443-007
Value:	100 pF
Value Tol.:	±10%
Temp. Coef.:	U2M
Rating:	500 WVDC @ 85°C
Operating Range:	-55°C TO +85°C
To Tusonix Spec Unless Stated Otherwise	

NOTES:

- TUSONIX STANDARD PART NUMBER: 2443-007-U2M0-101K. TUSONIX RoHS COMPLIANT PART NUMBER: 2443-007-U2M0-101K LF. CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
- PART MARKING: TRADEMARK, CAPACITANCE AND TOLERANCE CODE: STANDARD PART: BLACK INK. RoHS PART: GREEN INK.
- SUPPLIED WITH SILVER PLATED HEX NUT AND LOCK WASHER, BULK PACKAGED.

REVISION RECORD Original Release C.O. 20050427-2-02 0	--TOLERANCES-- Unless Otherwise Specified		Title BUSHING STYLE FEED-THRU CAPACITOR	
	DECIMAL ± .015 [0.38]			
	ANGLES ±		Drawn S.M. 05-03-05	
	TUSONIX TUCSON, ARIZONA		Approved R.C. 05-03-05	
A 2443-007-U2M0-101K				