
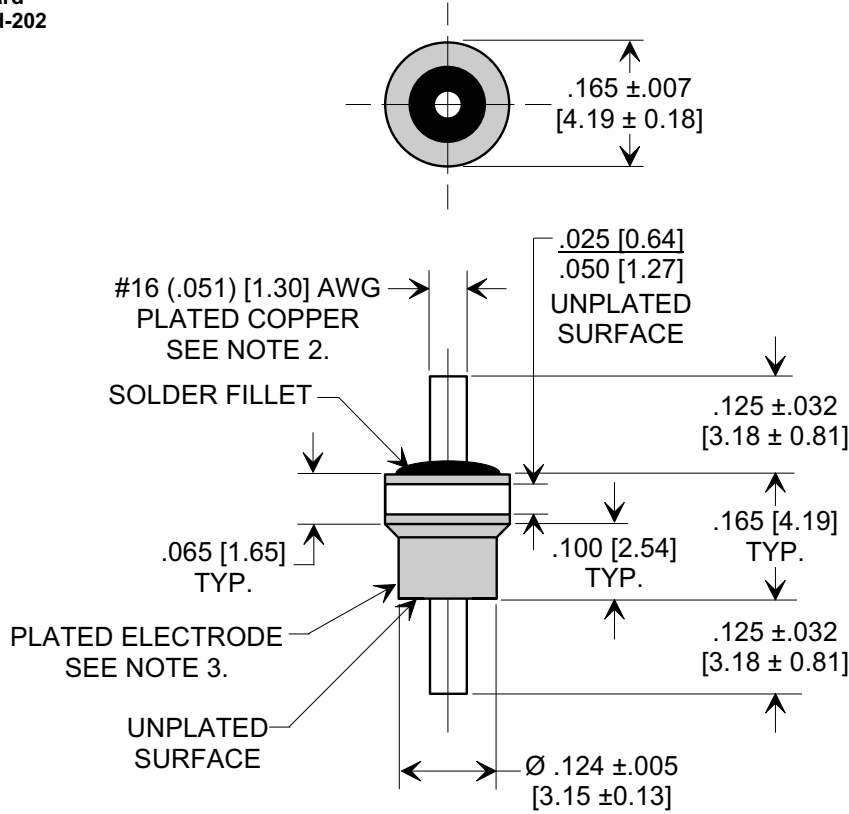



# MARKETING SALES DRAWING

**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**

This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

**Electrical Testing**  
**per Tusonix standard**  
**test plans and Mil-Std-202**  
**Test Methods.**



OPERATING INFORMATION	
STYLE NO.	2461-013
VALUE	800 pF
VALUE TOL.	GMV
TEMP. COEF.	X5V
RATING	200VDC @ +85°C
OPERATING RANGE	-55°C,+125°C
DWV	600
I.R. MIN @ 100VDC	10 GΩ
TO TUSONIX SPEC. UNLESS STATED OTHERWISE.	

**NOTES:**

1. TUSONIX STANDARD PART NUMBER: 2461-013-X5V0-801AA.  
 TUSONIX RoHS COMPLIANT PART NUMBER:  
 2461-013-X5V0-801AA. LF.  
 CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
2. LEAD FINISH: STANDARD PART #: 60/40 SOLDER PLATED. RoHS PART #: SILVER PLATED.
3. ELECTRODE FINISH: STANDARD PART #: 60/40 SOLDER PLATED. RoHS PART #: MATTE TIN PLATED.
4. PART MARKING: STANDARD PART: NO MARKING. RoHS PART: MARKING ON PACKAGING ONLY.

X-2015 Rev-0

<b>REVISION RECORD</b>	Original Release	0	<b>1</b> REVISED DRW. TO MATCH CATALOG DWG. S.M. 10-04-04	<b>2</b> SOLDER PLATED WAS TIN. S.M. 06-20-05	<b>3</b> ADDED NOTES. S.M. 07-20-06	<b>4</b> 20060614-1-09	--TOLERANCES-- Unless Otherwise Specified		Title <b>SHOULDER FEED-THRU</b>	
	C.O. 20021112-1-08						DECIMAL ± .015 [0.38]	Drawn S.M. 11-18-02		Scale 4 X
	DIM'S REVISED .025/.050 WAS .030/.050. L.E. 03-24-04						ANGLES ±	Approved B.Mc. 11-18-02		
	20040324-3-04						<b>TUSONIX</b> TUCSON, ARIZONA	<b>A 2461-013-X5V0-801AA</b>		