




# MARKETING SALES DRAWING

**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**

This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.



**Electrical Testing**  
**per Tusonix standard**  
**test plans and Mil-Std-202**  
**Test Methods.**

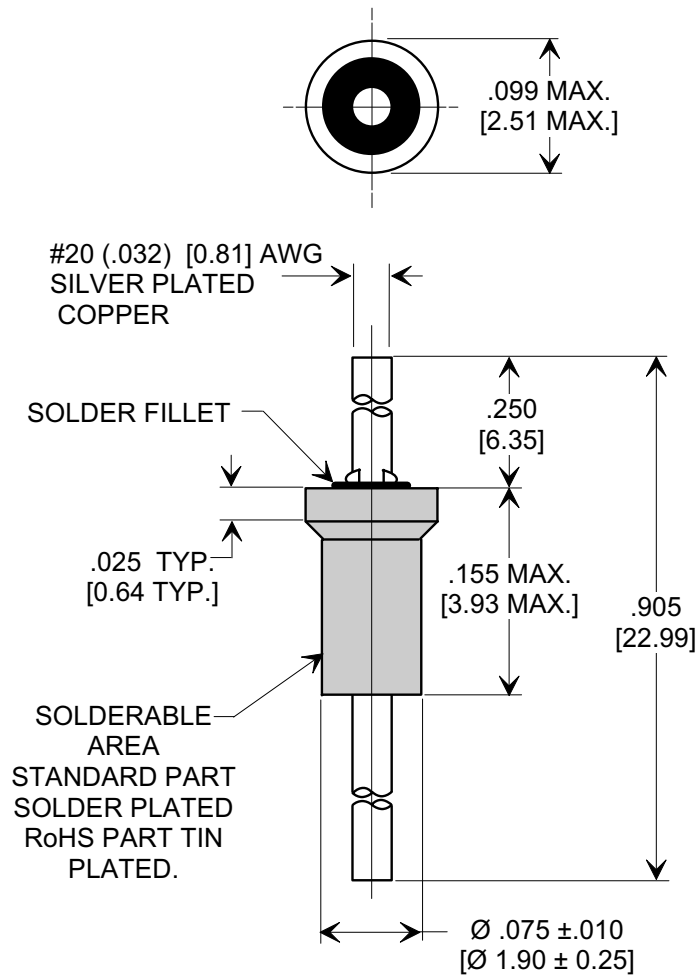

## SPECIFICATIONS

CAP. VALUE	1500 pF
CAP. TOL.	+100, -0%
TEMP. CHAR.	X5U
OPERATING TEMP.	-55° TO +125°C
OPERATING VOLT.	200 WVDC @ +85 °C
DIELECTRIC WITHSTANDING	400 VDC, 2 SEC.

## NOTES:

- TUSONIX STANDARD PART NUMBER: 2463-061-X5U0-152P.  
 TUSONIX RoHS COMPLIANT PART NUMBER:  
 2463-061-X5U0-152 LF.  
 CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
- PART MARKING: STANDARD PART: NO MARKING.  
 RoHS PART: GREEN LABELING ON PACKAGING.

X-2015 Rev-0

<b>REVISION RECORD</b> Original Release C.O. WAS SK 8188-088. S.M. 06-01-06 <b>20060530-2-03</b> <b>0</b>	--TOLERANCES-- Unless Otherwise Specified		Title <b>SHOULDER FEED-THRU</b>	
	DECIMAL ± .031 [0.079]		Drawn	S.M. 05-03-04
	ANGLES ±		Scale	7X
	<b>TUSONIX</b> TUCSON, ARIZONA		Approved	T.C. 05-03-04
		<b>A</b>	<b>2463-061-X5U0-152P</b>	