

ALUMINUM ELECTROLYTIC CAPACITORS



nichicon

BW series High Temperature Range, For +135°C Use



NEW


- Highly dependable reliability withstanding load life of 1000 to 3000 hours at +135°C.
- Suited for automobile electronics where heavy duty services are indispensable.
- Adapted to the RoHS directive (2002/95/EC).

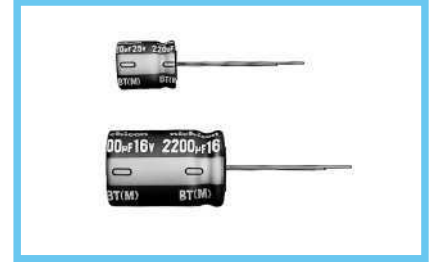

Specifications

Item	Performance Characteristics									
Category Temperature Range	-55 ~ +135°C									
Rated Voltage Range	10 ~ 100V									
Rated Capacitance Range	1 ~ 4700µF									
Capacitance Tolerance	±20% at 120Hz, 20°C									
Leakage Current	After 1 minute's application of rated voltage, leakage current is not more than 0.03CV or 4 (µA), whichever is greater.									
tan δ	Rated voltage (V)	10	16	25	35	50	63	80	100	120Hz, 20°C
	tan δ (MAX.)	0.20	0.16	0.14	0.12	0.10	0.10	0.08	0.08	
For capacitance of more than 1000µF, add 0.02 for every increase of 1000µF.										
Stability at Low Temperature	120Hz									
	Rated voltage (V)	10	16	25	35	50	63	80	100	
Impedance ratio	Z-25°C / Z+20°C	3	2	2	2	2	2	2	2	2
	ZT / Z20 (MAX.)	Z-40°C / Z+20°C	4	4	4	4	4	4	4	4
Endurance	After an application of D.C. bias voltage plus the rated ripple current for 3000 hours (1000 hours for φD = 8, 2000 hours for φD = 10) at 135°C the peak voltage shall not exceed the rated D.C. voltage, capacitors meet the characteristics requirements listed at right.									
	Capacitance change	Within ±30% of initial value								
	Dissipation Factor	300% or less of initial specified value								
Shelf Life	After storing the capacitors under no load at 135°C for 1000 hours, and after performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they will meet the specified value for endurance characteristics listed above.									
	Leakage current									
Marking	Printed with white color letter on blue sleeve.									


Radial Lead Type

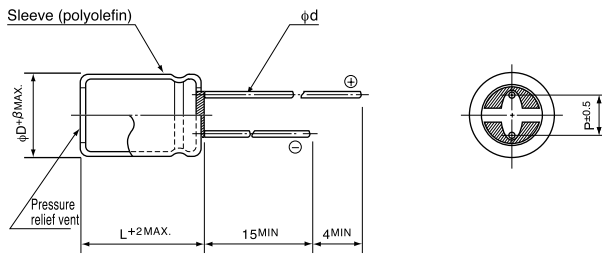

	(mm)			
φD	8	10	12.5	16
β	0.8	0.8	1.0	1.0
P	3.5	5.0	5.0	7.5
φd	0.8	0.6	0.6*	0.8

* In case L > 25 for the φ12.5 dia. unit, lead dia. φd = 0.8mm.

Type numbering system (Example : 10V 220µF)

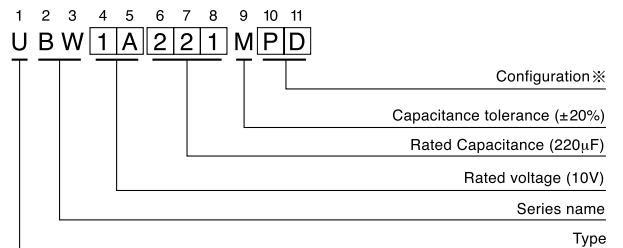

※ Configuration

φ D	Pb-free leadwire Pb-free Polyolefin sleeve
8 · 10	PD
12.5 · 16	HD

- Please refer to page 21 about the end seal configuration.

Please refer to page 21, 22, 23 about the formed or taped product spec.
Please refer to page 3 for the minimum order quantity.

• Dimension table in next page.

CAT.8100V

■ Dimensions

Cap. (μF)	V(Code)	Item Code	10 (1A)			16 (1C)			25 (1E)			35 (1V)		
			Case size φD × L (mm)	Impedance (Ω) MAX.	Rated ripple (mAmps)	Case size φD × L (mm)	Impedance (Ω) MAX.	Rated ripple (mAmps)	Case size φD × L (mm)	Impedance (Ω) MAX.	Rated ripple (mAmps)	Case size φD × L (mm)	Impedance (Ω) MAX.	Rated ripple (mAmps)
100	101					8 × 11.5	0.32	340	8 × 11.5	0.13	500	10 × 12.5	0.15	620
220	221		8 × 11.5	0.26	340	10 × 12.5	0.15	620	10 × 12.5	0.10	680	10 × 16	0.094	790
330	331		10 × 12.5	0.15	620	10 × 12.5	0.10	680	10 × 16	0.075	945	10 × 20	0.075	950
470	471		10 × 12.5	0.10	680	10 × 16	0.075	945	10 × 20	0.057	1100	12.5 × 20	0.058	1330
1000	102		10 × 20	0.057	1100	12.5 × 20	0.042	1490	12.5 × 25	0.033	1750	16 × 25	0.031	2010
2200	222		12.5 × 25	0.033	1750	16 × 25	0.024	2300	16 × 31.5	0.020	2710			
3300	332		16 × 25	0.024	2300	16 × 31.5	0.020	2710						
4700	472		16 × 31.5	0.020	2710									

Cap. (μF)	V(Code)	Item Code	50 (1H)			63 (1J)			80 (1K)			100 (2A)		
			Case size φD × L (mm)	Impedance (Ω) MAX.	Rated ripple (mAmps)	Case size φD × L (mm)	Impedance (Ω) MAX.	Rated ripple (mAmps)	Case size φD × L (mm)	Impedance (Ω) MAX.	Rated ripple (mAmps)	Case size φD × L (mm)	Impedance (Ω) MAX.	Rated ripple (mAmps)
1	010		8 × 11.5	2.00	35									
2.2	2R2		8 × 11.5	1.80	50									
3.3	3R3		8 × 11.5	1.50	60									
4.7	4R7		8 × 11.5	1.15	85							8 × 11.5	2.00	130
10	100		8 × 11.5	0.75	180							8 × 11.5	1.50	150
22	220		8 × 11.5	0.50	250	8 × 11.5	2.00	130	8 × 11.5	1.50	150	10 × 12.5	0.80	480
33	330		8 × 11.5	0.45	300	8 × 11.5	1.50	150	10 × 12.5	0.80	480	10 × 12.5	0.80	480
47	470		8 × 11.5	0.35	440	10 × 12.5	0.59	530	10 × 12.5	0.80	480	10 × 16	0.55	630
100	101		10 × 12.5	0.18	555	10 × 16	0.41	690	10 × 20	0.39	790	12.5 × 20	0.25	990
220	221		10 × 20	0.098	930	12.5 × 20	0.16	1050	12.5 × 25	0.18	1240	16 × 25	0.11	1500
330	331		12.5 × 20	0.070	1330	12.5 × 25	0.12	1290	12.5 × 31.5	0.16	1390	16 × 31.5	0.079	1790
470	471		12.5 × 25	0.055	1650	12.5 × 31.5	0.097	1460	16 × 25	0.11	1500			
1000	102		16 × 31.5	0.031	2430	16 × 31.5	0.055	1900						

Rated Ripple (mAmps) at 135°C 100kHz
Impedance (Ω)MAX. at 20°C 100kHz

● Frequency coefficient of rated ripple current

CV	Frequency	120Hz	300Hz	1kHz	10kHz ~
1000 > CV		0.50	0.64	0.83	1.00
1000 ≤ CV		0.67	0.79	0.91	1.00