


### Series Part Numbers

Connector Code _XX_	Description	P / N
AM	SMA Plug	W765FL-L-AM-AGDPU
AH	SMA Plug Reverse Polarity	W765FL-L-AH-AGDPU
MM	MMCX Straight Plug	W765FL-L-MM-AGDPU
RMM	MMCX Right Angle Plug	W765FL-L-RMM-AGDPU

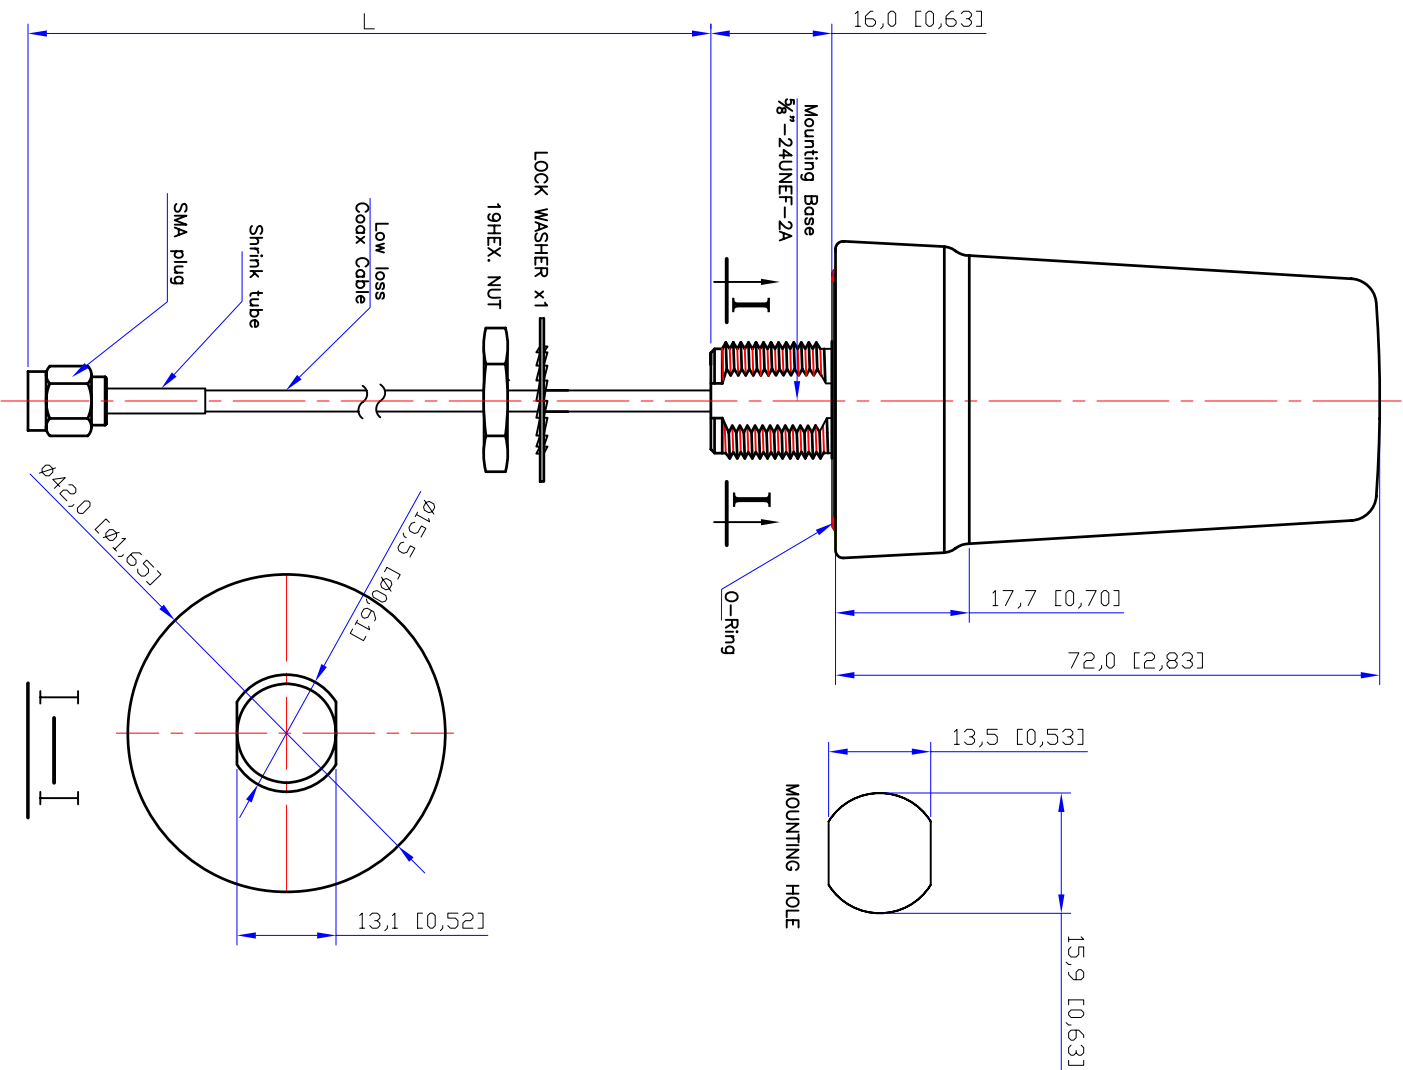

### Electrical Properties:

Frequency Range: 824~960 MHz/1710~2170 MHz  
 Impedance: 50Ω nominal  
 VSWR: <2.0:1  
 Gain: 2 dBi  
 Radiation: Omni  
 Polarization: Vertical

### Mechanical Properties:

Cable: Low loss cable J100  
 Cable Length: L to be defined in inches  
 Connector: XX to be specified by customer  
 Material: Polycarbonate(Black)  
 Body: Brass with Nickel plating  
 Base: Polycarbonate(Black)  
 Operation Temp.: -20°C to +65°C  
 Storage Temp.: -30°C to +75°C

This is a RoHS compliant product.

TITLE	Multi-Band External Antenna	Rev. Date	SHEET
UNIT	mm(In.)	05/23/07	1 OF 1
SCALE	DWG. NO.	W765FL-L-XX-AGDPU	
none			

# NEARSON