NOTES: UNLESS OTHERWISE SPECIFIED

1. CONSTRUCTION:
   HOUSING & PLUNGER: MOLDED MINLON 11C40 TYPE 6,6. AVAILABLE IN TEN COLORS.
   CONTACT BLADE: BERYLLIUM COPPER PER QQ–C–533. GOLD PLATED PER MIL–G–45204 B TYPE 1 0.00001 [0.000254] THICK MINIMUM.
   SPRING: STAINLESS STEEL TYPE 302.

2. PERFORMANCE:
   MAXIMUM CURRENT: 5.9 AMPS WITH A 77° TEMPERATURE RISE.
   MAXIMUM VOLTAGE: 5.4 KV
   MAXIMUM TEMPERATURE: 300°F (150°C) OVER SHORT TIME CYCLES.
   250°F (122°C) OVER EXTENDED TIME CYCLES.

3. FEATURES:
   HOOK FITS COMPONENTS UP TO ø0.040 [ø1.01].
   FIELD SERVICEABLE.

| REVISIONS | | | |
|---|---|---|---|
| LTR | DESCRIPTION | DATE | APPROVED |
| | | | |

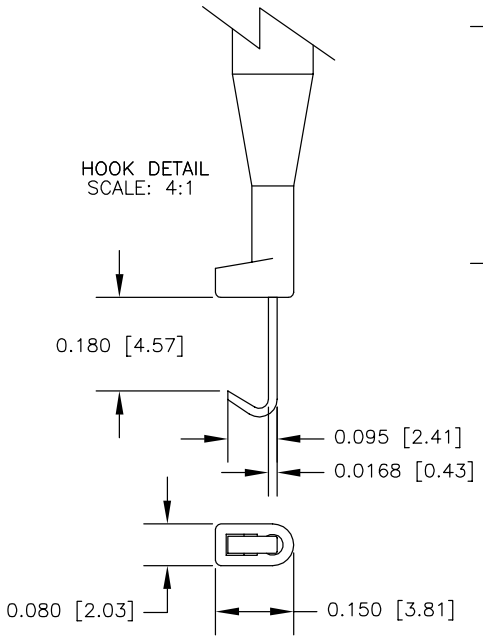


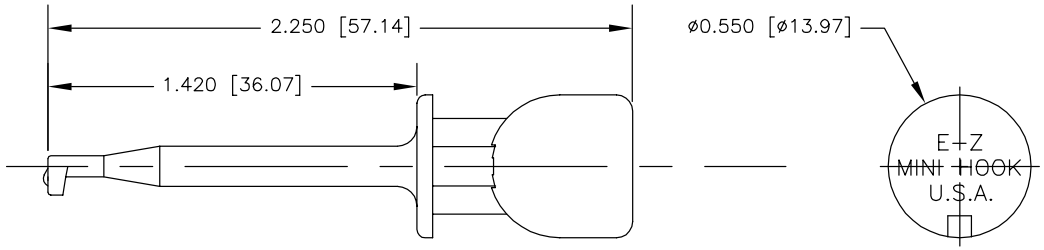


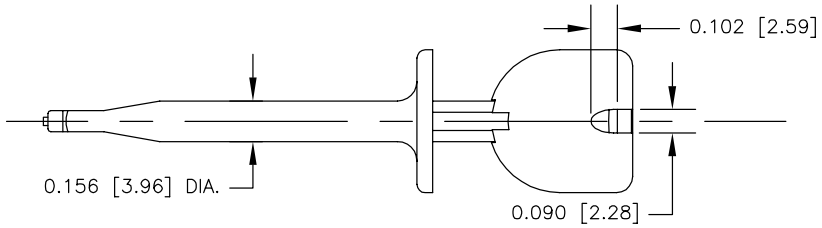


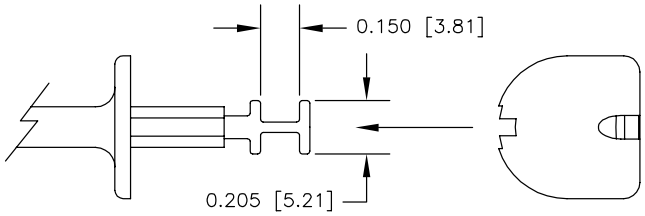




ACTUAL SIZE

| | | | | |
|---|---|---|---|---|
| | | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS ± DECIMALS .XX ± .XXX ± ANGLES ± | CONTRACT NO. | E-Z-HOOK® DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A. |
| | | | APPROVALS / DATE | |
| | | | DRAWN R.L. 6/09 | DESCRIPTION |
| | | MATERIAL SEE NOTE. | APPROVED BY | E–Z–MINI–HOOK TEST CONNECTOR HI–TEMP |
| | | FINISH SEE NOTE. | | SIZE B / CODE IDENT NO. 08505 / DRAWING NO. X100WX / R |
| NEXT ASSY | USED ON | | | |
| APPLICATION | | DO NOT SCALE DRAWING | | SCALE 2:1 / SHEET 1 OF 1 |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC.
MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.

Downloaded from Datasheet.su