



1. Dimensions:

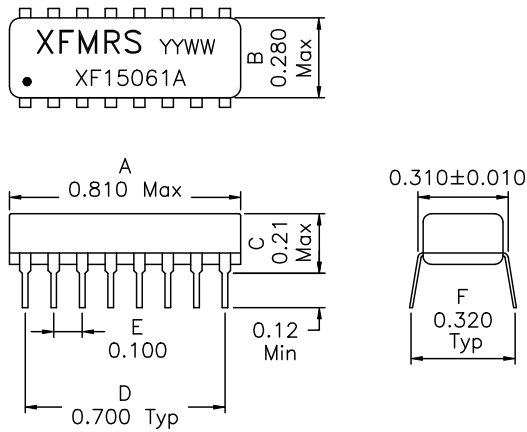

2. Schematic:

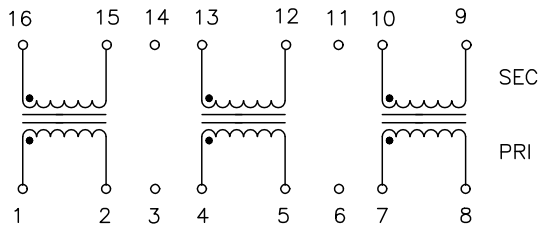

3. Electrical Specifications: @25°C

Isolation Voltage: 1500 Vrms (PRI to SEC)
 Turns Ratio: 1:1 ±2% (PRI:SEC)
 PRI OCL: 150uH ±20% @100KHz 50mV
 Cw/w: 10pf Max. @100KHz 50mV (PRI/SEC)
 PRI LL: 0.20uH Max. @100KHz 50mV (SEC Shorted)
 DC Resistance: 0.25 Ohms Max.
 ET Constant: 2.8 V-us Minimum
 Rise Time: 3.0ns Maximum

DOC.REV B/1

XFMRs Inc	Title: 10 BASE ISOLATION MAGNETICS	
	P/N: XF15061A	REV. B
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch	DWN. 廖玉坤	Sep-23-00
	CHK. 李清儿	Sep-23-00
	APP. Joe Huff	Sep-23-00

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION

SCALE 2.5:1 SHT 1 OF 1