




1. Mechanical Dimensions:

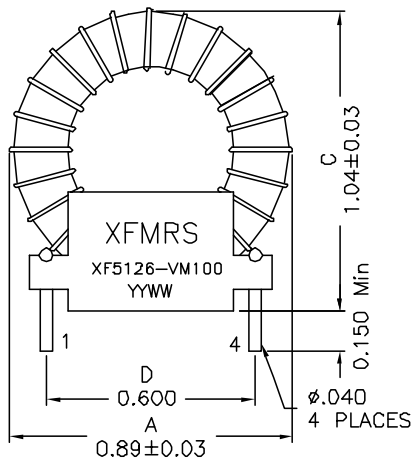

SUGGESTED FOOTPRINT
(Top View)

DOC REV: A/1

2. Schematic:



3. Electrical Specifications:

OCL: 51.2uH ± 8% @ 10KHz, 0.1V

DCR.: 0.035 Ohms Max.

Q: tbd Min @ 10KHz, 0.1V

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004" (0.102mm)
9. Moisture Sensitivity: Level 2

XFMRS Inc		Title: Toroidal Inductor	
UNLESS OTHERWISE SPECIFIED	P/N: XF5126-VM100		REV. A
	TOLERANCES: .xxx ±0.010	DWN.	李小锋 Aug-16-04
Dimensions in IN	CHK.	廖玉坤 Aug-16-04	
SHEET 1 OF 1	APP.	J Ng Aug-16-04	

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.