






NOTES: UNLESS OTHERWISE SPECIFIED

1. CONSTRUCTION:
HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
AVAILABLE IN TEN COLORS.
CONTACT BLADE: NICKEL SILVER ALLOY CA 770.
SPRING: STAINLESS STEEL TYPE 302.


2. PERFORMANCE:
MAXIMUM CURRENT: 13.1 AMPS WITH A 76°
TEMPERATURE RISE.
MAXIMUM VOLTAGE: 2.4 KV
MAXIMUM TEMPERATURE: 200°F (93°C)

3. FEATURES:
HOOK FITS COMPONENTS UP TO
Ø0.140" [3.56].
FIELD SERVICEABLE.

HOOK DETAIL
SCALE: 3:1

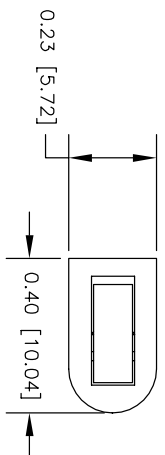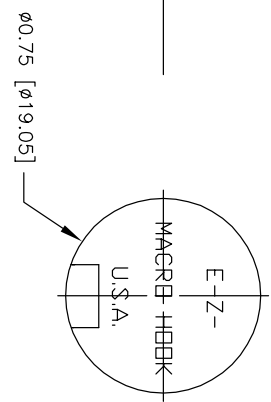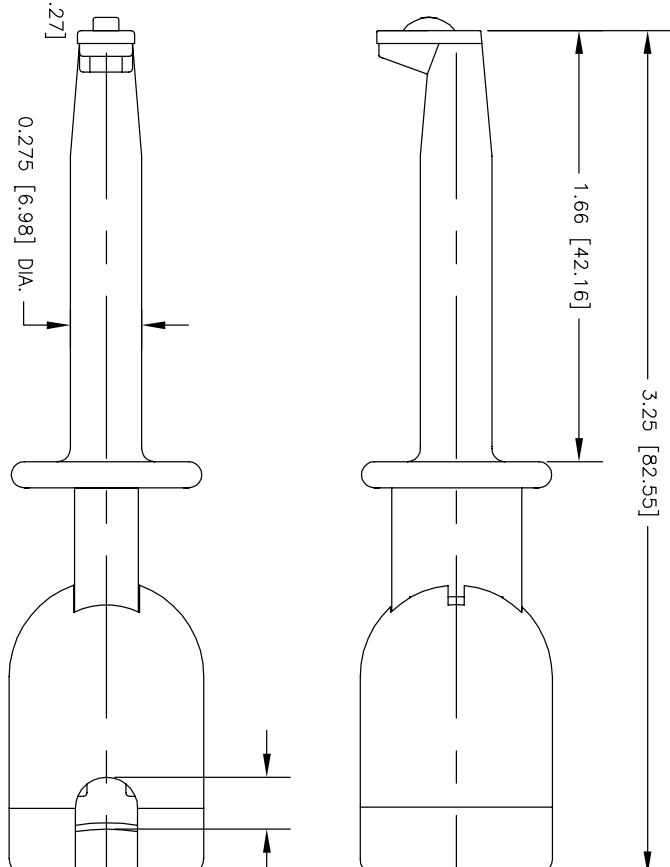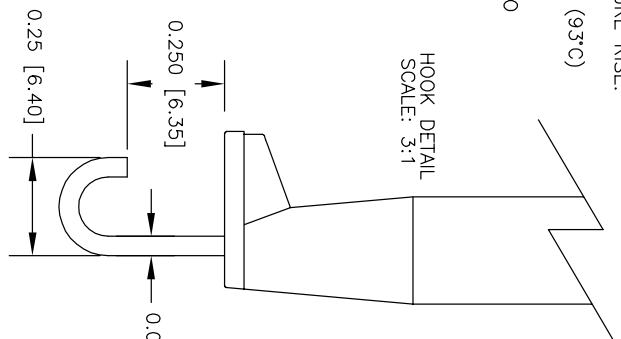

ACTUAL SIZE

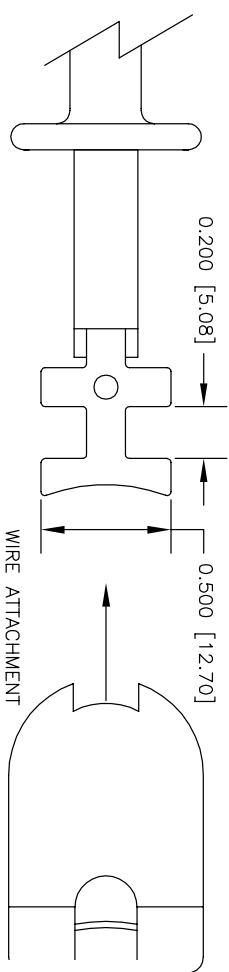

WIRE ATTACHMENT

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRACTIONS DECIMALS ANGLES ° ' " ° ' " ° ' " ° ' " ° ' "	CONTRACT NO.		E-Z-HOOK® DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS	DATE	
			DRAWN	6/09	
			APPROVED BY		
		MATERIAL		DESCRIPTION E-Z-MACRO HOOK TEST CONNECTOR	
		SEE NOTE.			
		FINISH			
		SEE NOTE.			
NEXT ASSY	USED ON				
APPLICATION		DO NOT SCALE DRAWING		SCALE 2:1	SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PERMISSION OF E-Z-HOOK. DIV. OF TEKTEST INC.
MAXIMUM TESTED RATING IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.