


**OMRON®**

  
LR21642 E41515

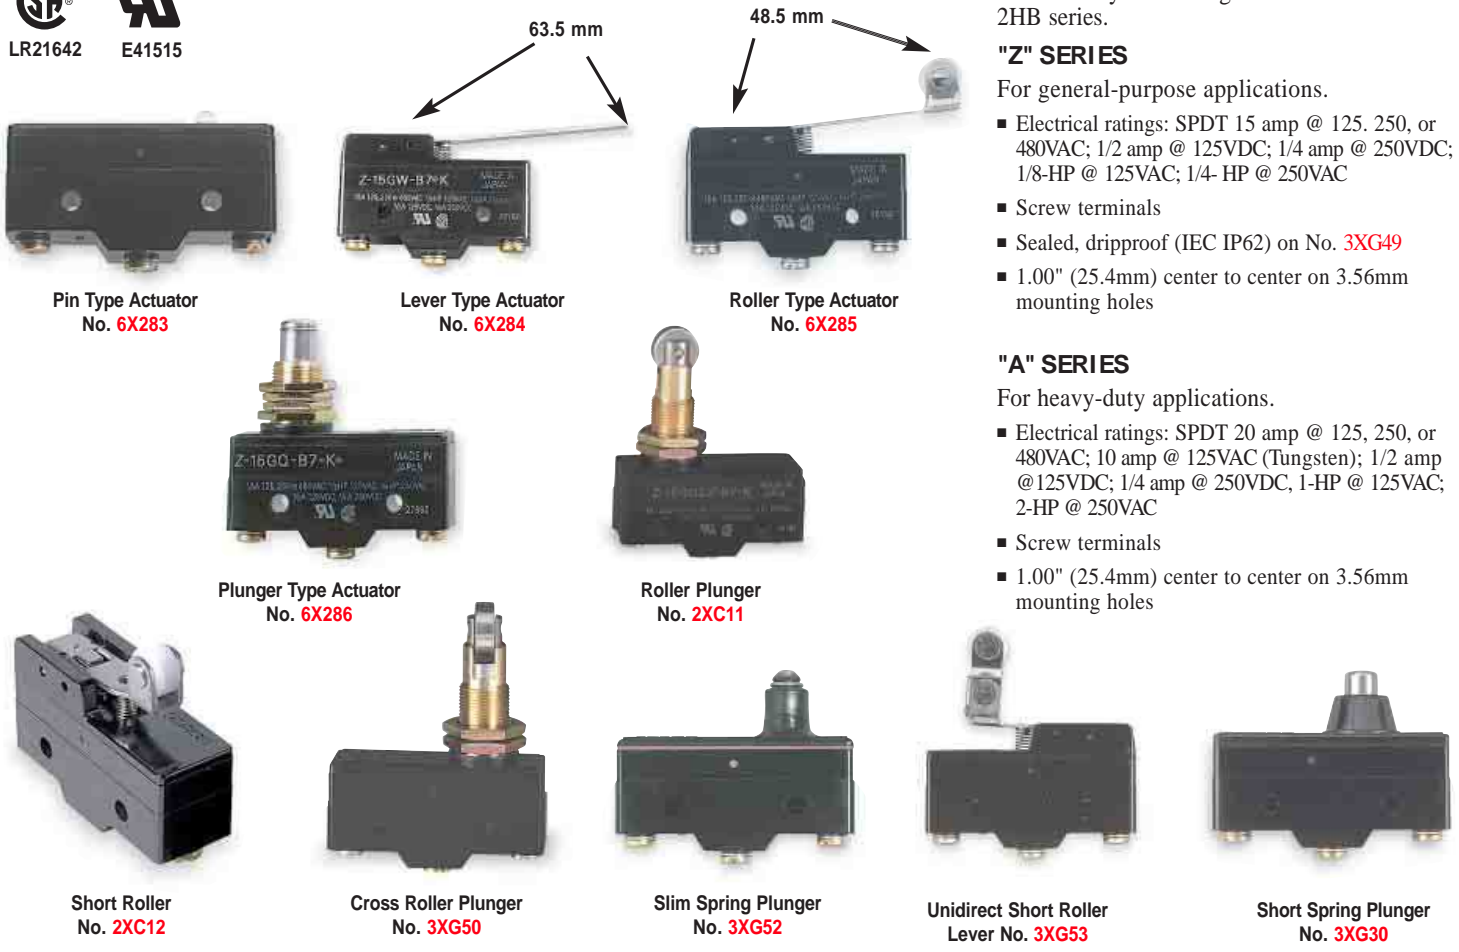

**Snap-Action Switches and Accessories**

Functionally interchangeable with Unimax 2HB series.

**"Z" SERIES**

For general-purpose applications.

- Electrical ratings: SPDT 15 amp @ 125, 250, or 480VAC; 1/2 amp @ 125VDC; 1/4 amp @ 250VDC; 1/8-HP @ 125VAC; 1/4-HP @ 250VAC
- Screw terminals
- Sealed, dripproof (IEC IP62) on No. 3XG49
- 1.00" (25.4mm) center to center on 3.56mm mounting holes

**"A" SERIES**

For heavy-duty applications.

- Electrical ratings: SPDT 20 amp @ 125, 250, or 480VAC; 10 amp @ 125VAC (Tungsten); 1/2 amp @ 125VDC; 1/4 amp @ 250VDC, 1-HP @ 125VAC; 2-HP @ 250VAC
- Screw terminals
- 1.00" (25.4mm) center to center on 3.56mm mounting holes

Type of Actuator	Overall Dimensions (In.)			Actuator Length (In.)	Operating Force (Oz.)		Movement Differential Travel (In.)	Pretravel (In.)	Overtravel (In.)	Omron Model	Stock No.	Each	Shpg. Wt.
	L	H	D		Make	Release							
<b>"Z" SERIES GENERAL PURPOSE, MAX. VOLTAGE 480VAC, 15A @ 120VAC</b>													
Pin	1.94	0.95	0.69	—	8.8 to 12.3	4.0	0.002	0.016	0.005	Z-15G-B7-K	<b>6X283</b>	<b>\$5.58</b>	0.1
Hinge Lever	1.94	1.16	0.69	2.50	2.5	0.5	0.050	0.220	0.220	Z-15GW-B7-K	<b>6X284</b>	<b>7.17</b>	0.1
Hinge Lever	1.94	1.16	0.69	2.50	0.99	0.12	0.050	0.394	0.220	Z-15GW4-B7-K	<b>3XG54</b>	<b>9.48</b>	0.1
Roller Lever	1.94	1.16	0.69	1.91	3.5	0.79	0.040	0.157	0.157	Z-15GW2-B7-K	<b>6X285</b>	<b>9.04</b>	0.1
Panel Mount Plunger	1.94	1.52	0.69	—	8.8 to 12.3	4.0	0.002	0.016	0.217	Z-15GQ-B7-K	<b>6X286</b>	<b>8.91</b>	0.1
Panel Mount Roller Plunger	1.94	1.61	0.69	—	8.8 to 12.3	4.0	0.002	0.016	0.141	Z-15GQ22-B7-K	<b>2XC11</b>	<b>15.59</b>	0.1
Short Roller	1.94	1.16	0.69	1.05	5.6	1.5	0.020	0.094	0.094	Z-15GW22-B7-K	<b>2XC12</b>	<b>8.94</b>	0.1
Short Spring Plunger	1.94	0.95	0.69	—	8.8 to 12.3	4.0	0.002	0.016	0.063	Z-15GD-B7-K	<b>3XG48</b>	<b>7.50</b>	0.1
Short Spring Plunger	1.94	0.95	0.69	—	19.1	4.0	0.002	0.071	0.063	Z-15GD55-B7-K	<b>3XG49</b>	<b>12.19</b>	0.1
Panel Mount Cross Roller Plunger	1.94	1.61	0.69	—	8.8 to 12.3	4.0	0.002	0.016	0.141	Z-15GQ21-B7-K	<b>3XG50</b>	<b>21.04</b>	0.2
Slim Spring Plunger	1.94	0.95	0.69	—	8.8 to 12.3	4.0	0.002	0.016	0.063	Z-15GS-B7-K	<b>3XG51</b>	<b>7.86</b>	0.1
Slim Spring Plunger	1.94	0.95	0.69	—	19.1	4.0	0.002	0.075	0.063	Z-15GS55-B7-K	<b>3XG52</b>	<b>14.59</b>	0.1
Unidirect Short Roller Lever	1.94	1.16	0.69	1.26	6.0	1.5	0.020	0.094	0.094	Z-15GW2277-B7-K	<b>3XG53</b>	<b>10.31</b>	0.1
<b>"A" SERIES HEAVY DUTY, MAX. VOLTAGE 480VAC, 20A @ 120VAC</b>													
Pin	1.94	0.95	0.69	—	14.1 to 22.0	10.0	0.008	0.051	0.010	A-20G-B7-K	<b>6X287</b>	<b>7.24</b>	0.1
Hinge Lever	1.94	1.16	0.69	2.50	2.5	0.50	0.094	0.626	0.157	A-20GV-B7-K	<b>6X289</b>	<b>7.45</b>	0.1
Roller Lever	1.94	1.16	0.69	1.91	3.2	0.50	0.087	0.472	0.094	A-20GV2-B7-K	<b>6X290</b>	<b>9.29</b>	0.1
Panel Mount Plunger	1.94	1.52	0.69	—	14.1 to 22.0	10.0	0.008	0.051	0.220	A-20GQ-B7-K	<b>6X288</b>	<b>12.33</b>	0.1
Short Roller	1.94	1.16	0.69	1.03	5.6	1.5	0.047	0.248	0.047	A-20GV22-B7-K	<b>2XC10</b>	<b>9.32</b>	0.1
Short Spring Plunger	1.94	0.95	0.69	—	14.1 to 22.0	10.0	0.008	0.051	0.118	A-20GD-B7-K	<b>3XG30</b>	<b>11.01</b>	0.1
<b>ACCESSORY</b>													
Side Mount, Dustproof PVC Terminal Enclosure, fits Z series above										AP-Z	<b>6C920</b>	<b>2.59</b>	0.1