


Pluggable PC board connectors with pin-strip headers

wiecon PCB

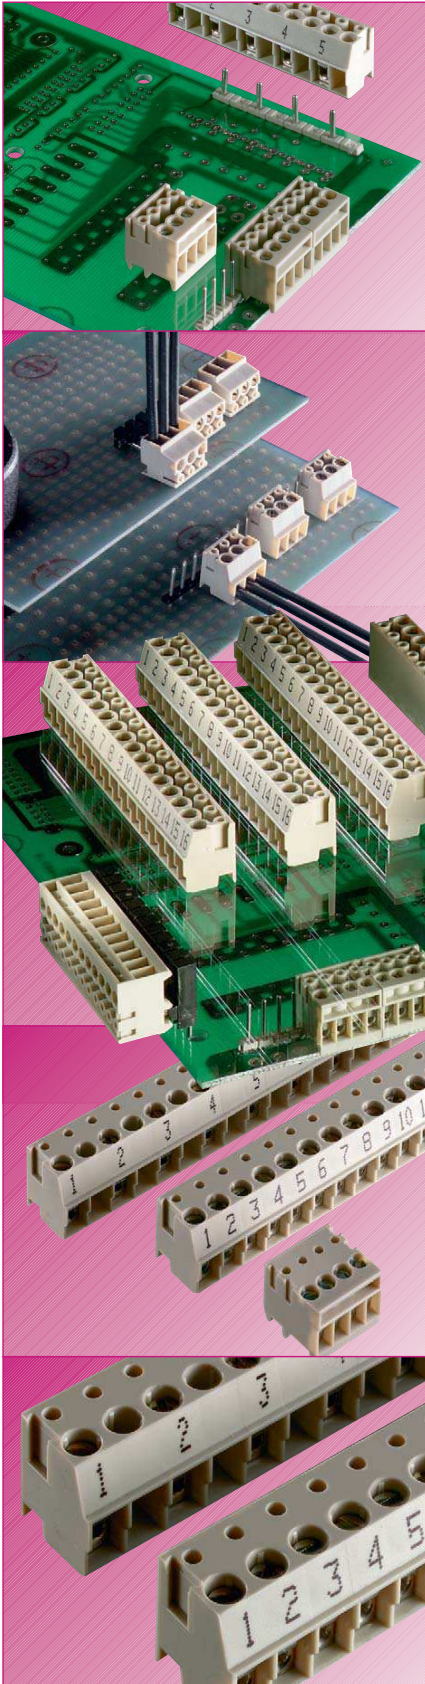

Pluggable connectors provide a simple 2-piece mateable connection between an external connector and the printed circuit board.

System features

- easy-to-operate screw termination
- installation and maintenance friendly
- quick disconnect
- pole configurations from 2 to 24 poles
- clear, straightforward connection
- mating in both horizontal and vertical orientations to the printed circuit board
- clamping body always with wire guard

Variety of types

- spacings: (3.5/7/5/10) mm
- 2 to 24 pole
- terminal strip headers with vertical or horizontal solder pins
- solder pin diameters available in: 0.8 mm, 1 mm and 1.3 mm others are on request

Marking

- smudge-proof inkjet marking directly on the plug
- clear, easily legible marking
- custom marking possible, consult factory
- cost-effective marking directly on the plug

Abbreviations for plastic materials:

- PA 66/6 = Polyamide 66/6
- PC = Polycarbonate
- PBT = Polybutylenterephthalate

Material

Insulating housings:

- use of high-quality polycarbonate for its excellent electrical, mechanical and chemical characteristics (see **facts** & DATA)

Metal parts:

- made of special alloys and/or special surface platings
- minimum feed through resistance
- high corrosion resistance
- secure, consistent clamping function
- clamping body: nickel-plated brass
- clamping screw: steel, zinc-plated and dichromated
- plug contact of type 8142 and ST 29: tin-plated bronze
- plug contact of type 8543: nickel-plated brass
- wire guard: tin-plated bronze

Pin-strip headers:

- Insulating part: made from high-quality Polyamide 66/6
- glass-fibre reinforcement for dimensional stability
- Metal parts: contact pin: tin plated brass

Note:

The information regarding cross sectional areas and connection types pertains to connections without ferrules.


The indicated rated current pertains to the maximum load of the PC board connector with a connected wire of the indicated rated cross section.

The rated voltage is indicated as per DIN VDE 0110 part 1 (IEC 60 664-1) – insulation coordination for electrical material in low voltage application – and refers to the delivered state of the PC board connector.

Before the PC board is fitted with connectors, an appropriate PC board must be selected and dimensioned accordingly (e.g. regarding tracking resistance of the printed circuit board, distances of the leads and solder joints). Furthermore, the ambient conditions under which the device is to be used (pollution degree) must be considered.

The indicated rated voltages will be valid for the complete module only if the printed circuit board and its connectors are correctly and carefully matched to each other.

wiecon

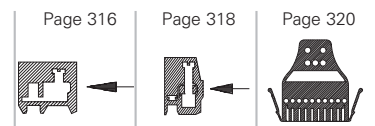



| | | Page 316 | Page 318 | Page 320 |
|------------------------|-----------------------|------------------|-------------------|--------------|
| Type | | 8543 | 8142 | ST 29 |
| Spacing | mm | 3.50/7.00 | 5.00/10.00 | 5.08 |
| Cross section | mm² | 1 | 2.5 | 1.5 |
| Number of poles | | 2 – 24 | 2 – 24 | 10 |

wiecon



wiecon

Spacing: 3.50 mm



Color: black
Solder pin \varnothing 0.8 mm
Bore hole \varnothing 1.0 mm

Color: black
Solder pin \varnothing 1.0 mm
Bore hole \varnothing 1.3 mm

Terminal strip header

horizontal mount



| Part no. | Part no. |
|---------------|---------------|
| Color: black | Color: black |
| Z5.532.0225.0 | Z5.532.3225.0 |
| Z5.532.0325.0 | Z5.532.3325.0 |
| Z5.532.0425.0 | Z5.532.3425.0 |
| Z5.532.0525.0 | Z5.532.3525.0 |
| Z5.532.0625.0 | Z5.532.3625.0 |
| Z5.532.0725.0 | Z5.532.3725.0 |
| Z5.532.0825.0 | Z5.532.3825.0 |
| Z5.532.0925.0 | Z5.532.3925.0 |
| Z5.532.1025.0 | Z5.532.4025.0 |
| Z5.532.1125.0 | Z5.532.4125.0 |
| Z5.532.1225.0 | Z5.532.4225.0 |
| Z5.532.1325.0 | Z5.532.4325.0 |
| Z5.532.1425.0 | Z5.532.4425.0 |
| Z5.532.1525.0 | Z5.532.4525.0 |
| Z5.532.1625.0 | Z5.532.4625.0 |

PC board connectors pluggable, spacings: 5.00/10.00 mm

wiecon PCB

Rated cross section:
2.5 mm²


Rated current:
8 A

Connection range:
0.14 – 4.0 mm² solid/
0.14 – 2.5 mm² fine stranded


200 V/4 kV/3 – Overvoltage category III
250 V/4 kV/2 – Overvoltage category II
1000 V/4 kV/1 – Overvoltage category I

Rated voltages: VDE 0110 (spacing 5 mm)
UL ratings
CSA ratings
Approvals

Spacing: 5.00 mm



Spacing: 10.00 mm




Type 8142

plug-in 90° to wire entry


No. 22 – 12 AWG 300 V 15 A
No. 22 – 12 AWG 300 V 15 A



Spacing: 5.00 mm



Spacing: 10.00 mm



Color: gray Solder pin Ø 1.0 mm Bore hole Ø 1.3 mm
Color: black Solder pin Ø 1.3 mm Bore hole Ø 1.6 mm

Terminal strip header


vertical mount



| Std. pack | G | T | Poles | Part no. | Part no. | Part no. | Part no. |
|---|----|----|-------|--|---------------|---------------|---------------|
| Spacing: 5.00 mm | | | | unmarked | marked | Color: gray | Color: black |
| 100 | 10 | 5 | 2 | 25.602.2253.0 | 25.600.2253.0 | Z5.530.0225.0 | Z5.530.3225.0 |
| 100 | 15 | 10 | 3 | 25.602.2353.0 | 25.600.2353.0 | Z5.530.0325.0 | Z5.530.3325.0 |
| 50 | 20 | 15 | 4 | 25.602.2453.0 | 25.600.2453.0 | Z5.530.0425.0 | Z5.530.3425.0 |
| 50 | 25 | 20 | 5 | 25.602.2553.0 | 25.600.2553.0 | Z5.530.0525.0 | Z5.530.3525.0 |
| 50 | 30 | 25 | 6 | 25.602.2653.0 | 25.600.2653.0 | Z5.530.0625.0 | Z5.530.3625.0 |
| 50 | 35 | 30 | 7 | 25.602.2753.0 | 25.600.2753.0 | Z5.530.0725.0 | Z5.530.3725.0 |
| 50 | 40 | 35 | 8 | 25.602.2853.0 | 25.600.2853.0 | Z5.530.0825.0 | Z5.530.3825.0 |
| 50 | 45 | 40 | 9 | 25.602.2953.0 | 25.600.2953.0 | Z5.530.0925.0 | Z5.530.3925.0 |
| 50 | 50 | 45 | 10 | 25.602.3053.0 | 25.600.3053.0 | Z5.530.1025.0 | Z5.530.4025.0 |
| 50 | 55 | 50 | 11 | 25.602.3153.0 | 25.600.3153.0 | Z5.530.1125.0 | Z5.530.4125.0 |
| 50 | 60 | 55 | 12 | 25.602.3253.0 | 25.600.3253.0 | Z5.530.1225.0 | Z5.530.4225.0 |
| 50 | 65 | 60 | 13 | 25.602.3353.0 | 25.600.3353.0 | Z5.530.1325.0 | Z5.530.4325.0 |
| 50 | 70 | 65 | 14 | 25.602.3453.0 | 25.600.3453.0 | Z5.530.1425.0 | Z5.530.4425.0 |
| 50 | 75 | 70 | 15 | 25.602.3553.0 | 25.600.3553.0 | Z5.530.1525.0 | Z5.530.4525.0 |
| 50 | 80 | 75 | 16 | 25.602.3653.0 | 25.600.3653.0 | Z5.530.1625.0 | Z5.530.4625.0 |
| 17 to 24pole upon request | | | | | | | |
| Spacing: 10.00 mm | | | | unmarked | marked | | |
| 50 | 20 | 10 | 2 | 25.603.1253.0 | 25.601.1253.0 | Z5.530.6225.0 | Z5.530.8225.0 |
| 50 | 30 | 20 | 3 | 25.603.1353.0 | 25.601.1353.0 | Z5.530.6325.0 | Z5.530.8325.0 |
| 50 | 40 | 30 | 4 | 25.603.1453.0 | 25.601.1453.0 | Z5.530.6425.0 | Z5.530.8425.0 |
| 50 | 50 | 40 | 5 | 25.603.1553.0 | 25.601.1553.0 | Z5.530.6525.0 | Z5.530.8525.0 |
| 50 | 60 | 50 | 6 | 25.603.1653.0 | 25.601.1653.0 | Z5.530.6625.0 | Z5.530.8625.0 |
| 50 | 70 | 60 | 7 | 25.603.1753.0 | 25.601.1753.0 | Z5.530.6725.0 | Z5.530.8725.0 |
| 50 | 80 | 70 | 8 | 25.603.1853.0 | 25.601.1853.0 | Z5.530.6825.0 | Z5.530.8825.0 |
| 9 to 12pole upon request | | | | | | | |
| Rated voltages: (spacing: 10.00 mm): VDE 0110 500 V/8 kV/3 – Overvoltage category III 800 V/8 kV/2 – Overvoltage category II 1000 V/8 kV/1 – Overvoltage category I | | | | Material: PC board connectors Insulating housing: PC gray, UL 94-V-0 Clamping body: nickel-plated brass Clamping screws: zinc-plated steel Contact spring: tin-plated bronze | | | |
| | | | | Terminal strip header Insulating part: PA 66/6, glass-fibre reinforced gray or black, UL 94-V-0 Contact pin: tin-plated brass | | | |

**PC board connectors,
pluggable, spacing: 5.08 mm**

wiecon PCB





Rated cross section:
1.5 mm²

Rated current:
10 A

Connection range:
0.14 – 2.5 mm² solid/
0.14 – 1.5 mm² fine stranded

200 V/4 kV/3 – Overvoltage category III
250 V/4 kV/2 – Overvoltage category II
1000 V/4 kV/1 – Overvoltage category I

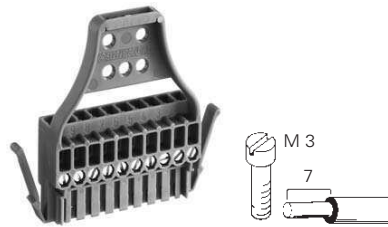

Statement of Conformity/CH

**TOP connector, 10pole
Type ST 29/10 BC**

plug-in 90° to wire entry
1.5 mm²

No. 22 – 14 AWG 250 V 10 A
No. 22 – 14 AWG 300 V 5 A
No. 22 – 14 AWG 300 V 5 A



Terminal strip header



vertical mount


(if all terminals carry current) 250 V 10 A
300 V 5 A



Rated voltages: VDE 0110
EN 60 998-1, EN 60 998-2-1
UL ratings
CSA ratings
Approvals

| | Poles | Type | Part no. | Std. pack | Type | Part no. | Std. pack |
|---|-------|-------------|---------------|-----------|------|---------------|-----------|
| Spacing: 5.08 mm | | | | | | | |
| | 10 | ST 29/10 BC | 93.101.2053.0 | 50 | | Z5.599.9025.0 | 50 |
| Material: PC board connectors Insulating housing: PA 66/6 gray, UL 94-V-2 Clamping body: nickel-plated brass Clamping screws: zinc-plated steel Contact spring: tin-plated bronze | | | | | | | |
| Terminal strip header Insulating part: PBT, glass-fibre reinforced gray, UL 94-V-0 Contact pin: tin-plated brass | | | | | | | |

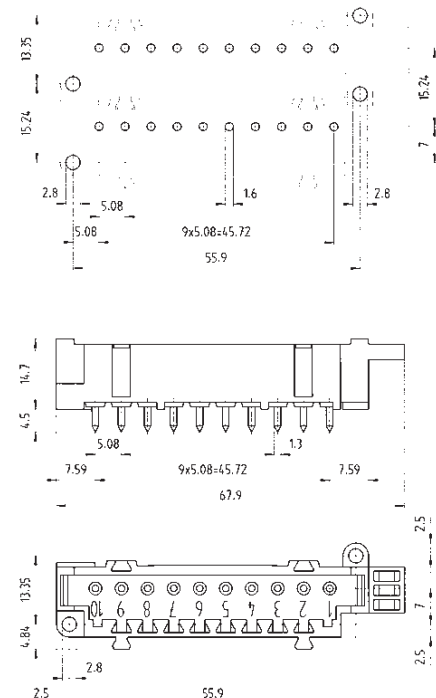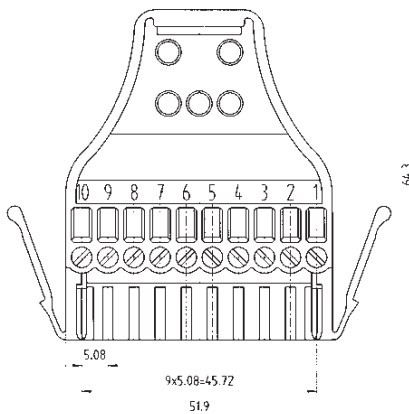

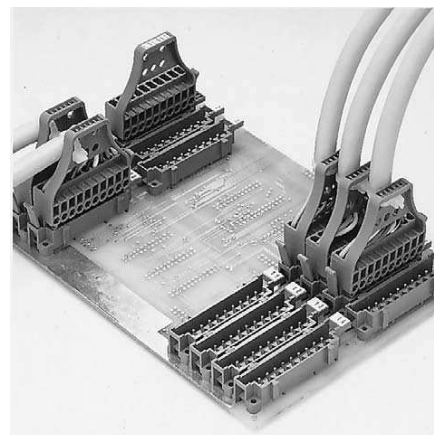

Pluggable terminal strip header with TOP connection

A special version of the TOP system is the 5.08 mm spaced terminal strip header which can be soldered into a PC board. Two mounting holes are available in order to fix the terminal strip header.

- Strain relief
- Locking device
- Marking capabilities

By means of dove-tail guides, several terminal strip headers can be snapped together, while only the outer headers of this group must be mechanically fixed on the printed circuit board. In order to guarantee the necessary stability on the printed circuit board, it is not recommended to exceed four terminal strip headers in a group.

The terminal TOP connector and terminal strip header each possess eight slots for coding to prevent mismatching the TOP plug-in system.

| Accessories | Type | Part no. | Std. pack |
|--|---------|---------------|-----------|
| Coding pieces, 10 codings each per strip | | 05.599.8053.0 | 100 |
| Marking tag, unmarked | 9705 A | 04.242.0850.0 | 500 |
| marked | 9705 AB | 04.842.0850.0 | 500 |
| <p>Coding plan L = PC board connector S = terminal strip header</p> <p>Combination 01 SL L L L L L L S</p> <p>Combination 02 SL L L L L L SL</p> <p>Combination 03 SL L L L S L L</p> <p>Combination 04 SL L L S L L L</p> <p>Combination 05 SL L S L L L L</p> <p>Combination 06 SL S L L L L L</p> <p>Combination 07 SS L L L L L L</p> <p>Combination 08 L S L L L L L L S</p> <p>Combination 09 L S L L L L L SL</p> <p>Combination 10 L S L L L S L L</p> <p>Combination 11 L S L L S L L L</p> <p>Combination 12 L S L S L L L L</p> <p>Combination 13 L S S L L L L L</p> <p>Combination 14 L L S L L L L L S</p> <p>etc.</p> | | | |