

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **78395-0001**
Status: **Active**
Description: 0.80mm, 1.27mm Micro SAS Receptacle, Right Angle, SMT, 0.76µm Gold (Au) Plating, 25 Circuits, for 1.00mm PCB Thickness, Halogen free, Lead-Free

Documents:

[3D Model](#)
[Drawing \(PDF\)](#)

[Product Specification PS-78395-001 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
 UL E29179

General

Product Family I/O Connectors
 Series 78395
 Application Board-to-Board
 Component Type Receptacle
 Product Name Micro SAS
 Type N/A
 UPC 883906495442

Physical

Boot Color N/A
 Circuits (Loaded) 25
 Circuits (maximum) 25
 Circuits Detail Signal 14, Power 9, Sideband 2
 Color - Resin Black
 Durability (mating cycles max) 500
 Flammability 94V-0
 Gender Female
 Keying to Mating Part Yes
 Lock to Mating Part None
 Material - Metal Copper Alloy
 Material - Plating Mating Gold
 Material - Plating Termination Tin
 Material - Resin High Temperature Thermoplastic
 Net Weight 1.902/g
 Number of Rows 2
 Orientation Right Angle
 PCB Locator Yes
 PCB Retention Yes
 PCB Thickness - Recommended 1.00mm
 Packaging Type Tray
 Panel Mount Yes
 Pitch - Mating Interface 0.80mm, 1.27mm
 Pitch - Termination Interface 0.80mm, 1.27mm
 Plating min - Mating 0.762µm
 Plating min - Termination 2.540µm
 Polarized to Mating Part Yes
 Polarized to PCB Yes
 Ports 2
 Temperature Range - Operating 0°C to +55°C
 Termination Interface: Style Surface Mount
 Waterproof / Dustproof No
 Wire Size AWG N/A

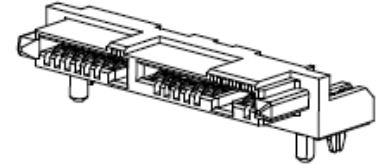


image - Reference only

Series

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Low-Halogen Status

Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

78395Series

Mates With

78394 , 78528 Micro SAS Plugs

Electrical

Current - Maximum per Contact	1.5A
Voltage - Maximum	30V

Solder Process Data

Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	260

Material Info**Reference - Drawing Numbers**

Electrical Model Document	EE-78395-001
Product Specification	PS-78395-001
Sales Drawing	SD-78395-001

This document was generated on 02/07/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION