


GRM1535C1H330J DD5#

"#" indicates a package specification code.



< List of part numbers with package codes >
 GRM1535C1H330J DD5D , GRM1535C1H330J DD5J

Shape



L size	1.0 ± 0.05mm
W size	0.5 ± 0.05mm
T size	0.3 ± 0.03mm
External terminal width e	0.1 to 0.3mm
Distance between external terminals g	0.4mm min.
Size code in mm(inch)	1005 (0402)

Specifications

Capacitance	33pF ± 5%
Rated voltage	50Vdc
Temperature characteristics (complied standard)	C0G(EIA)
Temperature coefficient	0± 30ppm/°C
Temperature range of temperature characteristics	25 to 125°C
Operating temperature range	-55 to 125°C


References

Packaging	Specifications	Minimum quantity
D	φ 180mm Paper taping	10000
J	φ 330mm Paper taping	50000
	Mass (typ.)	
1 piece		1.0mg
φ 180mm Reel		88g


Attention

- This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.


Frequency characteristics (ESR, Impedance)

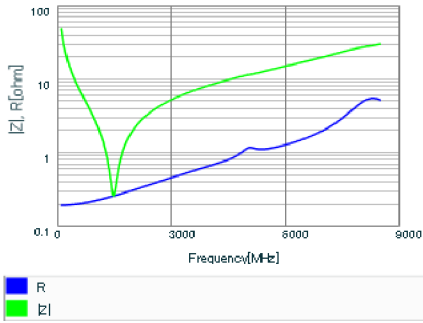


S parameter (Smith chart S11)



AC voltage characteristics

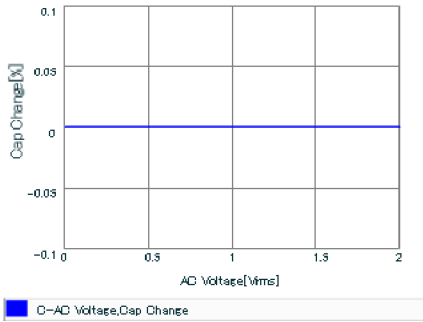

Capacitance - temperature characteristics

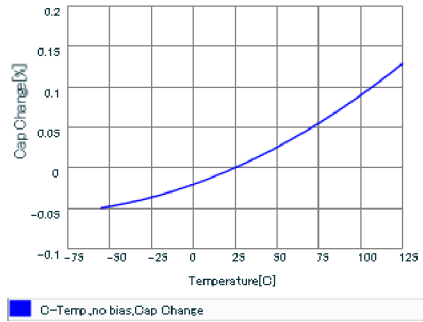

This PDF data has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.