

VOLTAGE PROTECTION FOR 2-, 3-, OR 4-CELL Li-Ion BATTERIES (2nd-LEVEL PROTECTION)

Check for Samples: [bq29410](#), [bq29411](#), [bq29412](#), [bq29413](#), [bq29414](#), [bq29415](#), [bq29419](#)

FEATURES

- 2-, 3-, or 4-Cell Secondary Protection
- Low Power Consumption $I_{CC} < 2 \mu A$ [$V_{CELL(ALL)} < V_{(PROTECT)}$]
- Fixed High Accuracy Overvoltage Protection Threshold
 - bq29410 = 4.35 V
 - bq29411 = 4.40 V
 - bq29412 = 4.45 V
 - bq29413 = 4.50 V
 - bq29414 = 4.55 V
 - bq29415 = 4.60 V
 - bq29419 = 4.30 V
- Programmable Delay Time of Detection
- High Power Supply Ripple Rejection
- Stable During Pulse Charge Operation

APPLICATIONS



- 2nd-Level Overvoltage Protection in Li-Ion Battery Packs in:
 - Notebook Computers
 - Portable Instrumentation
 - Portable Equipment

DESCRIPTION

The bq2941x is a secondary overvoltage protection IC for 2-, 3-, or 4-cell lithium-ion battery packs that incorporates a high-accuracy precision overvoltage detection circuit. It includes a programmable delay circuit for overvoltage detection time.

FUNCTION

Each cell in a multiple-cell pack is compared to an internal reference voltage. If one cell reaches an overvoltage condition, the protection sequence begins. The bq2941x device starts charging an external capacitor through the CD pin. When the CD pin voltage reaches 1.2 V, the OUT pin changes from a low level to a high level.

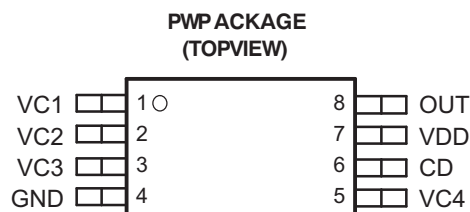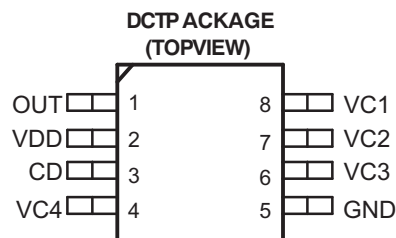

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

ORDERING INFORMATION⁽¹⁾

| T _A | V _(PROTECT) ⁽²⁾ | PACKAGE ⁽³⁾ | | | |
|----------------|---------------------------------------|------------------------|--------|--------------------------|----------------------------|
| | | MSOP (DCT) | SYMBOL | SSOP (PW) | |
| –40°C to 110°C | 4.30 V | bq29419DCTR | CJQ | bq29419PWG4 | bq29419PWRG4 |
| | | bq29419DCTT | | | |
| | 4.35 V | bq29410DCT3R | CJG | bq29410PW bq29410PWG4 | bq29410PWR bq29410PWRG4 |
| | | bq29410DCTR | | | |
| | | bq29410DCTT | | | |
| | 4.40 V | bq29411DCT3R | CJH | bq29411PW bq29411PWG4 | bq29411PWR bq29411PWRG4 |
| | | bq29411DCTR | | | |
| | | bq29411DCTT | | | |
| | 4.45 V | bq29412DCT3R | CJJ | bq29412PW bq29412PWG4 | bq29412PWR bq29412PWRG4 |
| | | bq29412DCTR | | | |
| | | bq29412DCTT | | | |
| | 4.50 V | bq29413DCTR | CJk | bq29413PW | bq29413PWR |
| | | bq29413DCTT | | | |
| | 4.55 V | bq29414DCTR | CJL | bq29414PW | bq29414PWR |
| | | bq29414DCTT | | | |
| | 4.60 V | bq29415DCTR | CJM | bq29415PW | bq29415PWR |
| | | bq29415DCTT | | | |

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI website at www.ti.com.
- (2) Contact your local Texas Instruments representative or sales office for alternative overvoltage threshold options.
- (3) The "R" suffix indicates tape-and-reel packaging.

ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range unless otherwise noted^{(1) (2)}

| | | UNIT |
|---|--|------------------------------|
| Supply voltage range | VDD | –0.3 V to 28 V |
| Input voltage range | VC1, VC2, VC3, VC4 | –0.3 V to 28 V |
| | VC1 TO VC2, VC2 TO VC3, VC3 TO VC4, VC4 TO GND | –0.3 V to 8 V |
| Output voltage range | OUT | –0.3 V to 28 V |
| | CD | –0.3 V to 28 V |
| Continuous total power dissipation | | See Dissipation Rating Table |
| Storage temperature range, T _{stg} | | –65°C to 150°C |
| Lead temperature (soldering, 10 s) | | 300°C |

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltages are with respect to ground of this device except the differential voltage of VC1-VC2, VC2-VC3, VC3-VC4, and VC4-GND.

PACKAGE DISSIPATION RATINGS

| PACKAGE | T _A = 25°C POWER RATING | DERATING FACTOR ABOVE T _A = 25°C | T _A = 70°C POWER RATING | T _A = 85°C POWER RATING |
|---------|---------------------------------------|--|---------------------------------------|---------------------------------------|
| DCT | 412 mW | 3.3 mW/°C | 264 mW | 214 mW |
| PW | 525 mW | 4.2 mW/°C | 336 mW | 273 mW |

RECOMMENDED OPERATING CONDITIONS

| | | MIN | NOM | MAX | UNIT | |
|-------------|-------------------------------------|---------------------------------------|-----|-----|--------------|----|
| V_{DD} | Supply voltage | 4 | | 25 | V | |
| V_I | Input voltage range | VC1, VC2, VC3, VC4 | | | 0 | 25 |
| | | VCn – VC (n=1, (n=1, 2, 3), VC4 – GND | | | 0 | 5 |
| $t_{d(CD)}$ | Delay time capacitance | 0.22 | | | μ F | |
| R_{IN} | Voltage-monitor filter resistance | 100 | 1k | | Ω | |
| C_{IN} | Voltage-monitor filter capacitance | 0.01 | 0.1 | | μ F | |
| R_{VD} | Supply-voltage filter resistance | 0 | | 1 | k Ω | |
| C_{VD} | Supply-voltage filter capacitance | 0.1 | | | μ F | |
| T_A | Operating ambient temperature range | –40 | | 110 | $^{\circ}$ C | |

ELECTRICAL CHARACTERISTICS

 over recommended operating free-air temperature range, $T_A = 25^{\circ}$ C (unless otherwise noted)

| PARAMETER | TEST CONDITION | MIN | NOM | MAX | UNIT | | | |
|-----------------|----------------------------------|--|-----|-----|------|-----|---------|---------|
| $V_{(OA)}$ | Overvoltage detection accuracy | $T_A = 25^{\circ}$ C | | | 25 | 35 | | |
| | | $T_A = -20^{\circ}$ C to 85° C | | | 25 | 50 | | |
| | | $T_A = -40^{\circ}$ C to 110° C | | | | 80 | | |
| $V_{(PROTECT)}$ | Overvoltage detection voltage | bq29410 | | | 4.35 | V | | |
| | | bq29411 | | | 4.40 | | | |
| | | bq29412 | | | 4.45 | | | |
| | | bq29413 | | | 4.50 | | | |
| | | bq29414 | | | 4.55 | | | |
| | | bq29415 | | | 4.60 | | | |
| | | bq29419 | | | 4.30 | | | |
| V_{hys} | Overvoltage detection hysteresis | bq29410/11/12/13/14/15 | | | 320 | mV | | |
| | | bq29419 | | | 250 | | 320 | 450 |
| I_{IN} | Input current | V2, V3, VC4 input, $V_{DD} = VC1$ VC1 = VC2 = VC3 = VC4 = 3.5 V (see Figure 1) | | | | 0.3 | μ A | |
| t_{D1} | Overvoltage detection delay time | $V_{DD} = VC1$, CD = 0.22 μ F | | | 1 | 1.5 | 2 | S |
| $I_{(CD_dis)}$ | CD GND clamp current | $V_{DD} = VC1$, CD = 1 V | | | 5 | 12 | | μ A |
| I_{CC} | Supply current | $V_{DD} = VC1$, VC1–VC2 = VC2–VC3 = VC3–VC4 = VC4–GND = 3.5 V (see Figure 1) | | | 2 | 3 | μ A | |
| | | $V_{DD} = VC1$, VC1–VC2 = VC2–VC3 = VC3–VC4 = VC4–GND = 2.3 V (see Figure 1) | | | 1.5 | 2.5 | | |
| $V_{(OUT)}$ | OUT pin drive voltage | VC1–VC2 = VC2–VC3 = VC3–VC4 = VC4–GND = $V_{(PROTECT)Max}$, $V_{DD} = 14$ V, $I_{OH} = 0$ mA | | | | 7 | V | |
| | | VC1 = VC2 = VC3 = VC4 = $V_{(PROTECT)Max}$, $V_{DD} = 4.3$ V, $T_A = 0^{\circ}$ C to 70° C, $I_{OH} = 40$ μ A | | | 1.5 | 2 | | 2.5 |
| I_{OH} | High-level output current | OUT = 3 V, VC1–VC2 = VC2–VC3 = VC3–VC4 = VC4–GND = $V_{(PROTECT)Max}$, $V_{DD} = 14$ V | | | | | –1 | mA |
| I_{OL} | Low-level output current | OUT = 0.1 V, $V_{DD} = VC1$, VC1–VC2 = VC2–VC3 = VC3–VC4 = VC4–GND = 3.5 V | | | 5 | | | μ A |


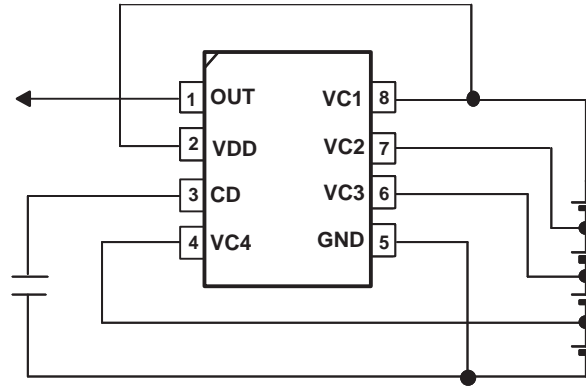


Figure 1. I_{CC} , I_{IN} Measurement (DCT Package)

Terminal Functions

| TERMINAL | | | DESCRIPTION |
|------------|------------|------|---|
| MSOP (DCT) | TSSOP (PW) | NAME | |
| 8 | 1 | VC1 | Sense voltage input for most positive cell |
| 7 | 2 | VC2 | Sense voltage input for second most positive cell |
| 6 | 3 | VC3 | Sense voltage input for third most positive cell |
| 5 | 4 | GND | Ground pin |
| 4 | 5 | VC4 | Sense voltage input for least positive cell |
| 3 | 6 | CD | An external capacitor is connected to determine the programmable delay time |
| 2 | 7 | VDD | Power supply |
| 1 | 8 | OUT | Output |

FUNCTIONAL BLOCK DIAGRAM

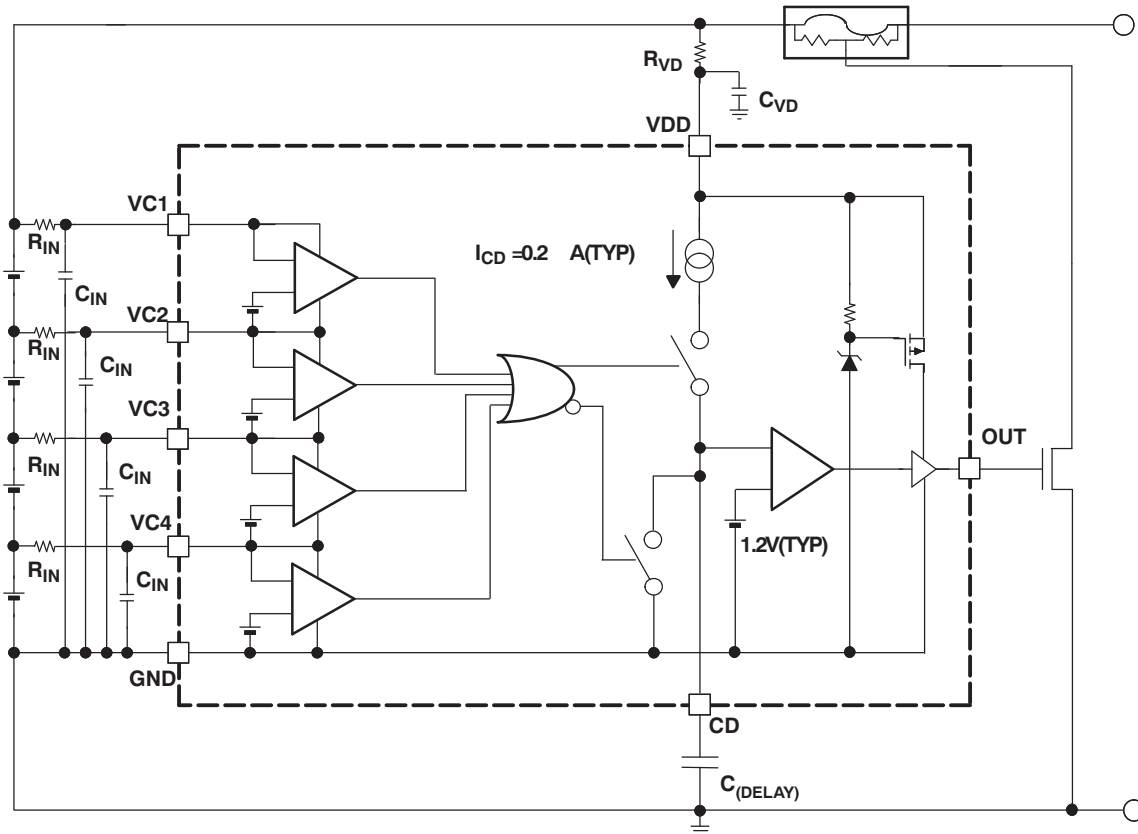

OVERVOLTAGE PROTECTION

When one of the cell voltages exceeds $V_{(PROTECT)}$, an internal current source begins to charge the capacitor, $C_{(DELAY)}$, connected to the CD pin. If the voltage at the CD pin, V_{CD} , reaches 1.2 V, the OUT pin is activated and transitions high. An externally connected NCH FET is activated and blows the external fuse in the positive battery rail; see the functional block diagram.

If all cell voltages fall below $V_{(PROTECT)}$ before the voltage at pin CD reaches 1.2 V, the delay time does not run out. An internal switch clamps the CD pin to GND and discharges the capacitor, $C_{(DELAY)}$, and secures the full delay time for the next occurring overvoltage event.

Once the pin OUT is activated, it transitions back from high to low after all battery cells reach $V_{(PROTECT)} - V_{hys}$.

DELAY TIME CALCULATION

The delay time is calculated as follows:

$$t_d = \frac{1.2 \text{ V} \times C_{(DELAY)}}{I_{CD}}$$

$$C_{(DELAY)} = \frac{t_d \times I_{CD}}{1.2 \text{ V}}$$

Where $I_{(CD)}$ = CD current source = 0.18 μ A

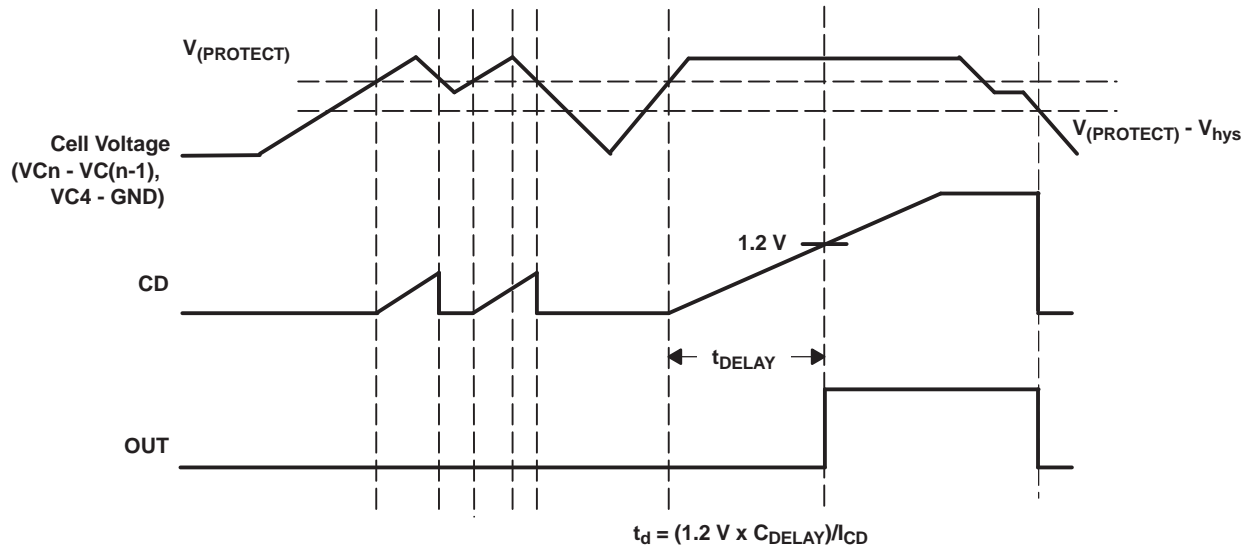


Figure 2. Timing for Overvoltage Sensing

APPLICATION INFORMATION

BATTERY CONNECTIONS

The following diagrams show the DCT package device in different cell configurations.

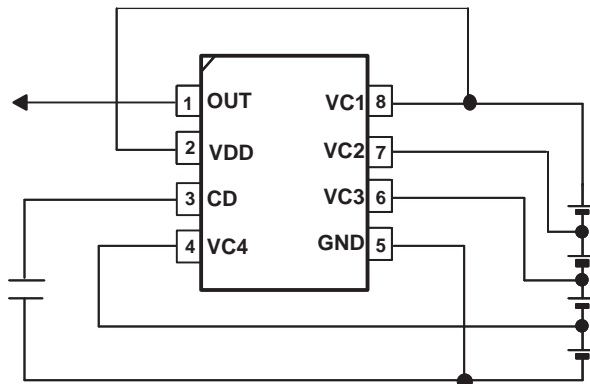
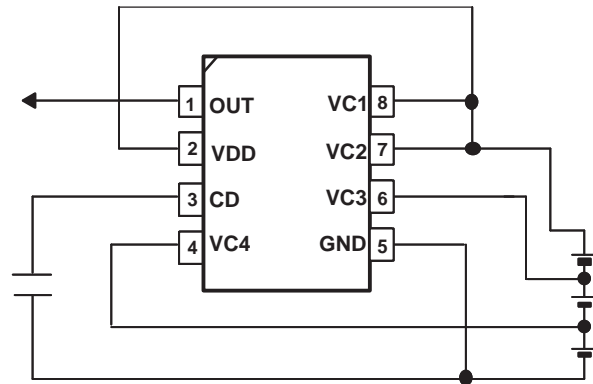


Figure 3. 4-Series Cell Configuration



**Figure 4. 3-Series Cell Configuration
(Connect together VC1 and VC2)**

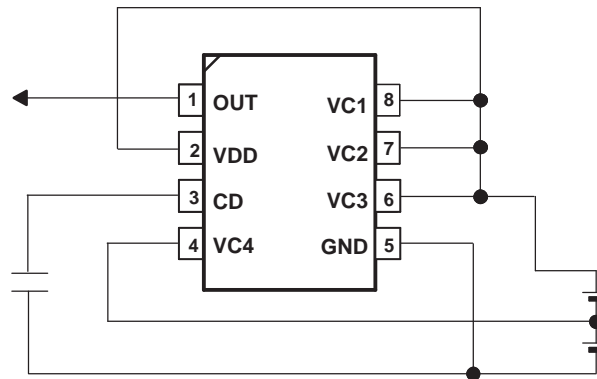


Figure 5. 2-Series Cell Configuration

CELL CONNECTIONS

To prevent incorrect output activation, the following connection sequences must be used.

4-Series Cell Configuration

- VC1(=VDD) → VC2 → VC3 → VC4 → GND or
- GND → VC4 → VC3 → VC2 → VC1(=VDD)

3-Series Cell Configuration

- VC1(=VC2=VDD) → VC3 → VC4 → GND or
- GND → VC4 → VC3 → VC1(=VC2=VDD)

2-Series Cell Configuration

- VC1(=VC2=VC3=VDD) → VC4 → GND or
- GND → VC4 → VC1(=VC2=VC3=VDD)

PACKAGING INFORMATION

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan (2) | Lead/Ball Finish (6) | MSL Peak Temp (3) | Op Temp (°C) | Device Marking (4/5) | Samples |
|------------------|---------------|--------------|-----------------|------|-------------|-------------------------|-------------------------|----------------------|--------------|-------------------------|---------|
| BQ29410DCT3R | NRND | SM8 | DCT | 8 | 3000 | Pb-Free (RoHS) | CU SNBI | Level-1-260C-UNLIM | -40 to 110 | CJG W | |
| BQ29410DCT3RE6 | NRND | SM8 | DCT | 8 | 3000 | Pb-Free (RoHS) | CU SNBI | Level-1-260C-UNLIM | -40 to 110 | CJG W | |
| BQ29410DCTR | NRND | SM8 | DCT | 8 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | CJG W | |
| BQ29410DCTRG4 | NRND | SM8 | DCT | 8 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | CJG W | |
| BQ29410DCTT | NRND | SM8 | DCT | 8 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | CJG W | |
| BQ29410DCTTG4 | NRND | SM8 | DCT | 8 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | CJG W | |
| BQ29410PW | NRND | TSSOP | PW | 8 | 150 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | 29410 | |
| BQ29410PWR | NRND | TSSOP | PW | 8 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | 29410 | |
| BQ29410PWRG4 | NRND | TSSOP | PW | 8 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 110 | 29410 | |
| BQ29411DCT3R | NRND | SM8 | DCT | 8 | 3000 | Pb-Free (RoHS) | CU SNBI | Level-1-260C-UNLIM | -40 to 110 | CJH W | |
| BQ29411DCT3RE6 | NRND | SM8 | DCT | 8 | 3000 | Pb-Free (RoHS) | CU SNBI | Level-1-260C-UNLIM | -40 to 110 | CJH W | |
| BQ29411DCTR | NRND | SM8 | DCT | 8 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | CJH W | |
| BQ29411DCTRG4 | NRND | SM8 | DCT | 8 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | CJH W | |
| BQ29411DCTT | NRND | SM8 | DCT | 8 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | CJH W | |
| BQ29411DCTTG4 | NRND | SM8 | DCT | 8 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | CJH W | |
| BQ29411PW | NRND | TSSOP | PW | 8 | 150 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | 29411 | |
| BQ29411PWR | NRND | TSSOP | PW | 8 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | 29411 | |

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan (2) | Lead/Ball Finish (6) | MSL Peak Temp (3) | Op Temp (°C) | Device Marking (4/5) | Samples |
|------------------|---------------|--------------|-----------------|------|-------------|-------------------------|-------------------------|----------------------|--------------|-------------------------|---------|
| BQ29411PWRG4 | NRND | TSSOP | PW | 8 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 110 | 29411 | |
| BQ29412DCT3R | NRND | SM8 | DCT | 8 | 3000 | Pb-Free (RoHS) | CU SNBI | Level-1-260C-UNLIM | -40 to 110 | CJJ W | |
| BQ29412DCT3RE6 | NRND | SM8 | DCT | 8 | 3000 | Pb-Free (RoHS) | CU SNBI | Level-1-260C-UNLIM | -40 to 110 | CJJ W | |
| BQ29412DCT3T | PREVIEW | | | 8 | | TBD | Call TI | Call TI | -40 to 110 | | |
| BQ29412DCTR | NRND | SM8 | DCT | 8 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | CJJ W | |
| BQ29412DCTRG4 | NRND | SM8 | DCT | 8 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | CJJ W | |
| BQ29412DCTT | NRND | SM8 | DCT | 8 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | CJJ W | |
| BQ29412DCTTG4 | NRND | SM8 | DCT | 8 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | CJJ W | |
| BQ29412PW | NRND | TSSOP | PW | 8 | 150 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | 29412 | |
| BQ29412PWG4 | NRND | TSSOP | PW | 8 | 150 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 110 | 29412 | |
| BQ29412PWR | NRND | TSSOP | PW | 8 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | | 29412 | |
| BQ29412PWRG4 | NRND | TSSOP | PW | 8 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | | 29412 | |
| BQ29413DCTR | NRND | SM8 | DCT | 8 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | CJK W | |
| BQ29413DCTRG4 | NRND | SM8 | DCT | 8 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | CJK W | |
| BQ29413DCTT | NRND | SM8 | DCT | 8 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | CJK W | |
| BQ29413DCTTG4 | NRND | SM8 | DCT | 8 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | CJK W | |
| BQ29413PW | NRND | TSSOP | PW | 8 | 150 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 110 | 29413 | |
| BQ29413PWG4 | NRND | TSSOP | PW | 8 | 150 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 110 | 29413 | |

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan (2) | Lead/Ball Finish (6) | MSL Peak Temp (3) | Op Temp (°C) | Device Marking (4/5) | Samples |
|------------------|---------------|--------------|-----------------|------|-------------|-------------------------|-------------------------|----------------------|--------------|-------------------------|---------|
| BQ29413PWR | NRND | TSSOP | PW | 8 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 110 | 29413 | |
| BQ29413PWRG4 | NRND | TSSOP | PW | 8 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 110 | 29413 | |
| BQ29414DCTR | NRND | SM8 | DCT | 8 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | CJL W | |
| BQ29414DCTRG4 | NRND | SM8 | DCT | 8 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | CJL W | |
| BQ29414DCTT | NRND | SM8 | DCT | 8 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | CJL W | |
| BQ29414DCTTG4 | NRND | SM8 | DCT | 8 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | CJL W | |
| BQ29414PW | NRND | TSSOP | PW | 8 | 150 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 110 | 2914 | |
| BQ29414PWG4 | NRND | TSSOP | PW | 8 | 150 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 110 | 2914 | |
| BQ29414PWR | NRND | TSSOP | PW | 8 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 110 | 2914 | |
| BQ29414PWRG4 | NRND | TSSOP | PW | 8 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 110 | 2914 | |
| BQ29415DCTR | NRND | SM8 | DCT | 8 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | CJM W | |
| BQ29415DCTRG4 | NRND | SM8 | DCT | 8 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | CJM W | |
| BQ29415DCTT | NRND | SM8 | DCT | 8 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | CJM W | |
| BQ29415DCTTG4 | NRND | SM8 | DCT | 8 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -40 to 110 | CJM W | |
| BQ29415PWR | NRND | TSSOP | PW | 8 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 110 | 2915 | |
| BQ29415PWRG4 | NRND | TSSOP | PW | 8 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 110 | 2915 | |
| BQ29419PW | NRND | TSSOP | PW | 8 | 150 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 110 | 29419 | |
| BQ29419PWG4 | NRND | TSSOP | PW | 8 | 150 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 110 | 29419 | |

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan (2) | Lead/Ball Finish (6) | MSL Peak Temp (3) | Op Temp (°C) | Device Marking (4/5) | Samples |
|------------------|---------------|--------------|-----------------|------|-------------|-------------------------|-------------------------|----------------------|--------------|-------------------------|---------|
| BQ29419PWR | NRND | TSSOP | PW | 8 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 110 | 29419 | |
| BQ29419PWRG4 | NRND | TSSOP | PW | 8 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 110 | 29419 | |

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.



www.ti.com

PACKAGE OPTION ADDENDUM

1-Nov-2013

TAPE AND REEL INFORMATION




QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| BQ29410DCT3R | SM8 | DCT | 8 | 3000 | 180.0 | 13.0 | 3.35 | 4.5 | 1.55 | 4.0 | 12.0 | Q3 |
| BQ29410DCTR | SM8 | DCT | 8 | 3000 | 180.0 | 13.0 | 3.35 | 4.5 | 1.55 | 4.0 | 12.0 | Q3 |
| BQ29410DCTT | SM8 | DCT | 8 | 250 | 180.0 | 13.0 | 3.35 | 4.5 | 1.55 | 4.0 | 12.0 | Q3 |
| BQ29410PWR | TSSOP | PW | 8 | 2000 | 330.0 | 12.4 | 7.0 | 3.6 | 1.6 | 8.0 | 12.0 | Q1 |
| BQ29410PWRG4 | TSSOP | PW | 8 | 2000 | 330.0 | 12.4 | 7.0 | 3.6 | 1.6 | 8.0 | 12.0 | Q1 |
| BQ29411DCT3R | SM8 | DCT | 8 | 3000 | 180.0 | 13.0 | 3.35 | 4.5 | 1.55 | 4.0 | 12.0 | Q3 |
| BQ29411DCTR | SM8 | DCT | 8 | 3000 | 180.0 | 13.0 | 3.35 | 4.5 | 1.55 | 4.0 | 12.0 | Q3 |
| BQ29411DCTT | SM8 | DCT | 8 | 250 | 180.0 | 13.0 | 3.35 | 4.5 | 1.55 | 4.0 | 12.0 | Q3 |
| BQ29411PWR | TSSOP | PW | 8 | 2000 | 330.0 | 12.4 | 7.0 | 3.6 | 1.6 | 8.0 | 12.0 | Q1 |
| BQ29411PWRG4 | TSSOP | PW | 8 | 2000 | 330.0 | 12.4 | 7.0 | 3.6 | 1.6 | 8.0 | 12.0 | Q1 |
| BQ29413DCTR | SM8 | DCT | 8 | 3000 | 180.0 | 13.0 | 3.35 | 4.5 | 1.55 | 4.0 | 12.0 | Q3 |
| BQ29413DCTT | SM8 | DCT | 8 | 250 | 180.0 | 13.0 | 3.35 | 4.5 | 1.55 | 4.0 | 12.0 | Q3 |
| BQ29413PWR | TSSOP | PW | 8 | 2000 | 330.0 | 12.4 | 7.0 | 3.6 | 1.6 | 8.0 | 12.0 | Q1 |
| BQ29414DCTR | SM8 | DCT | 8 | 3000 | 180.0 | 13.0 | 3.35 | 4.5 | 1.55 | 4.0 | 12.0 | Q3 |
| BQ29414DCTT | SM8 | DCT | 8 | 250 | 180.0 | 13.0 | 3.35 | 4.5 | 1.55 | 4.0 | 12.0 | Q3 |
| BQ29414PWR | TSSOP | PW | 8 | 2000 | 330.0 | 12.4 | 7.0 | 3.6 | 1.6 | 8.0 | 12.0 | Q1 |
| BQ29415DCTR | SM8 | DCT | 8 | 3000 | 180.0 | 13.0 | 3.35 | 4.5 | 1.55 | 4.0 | 12.0 | Q3 |
| BQ29415DCTT | SM8 | DCT | 8 | 250 | 180.0 | 13.0 | 3.35 | 4.5 | 1.55 | 4.0 | 12.0 | Q3 |

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| BQ29415PWR | TSSOP | PW | 8 | 2000 | 330.0 | 12.4 | 7.0 | 3.6 | 1.6 | 8.0 | 12.0 | Q1 |
| BQ29419PWR | TSSOP | PW | 8 | 2000 | 330.0 | 12.4 | 7.0 | 3.6 | 1.6 | 8.0 | 12.0 | Q1 |

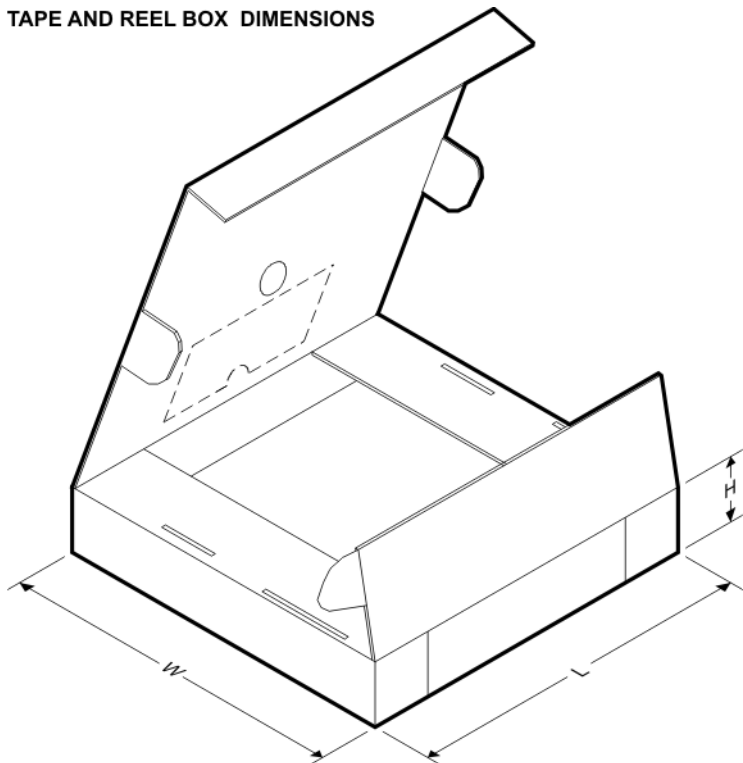TAPE AND REEL BOX DIMENSIONS


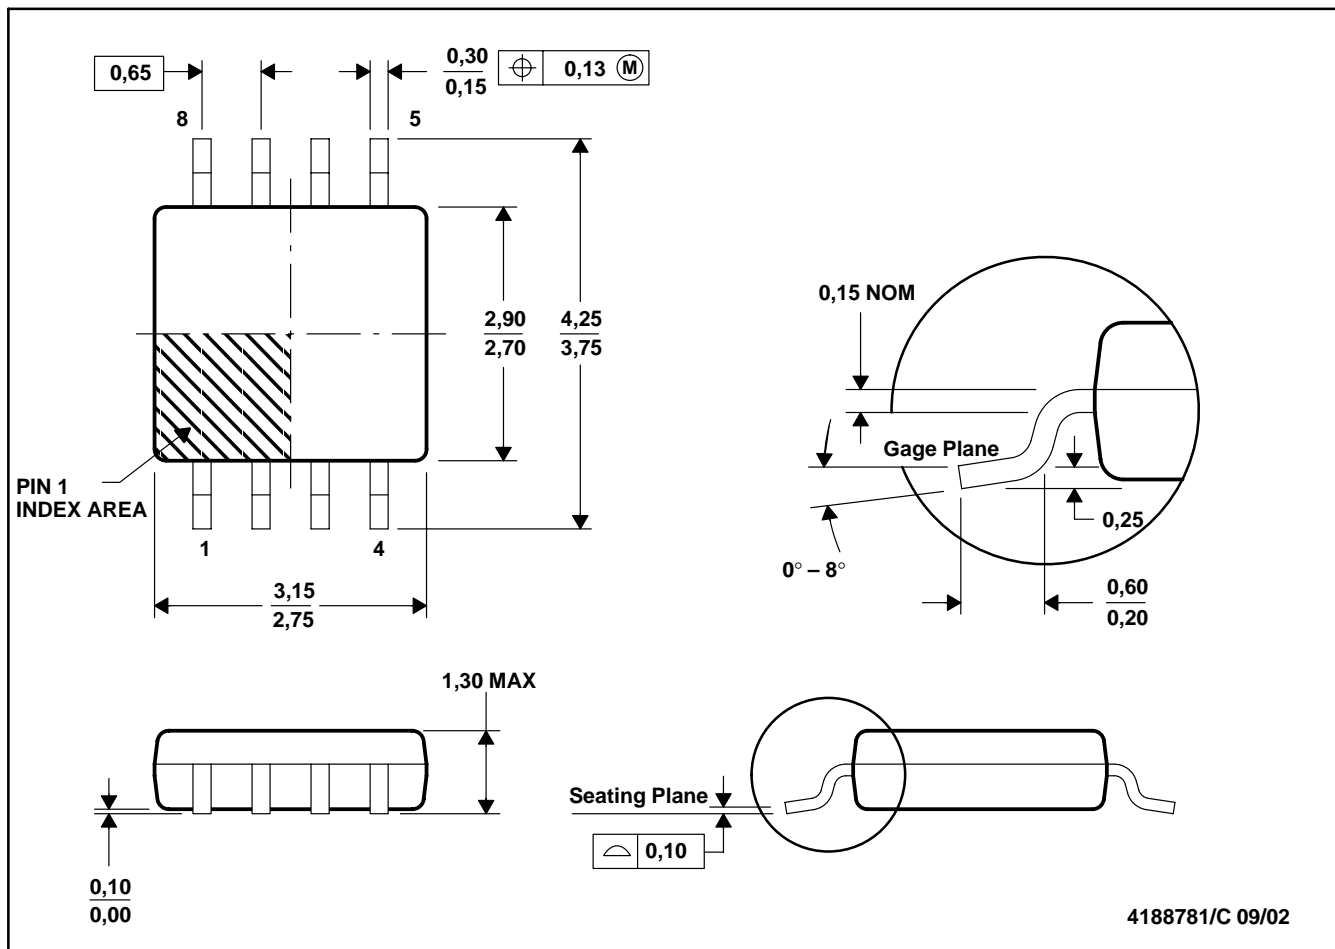
*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| BQ29410DCT3R | SM8 | DCT | 8 | 3000 | 182.0 | 182.0 | 20.0 |
| BQ29410DCTR | SM8 | DCT | 8 | 3000 | 182.0 | 182.0 | 20.0 |
| BQ29410DCTT | SM8 | DCT | 8 | 250 | 182.0 | 182.0 | 20.0 |
| BQ29410PWR | TSSOP | PW | 8 | 2000 | 367.0 | 367.0 | 35.0 |
| BQ29410PWRG4 | TSSOP | PW | 8 | 2000 | 367.0 | 367.0 | 35.0 |
| BQ29411DCT3R | SM8 | DCT | 8 | 3000 | 182.0 | 182.0 | 20.0 |
| BQ29411DCTR | SM8 | DCT | 8 | 3000 | 182.0 | 182.0 | 20.0 |
| BQ29411DCTT | SM8 | DCT | 8 | 250 | 182.0 | 182.0 | 20.0 |
| BQ29411PWR | TSSOP | PW | 8 | 2000 | 367.0 | 367.0 | 35.0 |
| BQ29411PWRG4 | TSSOP | PW | 8 | 2000 | 367.0 | 367.0 | 35.0 |
| BQ29413DCTR | SM8 | DCT | 8 | 3000 | 182.0 | 182.0 | 20.0 |
| BQ29413DCTT | SM8 | DCT | 8 | 250 | 182.0 | 182.0 | 20.0 |
| BQ29413PWR | TSSOP | PW | 8 | 2000 | 367.0 | 367.0 | 35.0 |
| BQ29414DCTR | SM8 | DCT | 8 | 3000 | 182.0 | 182.0 | 20.0 |
| BQ29414DCTT | SM8 | DCT | 8 | 250 | 182.0 | 182.0 | 20.0 |

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|-------------|--------------|-----------------|------|------|-------------|------------|-------------|
| BQ29414PWR | TSSOP | PW | 8 | 2000 | 367.0 | 367.0 | 35.0 |
| BQ29415DCTR | SM8 | DCT | 8 | 3000 | 182.0 | 182.0 | 20.0 |
| BQ29415DCTT | SM8 | DCT | 8 | 250 | 182.0 | 182.0 | 20.0 |
| BQ29415PWR | TSSOP | PW | 8 | 2000 | 367.0 | 367.0 | 35.0 |
| BQ29419PWR | TSSOP | PW | 8 | 2000 | 367.0 | 367.0 | 35.0 |

DCT (R-PDSO-G8)


PLASTIC SMALL-OUTLINE PACKAGE



- NOTES: A. All linear dimensions are in millimeters.
 B. This drawing is subject to change without notice.
 C. Body dimensions do not include mold flash or protrusion
 D. Falls within JEDEC MO-187 variation DA.

DCT (R-PDSO-G8)


PLASTIC SMALL OUTLINE

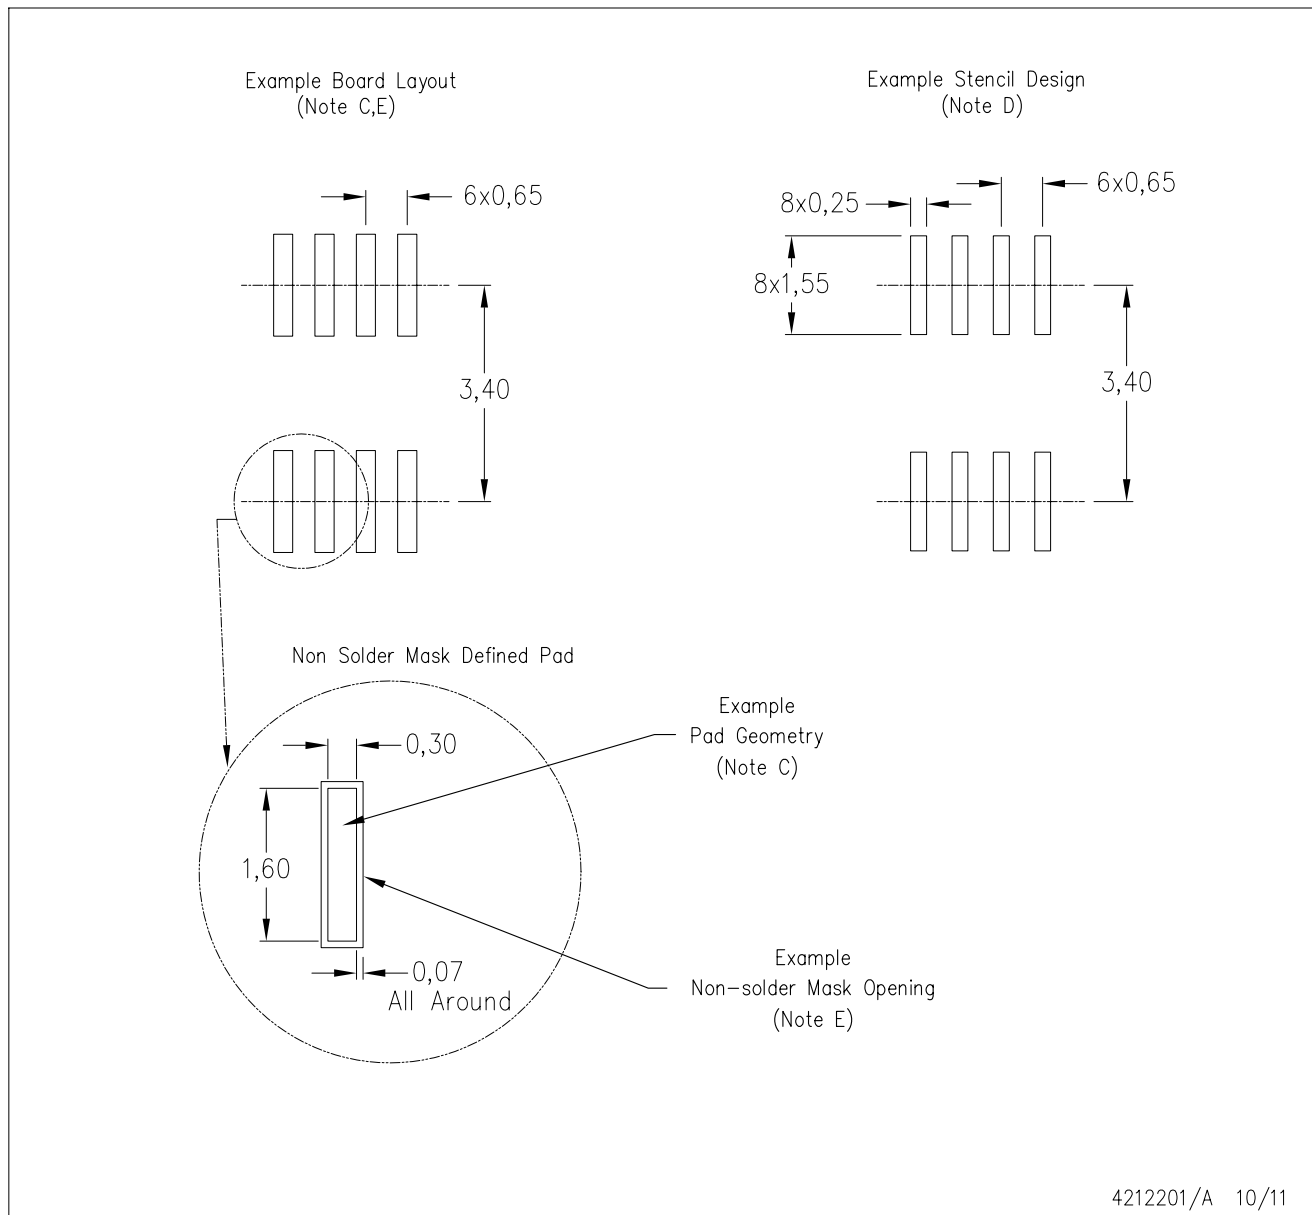

- NOTES:
- All linear dimensions are in millimeters.
 - This drawing is subject to change without notice.
 - Publication IPC-7351 is recommended for alternate designs.
 - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525.
 - Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

PW (R-PDSO-G8)

PLASTIC SMALL OUTLINE

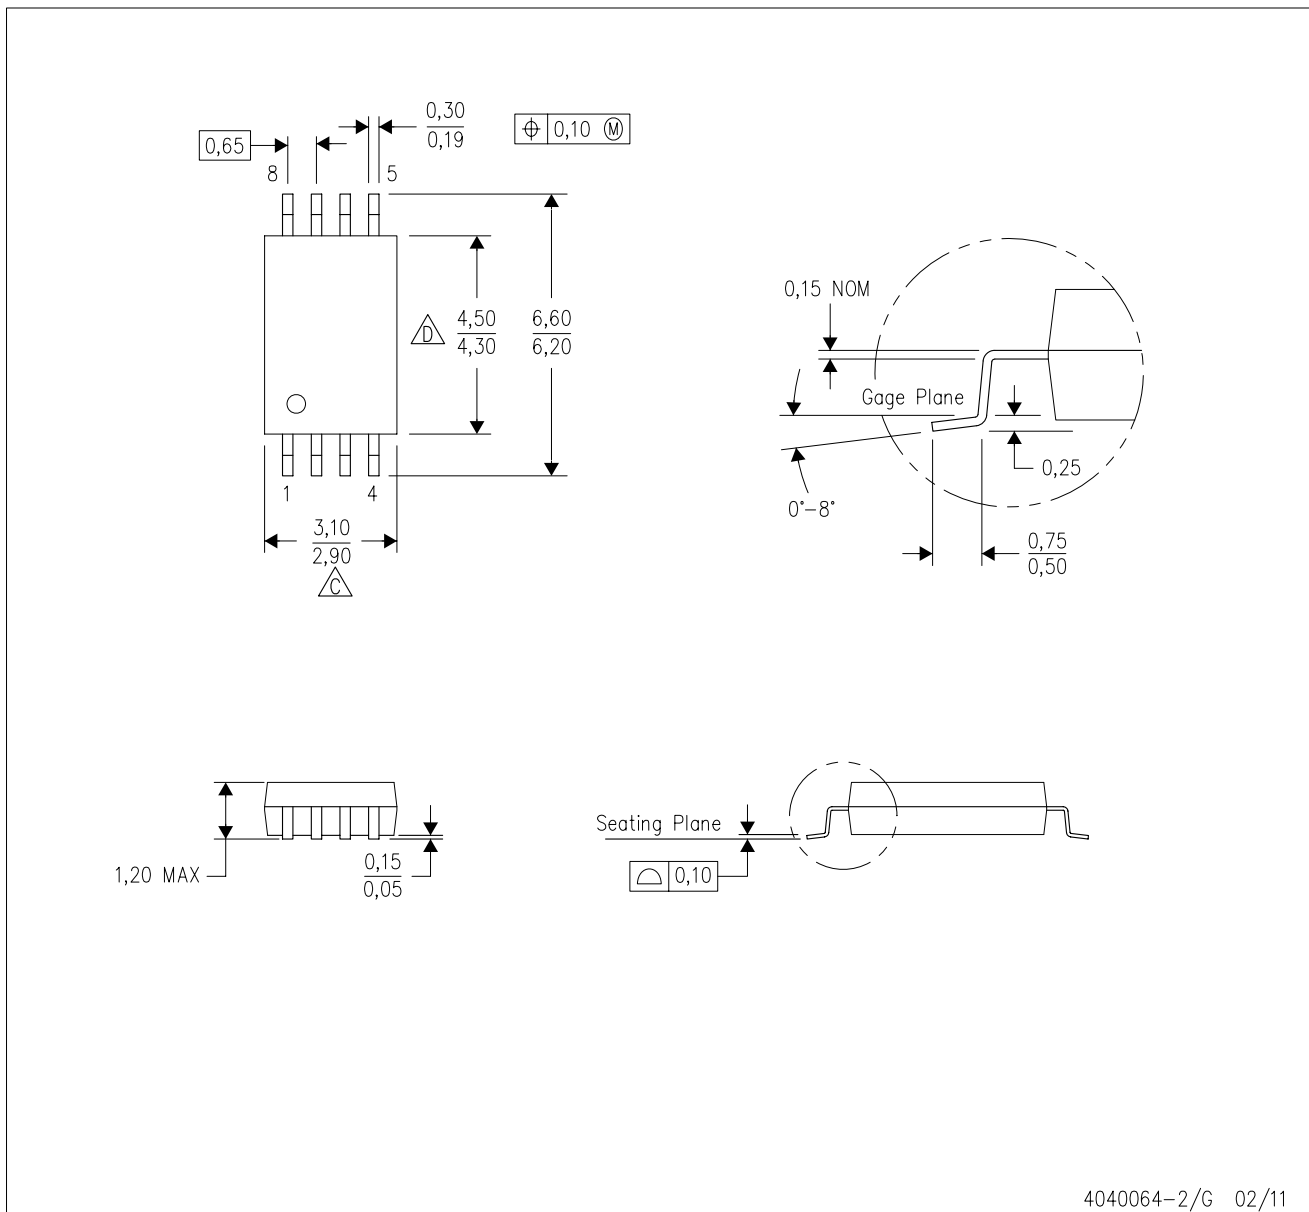

4040064-2/G 02/11

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
 - B. This drawing is subject to change without notice.
 - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
 - D. Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
 - E. Falls within JEDEC MO-153

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

| | |
|------------------------------|--|
| Audio | www.ti.com/audio |
| Amplifiers | amplifier.ti.com |
| Data Converters | dataconverter.ti.com |
| DLP® Products | www.dlp.com |
| DSP | dsp.ti.com |
| Clocks and Timers | www.ti.com/clocks |
| Interface | interface.ti.com |
| Logic | logic.ti.com |
| Power Mgmt | power.ti.com |
| Microcontrollers | microcontroller.ti.com |
| RFID | www.ti-rfid.com |
| OMAP Applications Processors | www.ti.com/omap |
| Wireless Connectivity | www.ti.com/wirelessconnectivity |

Applications

| | |
|-------------------------------|--|
| Automotive and Transportation | www.ti.com/automotive |
| Communications and Telecom | www.ti.com/communications |
| Computers and Peripherals | www.ti.com/computers |
| Consumer Electronics | www.ti.com/consumer-apps |
| Energy and Lighting | www.ti.com/energy |
| Industrial | www.ti.com/industrial |
| Medical | www.ti.com/medical |
| Security | www.ti.com/security |
| Space, Avionics and Defense | www.ti.com/space-avionics-defense |
| Video and Imaging | www.ti.com/video |

TI E2E Community

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2013, Texas Instruments Incorporated