

ALUMINUM ELECTROLYTIC CAPACITORS



Wide Temperature Range, Miniature Type Permissible
Abnormal Voltage
series


nichicon

- Improved safety feature for abnormally excessive voltage.
- High ripple current product.
- Compliant to the RoHS directive (2002/95/EC).



AQ
Smaller



AS

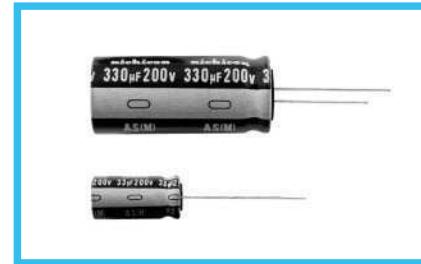

■ Specifications

Item		Performance Characteristics								
Category Temperature Range	-40 to +105°C									
Rated Voltage Range	200V									
Rated Capacitance Range	33 to 330μF									
Capacitance Tolerance	±20% at 120Hz, 20°C									
Leakage Current	After 1 minute's application of rated voltage, leakage current is 0.04CV+100 (μA) or less.									
Tangent of loss angle (tan δ)	Rated voltage (V) tan δ (MAX.)	200 0.15	Measurement frequency:120Hz, Temperature:20°C							
Stability at Low Temperature	Rated voltage (V)		200	Measurement frequency : 120Hz						
	Impedance ratio ZT / Z20 (MAX.)		Z-25°C / Z+20°C Z-40°C / Z+20°C	3 6						
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 2000 hours at 105°C, the peak voltage shall not exceed the rated voltage.			<table border="1"> <tr> <td>Capacitance change</td><td>Within ±20% of the initial capacitance value</td></tr> <tr> <td>tan δ</td><td>200% or less than the initial specified value</td></tr> <tr> <td>Leakage current</td><td>Less than or equal to the initial specified value</td></tr> </table>	Capacitance change	Within ±20% of the initial capacitance value	tan δ	200% or less than the initial specified value	Leakage current	Less than or equal to the initial specified value
Capacitance change	Within ±20% of the initial capacitance value									
tan δ	200% or less than the initial specified value									
Leakage current	Less than or equal to the initial specified value									
Shelf Life	After leaving capacitors under no load at 105°C for 1000 hours they shall meet the specified values for the endurance characteristics listed above.									
Safety Performance	The pressure relief vent will operate in normal conditions, with no dangerous conditions such as flames, ignitions or dispersion of pieces of the capacitor and / or case.									
	voltage (V)		Test conditions							
	200		Limited DC current 4A (5A : 330μF)	Test Voltage 300VDC and 375VDC						
Marking	Printed with white color letter on dark brown sleeve.									

■ Radial Lead Type

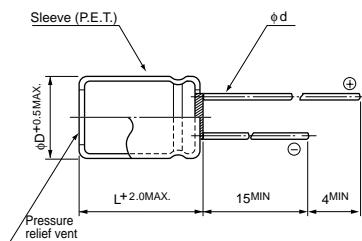


(mm)				
φD	10	12.5	16	18
P	5.0	5.0	7.5	7.5
φd	0.6	0.6*	0.8	0.8

*In case L>25 for φ12.5 (D) case sizes, lead diameter φ0.8 (d) will be applied.

- Please refer to page 20 about the end seal configuration.

Type numbering system (Example : 200V 220μF)

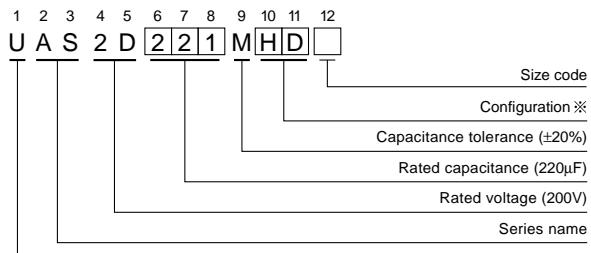

※ Configuration

φ D	Pb-free leadwire Pb-free PET sleeve
10	PD
12.5 to 18	HD

■ Dimensions

Cap.(μF)	Code	V	200 (2D)				Case size φD × L (mm)	Rated ripple
			φ10	φ12.5	φ16	φ18		
33	330	10 × 20	160					
47	470	10 × 25	195	▲12.5 × 20	195			
56	560			12.5 × 20	210			
68	680			12.5 × 25	320			
82	820			12.5 × 25	360			
100	101			12.5 × 31.5	430	▲16 × 20	430	
150	151					16 × 25	460	▲18 × 20
180	181					16 × 31.5	600	▲18 × 25
220	221							18 × 31.5
270	271							18 × 35.5
330	331							18 × 40

Rated ripple current (mAmps) at 105°C 120Hz

▲: In this case, [6] will be put at 12th digit of type numbering system.

● Frequency coefficient of rated ripple current

Frequency	50, 60Hz	120Hz	300Hz	1kHz	10kHz or more
Coefficient	0.80	1.00	1.25	1.40	1.60

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

CAT.8100Y